


# CONWAY SRTS I (2011)




FAULKNER COUNTY

F.A.P. NO. SRSI - 1402(92)

AHTD JOB 080456

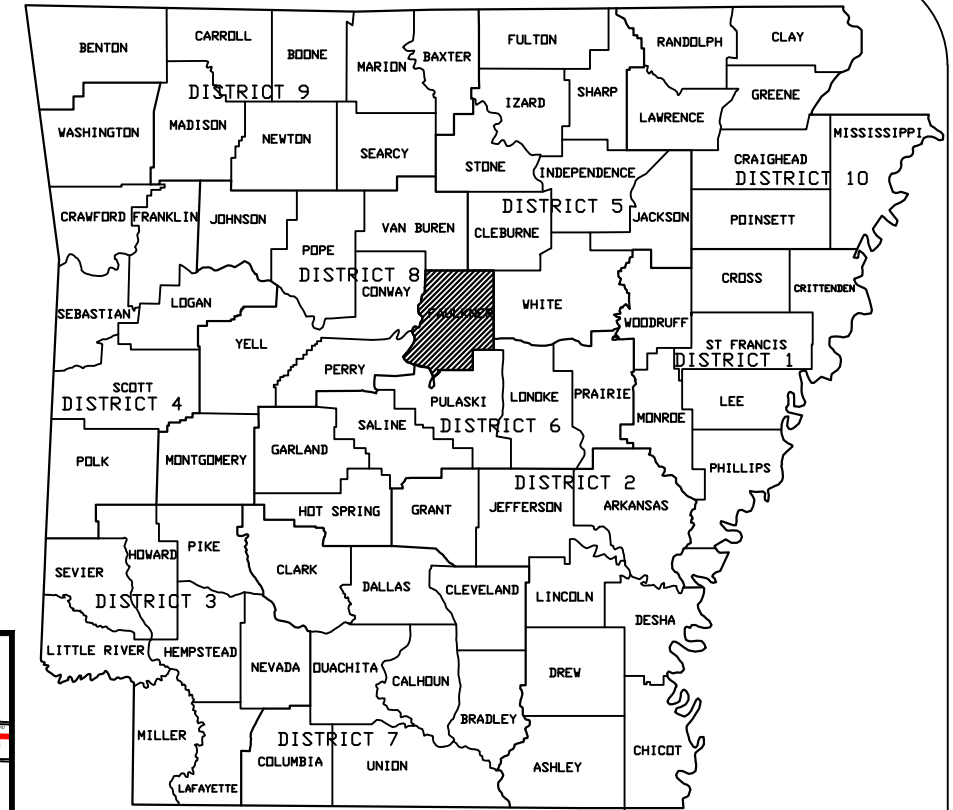

ARK. HWY. DIST. NO. 8

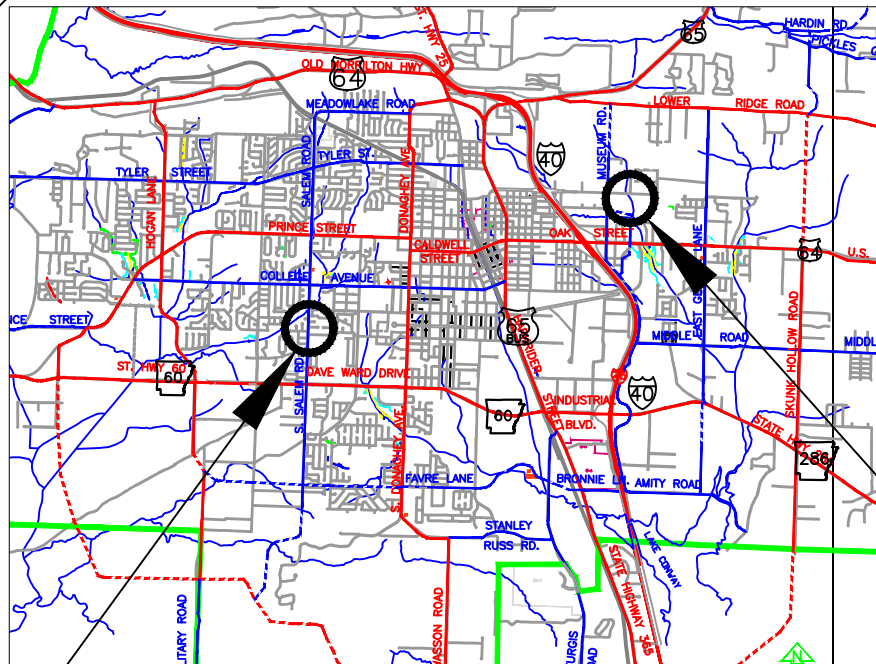

VICINITY MAP

**SITE #1, 2, & 4**  
LOCATIONS

MID-POINT OF SITE #1  
LAT. 35° 04' 57" NORTH  
LON. 92° 28' 18" WEST

**SITE #4**  
Salem Road

BEGIN-POINT OF SITE #1  
LAT. 35° 04' 38" NORTH  
LON. 92° 28' 25" WEST

MID-POINT OF SITE #1  
LAT. 35° 04' 38" NORTH  
LON. 92° 28' 20" WEST

**SITE #1**  
Celia Drive


END-POINT OF SITE #1  
LAT. 35° 04' 38" NORTH  
LON. 92° 28' 19" WEST

BEGIN-POINT OF SITE #2  
LAT. 35° 04' 40" NORTH  
LON. 92° 28' 18" WEST

MID-POINT OF SITE #2  
LAT. 35° 04' 40" NORTH  
LON. 92° 28' 11" WEST

END-POINT OF SITE #2  
LAT. 35° 04' 40" NORTH  
LON. 92° 28' 03" WEST

**SITE #2**  
Carl Stuart Rd.

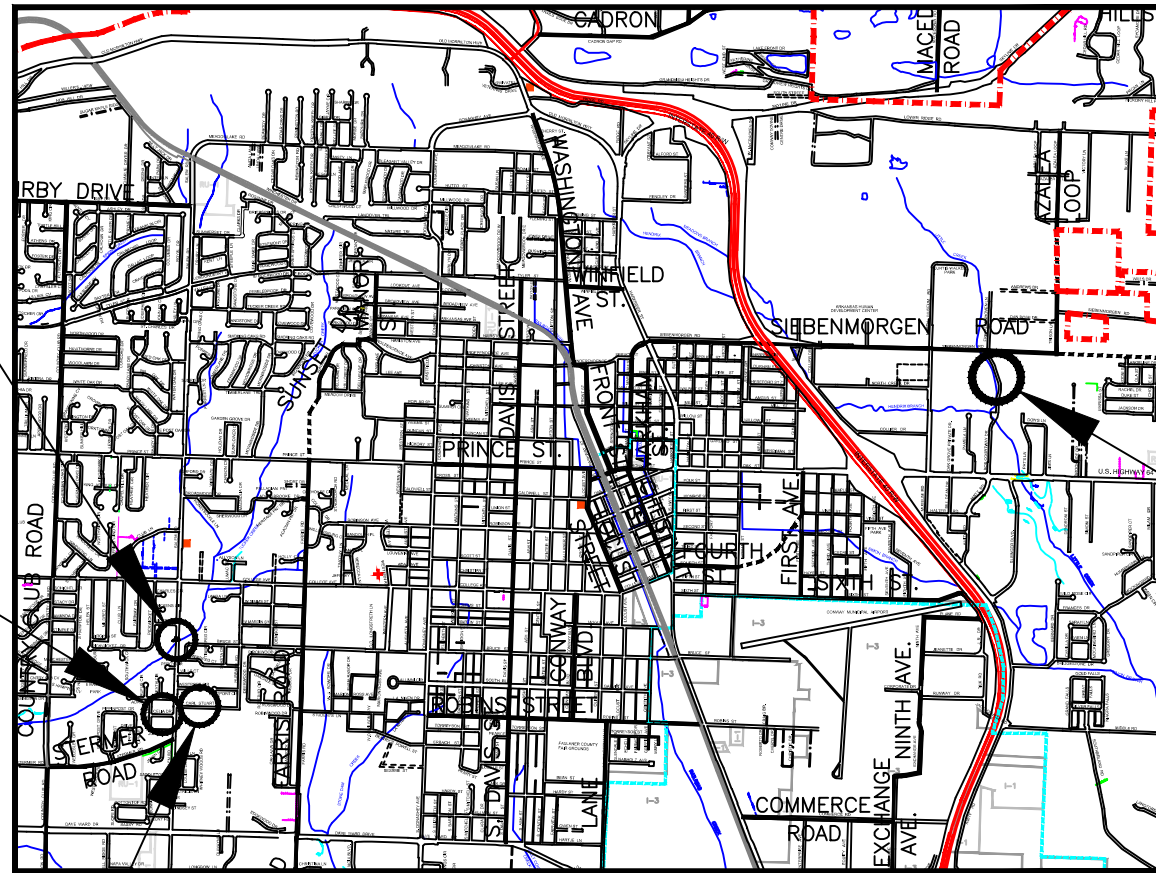


NOT TO SCALE

**SITE #3**  
Bob Courtway Dr.

BEGIN-POINT OF SITE #3  
LAT. 35° 05' 46" NORTH  
LON. 92° 24' 48" WEST

MID-POINT OF SITE #3  
LAT. 35° 05' 49" NORTH  
LON. 92° 24' 50" WEST

END-POINT OF SITE #3  
LAT. 35° 05' 55" NORTH  
LON. 92° 24' 51" WEST



CITY OF CONWAY, ARKANSAS  
STREET & ENGINEERING DEPARTMENT  
100 EAST RONBINS  
CONWAY, ARKANSAS 72034  
501-450-6165

CONWAY SRTS 1 (2011)  
AHTD JOB #080456  
CONWAY, ARKANSAS

TITLE SHEET

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV	SHEET
CHECKED BY: EJP	1
DATE: 6/2/16	
SCALE: N.T.S.	

**INDEX OF SHEETS**

SHEET NO.	ITEM	DATE
1	TITLE SHEET	
2	SHEET INDEX, GEN. NOTES, IMPROVEMENT SUMMARY, SPECS.	
3	SIDEWALK IMPROVEMENT QUANTITIES	
4	PEDESTRIAN HYBRID BEACON NOTES & QUANTITIES	
5	CELIA DRIVE SIDEWALK IMPROVEMENTS	
6	CARL STUART DRIVE SIDEWALK IMPROVEMENTS	
7	CARL STUART DRIVE SIDEWALK IMPROVEMENTS	
8	BOB COURTWAY DRIVE SIDEWALK IMPROVEMENTS	
9	BOB COURTWAY DRIVE SIDEWALK IMPROVEMENTS	
10	PEDESTRIAN HYBRID BEACON SIGNAL PLAN	
11	PEDESTRIAN HYBRID BEACON WIRING DIAGRAM	
FES-1	FLARED END SECTION	10-18-96
FES-2	FLARED END SECTION	10-18-96
FPC-9E	DETAILS OF DROP INLETS (TYPE C)	8-22-02
PCC-1	CONCRETE PIPE CULVERT FILL HEIGHTS & BEDDING	2-27-14
SD-5	CONTROLLER CABINET UTILITY DRAWER	9-12-13
SD-6	HEAVY DUTY PULL BOX	9-2-15
SD-8	SIGNAL HEAD PLACEMENT	9-12-13
SD-11	STEEL POLE WITH MAST ARM	2-27-14
SD-12	SERVICE POINT	9-12-13
TC-1	STANDARD TRAFFIC CONTROLS	9-12-15
TEC-1	TEMPORARY EROSION CONTROL DEVICES	12-15-11
WR-1	WHEELCHAIR RAMPS	11-10-05

**SIDEWALK IMPROVEMENT SUMMARY**

ITEM NO.	ITEM	QUANTITY	UNIT
SP & 201-209	SITE PREPARATION	1	L.S.
SP & 210-216	EARTHWORK	1	L.S.
SP & 501	CONCRETE SIDEWALK	1400	S.Y.
603	MAINTENANCE OF TRAFFIC	1	L.S.
SP & 606	18" R.C. PIPE CULVERTS	8	L.F.
SP & 606	30" R.C. PIPE CULVERTS	8	L.F.
SP & 609	DROP INLET (TYPE C)	2	L.S.
621	SILT FENCE	1000	L.F.
621	WATTLE (12")	100	L.F.
SP & 624	SOLID SODDING	1100	S.Y.
635	ROADWAY CONSTRUCTION CONTROL	1	L.S.
SP & 641	WHEELCHAIR RAMP	100	S.Y.

**GOVERNING SPECIFICATIONS**

NUMBER	TITLE
ERRATA	ERRATA FOR THE BOOK OF STANDARD SPECIFICATIONS
FHWA-1273	REQUIRED CONTRACT PROVISIONS FEDERAL AID CONSTRUCTION CONTRACTS
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - NOTICE TO CONTRACTORS
FHWA-1273	SUPPLEMENT - SPECIFIC EQUAL EMPLOYMENT OPPORTUNITY RESPONSIBILITIES (23 U.S.C. 140)
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - GOALS AND TIMETABLES
FHWA-1273	SUPPLEMENT - EQUAL EMPLOYMENT OPPORTUNITY - FEDERAL STANDARDS
FHWA-1273	SUPPLEMENT - POSTERS AND NOTICES REQUIRED FOR FEDERAL-AID PROJECTS
FHWA-1273	SUPPLEMENT - WAGE RATE DETERMINATION
FHWA-1273	SUPPLEMENT - REVISIONS OF FHWA-1273 FOR OFF-SYSTEM PROJECTS
SS 100-3	DISADVANTAGED BUSINESS ENTERPRISE IN HIGHWAY CONSTRUCTION
AHTD SP-1	REVISED STANDARD DOT TITLE VI ASSURANCE - OCTOBER 2011
1	STANDARD SPECIFICATIONS
2	SITE PREPARATION
3	EARTHWORK
4	UNCLASSIFIED EXCAVATION
5	CONCRETE SIDEWALKS AND WHEELCHAIR RAMPS
6	CONCRETE AND REINFORCING STEEL
7	PIPE CULVERTS
8	INLETS AND JUNCTION BOXES
9	SEEDING AND SOD
10	LED TRAFFIC SIGNAL HEAD
11	LED COUNTDOWN PEDESTRIAN SIGNAL HEAD
12	ELECTRICAL CONDUCTORS-IN-CONDUIT
13	SERVICE POINT ASSEMBLY
14	CONCRETE PULL BOX
15	TRAFFIC SIGNAL MAST ARMS AND POLES

**GENERAL NOTES:**

- ALL UTILITIES TO BE MOVED OR LOWERED BY THE RESPECTIVE OWNERS AS PER AGREEMENT WITH SUCH OWNERS.
- ANY EQUIPMENT OR APPURTENANCE THAT INTERFERES WITH THE PROPOSED CONSTRUCTION AND WHICH MAY BE THE PROPERTY OF UTILITY SERVICE ORGANIZATIONS SHALL BE MOVED BY THE OWNERS UNLESS OTHERWISE PROVIDED.
- CONTRACTOR RESPONSIBLE FOR MAINTAINING U.S. MAILBOXES WITHIN THE PROJECT LIMITS. MAIL SERVICE SHALL NOT BE INTERRUPTED.
- ALL TREES THAT DO NOT DIRECTLY INTERFERE WITH THE PROPOSED CONSTRUCTION SHALL BE SPARED AS DIRECTED BY THE ENGINEER. CARE AND DISCRETION SHALL BE USED TO INSURE THAT ALL TREES NOT REMOVED SHALL BE HARMED AS LITTLE AS POSSIBLE DURING THE CONSTRUCTION OPERATION.
- ALL PARTS OF THIS DESIGN & INSTALLATION SHALL BE IN ACCORDANCE WITH THE ARKANSAS STATE HIGHWAY AND TRANSPORTATION DEPARTMENT STANDARD SPECIFICATIONS AND DETAILS (EXCEPT WHERE SUPERCEDED BY PROVIDED SPECIAL PROVISIONS), A.D.A. STANDARDS FOR ACCESSIBLE DESIGN, AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITIONS.
- CONTRACTOR SHALL NOTIFY ALL EXISTING UTILITY OWNERS BEFORE BEGINNING WORK ON THIS PROJECT.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING UTILITIES OR SERVICE LINES CROSSED OR EXPOSED BY CONSTRUCTION OPERATIONS. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN, OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, AT THE CONTRACTOR'S EXPENSE.
- THE CONTRACTOR IS RESPONSIBLE FOR KEEPING STREETS AND SIDEWALKS ADJACENT TO PROJECT FREE OF MUD AND DEBRIS. BEST MANAGEMENT PRACTICES SHALL BE IMPLEMENTED WHERE NECESSARY FOR STORM WATER MANAGEMENT POLLUTION PREVENTION PLAN AS DIRECTED BY THE ENGINEER.
- RIGHT-OF-WAY FILED WITH FAULKNER COUNTY CIRCUIT CLERK 02/17/1989, BOOK 'G', PAGE 51.
- DISTURBED AREA UNDER ONE ACRE AND THEREFORE NO EROSION CONTROL MEASURES OR PERMITS REQUIRED



CITY OF CONWAY, ARKANSAS  
STREET & ENGINEERING DEPARTMENT  
100 EAST RONBINS  
CONWAY, ARKANSAS 72034  
501-450-6165

CONWAY SRTS 1 (2011)  
AHTD JOB #080456  
CONWAY, ARKANSAS

SHEET INDEX  
GENERAL NOTES  
SIDEWALK IMPROVEMENT QUANTITIES

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV  
CHECKED BY: EJP  
DATE: 6/2/16  
SCALE: N.T.S.

SHEET

2

CONCRETE WALKS

STATION	STATION	LOCATION	LENGTH	CONCRETE WALK
			LIN. FT	SQ. YDS
0+00.00	0+00.00	W. OF C.L. JOANNA DR.	16.0	9
0+37.68	0+68.34	N. OF C.L. CELIA DR.	31.0	17
0+88.77	1+71.54	N. OF C.L. CELIA DR.	83.0	46
1+90.73	2+42.23	N. OF C.L. CELIA DR.	52.0	29
2+60.44	2+83.40	N. OF C.L. CELIA DR.	23.0	13
3+00.79	3+49.61	N. OF C.L. CELIA DR.	49.0	27
3+69.05	4+55.20	N. OF C.L. CELIA DR.	87.0	48
4+73.24	5+05.46	N. OF C.L. CELIA DR.	33.0	18
0+00.00	1+78.49	S. OF C.L. CARL STUART DR.	179.0	99
2+22.63	2+94.23	S. OF C.L. CARL STUART DR.	72.0	40
3+37.20	5+06.10	S. OF C.L. CARL STUART DR.	169.0	94
5+60.25	6+15.41	S. OF C.L. CARL STUART DR.	56.0	31
9+68.18	12+20.45	S. OF C.L. CARL STUART DR.	253.0	141
12+63.00	12+68.00	S. OF C.L. CARL STUART DR.	5.0	3
0+00.00	3+17.85	E. OF C.L. BOB COURTWAY DR.	318.0	177
3+57.90	12+00.00	E. OF C.L. BOB COURTWAY DR.	843.0	468
		TOTAL:	2269.0	1261

EROSION CONTROL

STATION	STATION	LOCATION	SILT FENCE	WATTLE (12")	SOLID SODDING
			LIN. FT.	LIN. FT.	SQ. YD.
0+00.00	5+13.00	CELIA DRIVE	200	20	250
0+00.00	12+55.00	CARL STUART DRIVE	400	20	450
0+00.00	12+00.00	BOB COURTWAY DRIVE	400	60	400
		TOTAL:	1000	100	1100

WHEEL CHAIR RAMPS

STATION	LOCATION	TYPE 2	TYPE 3	TYPE 5
		SQ. YD.	SQ. YD.	SQ. YD.
0+00.00	W. OF C.L. JOANNA DR.			5
0+33.50	N. OF C.L. CELIA DR.	8		
0+42.60	N. OF C.L. CELIA DR.	8		
1+80.00	S. OF C.L. CARL STUART DR.		9	
2+20.00	S. OF C.L. CARL STUART DR.		4	
2+95.00	S. OF C.L. CARL STUART DR.		4	
3+40.00	S. OF C.L. CARL STUART DR.		4	
5+10.00	S. OF C.L. CARL STUART DR.		4	
5+60.00	S. OF C.L. CARL STUART DR.		4	
12+25.00	S. OF C.L. CARL STUART DR.		3	
12+60.00	S. OF C.L. CARL STUART DR.		3	
3+25.00	E. OF C.L. BOB COURTWAY DR.		4	
3+55.00	E. OF C.L. BOB COURTWAY DR.		4	
	TOTAL:	16	43	5

DRAINAGE STRUCTURES

STATION	LOCATION	RCP CLASS III (LIN. FT.)		STRAIGHT TYPE HEADWALL	DROP INLET
		18"	30"		
		LINEAL FEET		EACH	EACH
5+65.00	S. OF C.L. CARL STUART DR.		8		
7+65.00	E. OF C.L. BOB COURTWAY DR.	6			
5+65.00	S. OF C.L. CARL STUART DR.			1	
7+65.00	E. OF C.L. BOB COURTWAY DR.				1
	TOTAL:	6	8	1	1



CITY OF CONWAY, ARKANSAS  
 STREET & ENGINEERING DEPARTMENT  
 100 EAST RONBINS  
 CONWAY, ARKANSAS 72034  
 501-450-6165

CONWAY SRTS 1 (2011)  
 AHTD JOB #080456  
 CONWAY, ARKANSAS

PEDESTRIAN HYBRID BEACON  
 NOTES & QUANTITIES

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV	SHEET <b>3</b>
CHECKED BY: EJP	
DATE: 6/2/16	
SCALE: N.T.S.	

**PEDESTRIAN HYBRID BEACON NOTES:**

1. PERFORM ELECTRICAL WORK IN ACCORDANCE WITH THE CURRENT EDITIONS OF THE NFPA 70 (2014) NATIONAL ELECTRICAL CODE, NFPA 101 (2012) LIFE SAFETY CODE, STATE ELECTRICAL CODE AND LOCAL ELECTRICAL CODE.
2. EXTEND GREEN EQUIPMENT GROUNDING CONDUCTOR (EGC) FROM GROUND BAR AT MAIN BREAKER TO CONTROL PANEL AND TO FIRST POLE. SOLIDLY BOND EGC TO GROUND LUG OF CONTROL CABINET AND TO POLE GROUND. ENSURE THAT ONLY ONE NEUTRAL-TO-GROUND BOND EXISTS IN THE SYSTEM AND THAT IT IS AT THE MAIN BREAKER.
3. ELECTRICAL SERVICE SHALL BE PROVIDED BY THE CITY TO A SERVICE POLE WITH EXTERNAL RAIN-TIGHT BREAKER (MAIN BREAKER), GALVANIZED STEEL SERVICE RISER, METER LOOP (IF REQUIRED), AND WEATHERHEAD AT A MUTUALLY ACCEPTABLE POINT WITHIN THE RIGHT-OF-WAY. THE CONTRACTOR SHALL PROVIDE AND INSTALL A SEPARATE TWO CIRCUIT EXTERNAL BREAKER (SECONDARY BREAKER) ON OR NEAR THE TRAFFIC SIGNAL CONTROLLER CABINET AND SHALL INSTALL CONDUIT, ELECTRICAL SERVICE WIRE (2C/#6 USE RATED, WITH GROUND TYPICAL), AND PERFORM WIRING TO TAP INTO THE CITY'S MAIN BREAKER AS PART OF THIS CONTRACT. CONDUIT IS PAID FOR AS A SEPARATE ITEM OF THIS CONTRACT. TWO CIRCUIT BREAKERS, CONSIDERED SUBSIDIARY TO THE CONTROL EQUIPMENT WHERE STREET LIGHTING IS INCLUDED. AS PART OF THE SIGNAL INSTALLATION, STREET LIGHTING CIRCUIT (2C/#12 AWG UF RATED, TYPICAL) SHALL BE KEPT FROM THE CIRCUIT SERVING THE TRAFFIC SIGNAL CONTROL EQUIPMENT FROM THE POINT OF TIE-IN AT THE SECONDARY BREAKER PROVIDED BY THE CONTRACTOR.
4. CONTRACTOR SHALL CONNECT A SEPARATE NEUTRAL FOR EACH NEW LOAD SWITCH REPRESENTED ON EACH NEW SIGNAL POLE.
5. CONTROLLER CABINET AND LAYOUT SHALL BE SUCH THAT IT IS NOT NECESSARY TO SHUT DOWN POWER OR REMOVE LOAD SWITCHES IN ORDER TO EASILY TEST OR MODIFY DETECTOR INPUTS TO THE CONTROLLER.
6. CONTROLLER CABINET SHALL BE WIRED SUCH THAT DURING FLASH OPERATIONS POWER TO THE LOAD SWITCHES CANNOT BACKFEED TO LOAD SWITCH POWER BUSS.
7. ALL NEW PARTS OF THIS INSTALLATION SHALL BE IN ACCORDANCE WITH THE ARKANSAS HIGHWAY AND TRANSPORTATION DEPARTMENT STANDARDS AND DETAILS AND WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITIONS.
8. NEW CONDUIT INSTALLED UNDER ROADWAY SURFACES SHALL BE INSTALLED BY PUSHING OR BORING METHODS. IF THE ENGINEER DETERMINES THIS IS NOT FEASIBLE, THEN A TRENCHING METHOD AS SHOWN IN THE DETAILS MAY BE USED.
9. NEW TRAFFIC SIGNAL POLES SHALL BE ROUND TAPERED, BLACK POWDER COATED. NEW TRAFFIC SIGNAL MAST ARMS SHALL BE CURVED, BLACK POWDER COATED. BACKPLATES SHALL BE SUPPLIED FOR ALL NEW SIGNAL HEADS.
10. NEW FOUNDATION FOR ALL NEW OR RELOCATED POLES SHALL BE EXTENDED IF NECESSARY TO ACCOMMODATE THE REQUIREMENTS FOR SIGNAL HEAD CLEARANCE ABOVE ROADWAY ONLY AT LOCATIONS WHERE THE GROUND ELEVATION AT THE POLE IS BELOW THE ELEVATION OF THE ROADWAY (SEE NOTES ON SPECIAL DETAILS). PAYMENT WILL BE INCLUDED IN SECTION 714, AHTD STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION.
11. ALL NEW BOXES SHALL BE (TYPE 2 HD) UNLESS OTHERWISE INDICATED. ALL NEW CONDUIT SHALL BE 3" NMC DIAMETER UNLESS SPECIFIED ON PLANS.
12. CONTRACTOR SHALL LOCATE ALL EXISTING UTILITIES AND NOTIFY OWNERS BEFORE BEGINNING WORK ON THIS PROJECT.
13. HARDWARE INPUTS MAY BE DETERMINED BY SUPPLIER. EACH DETECTOR OUTPUT SHALL INPUT THE CONTROLLER THROUGH A SEPARATE INPUT UNLESS OTHERWISE NOTED AND BE PROGRAMMED TO ACTUATE THE ASSOCIATED PHASE. COMBINATION (COMB.) DETECTORS SHALL ALSO BE PROGRAMMED TO PROVIDE VEHICLE COUNT/OCCUPANCY DATA.
14. TO DETERMINE UTILITY CLEARANCES ABOVE THE TRAFFIC SIGNAL POLE, REFER TO THE POLE SCHEDULE FOR VERTICAL SHAFT HEIGHT. WHERE THE POLE SCHEDULE INDICATES A TRAFFIC SIGNAL POLE WITHOUT A LUMINAIRE ARM, A HEIGHT OF 21' SHOULD BE USED TO DETERMINE UTILITY CLEARANCE ABOVE THE TRAFFIC SIGNAL MAST ARM. AN ADDITIONAL 6' SHOULD BE USED DIRECTLY ABOVE "VIDEO DETECTOR" AT LOCATIONS SHOWN ON THE SIGNAL PLANS.
15. THE DESIRABLE MINIMUM DISTANCE FROM THE FACE OF ROADWAY CURB OR SHOULDER EDGE TO THE FACE OF NON-BREAKAWAY POLE OR OBSTRUCTION IS 4'. REFER TO TRAFFIC SIGNAL PLANS FOR SPECIFIC LOCATION OF POLES, CONTROLLER AND ANY OTHER NON-BREAKAWAY OBSTRUCTIONS. REFER TO "DESIGN PARAMETERS, MINIMUM CLEAR ZONE DISTANCE" FOR MINIMUM DISTANCE FROM THE EDGE OF TRAVELED WAY TO THE FACE OF A NON-BREAKAWAY POLE OR OBSTRUCTION. TRAFFIC SIGNAL POLES OR ANY OTHER NON-BREAKAWAY OBSTRUCTION SHALL NOT BE INSTALLED WITHIN THE CLEAR ZONE.
16. AS DETERMINED BY THE ENGINEER, FOUNDATION EMBEDMENT MAY BE DECREASED BY A MAXIMUM OF TWO FEET IF COMPETENT ROCK IS ENCOUNTERED PRIOR TO ACHIEVING PLAN EMBEDMENT AND AT LEAST HALF OF THE REMAINING PLAN EMBEDMENT LENGTH IS KEYED INTO COMPETENT ROCK.
17. TERMINAL TRIPS SHALL BE PROVIDED FOR EACH NEW TRAFFIC SIGNAL POLE PER ITEM 714-TRAFFIC SIGNAL MAST ARM AND POLE WITH FOUNDATION.
18. CONTROLLER CABINET LAYOUT AND ORIENTATION SHALL CONFORM TO IMSA STANDARDS.
19. TRAFFIC SIGNAL CONTRACTOR MUST NOTIFY AN ENGINEER OR ASSIGNED CITY PROJECT INSPECTOR EACH DAY PRIOR TO SIGNAL RELATED WORK. NO WORK ON TRAFFIC SIGNALS WILL BE ALLOWED OR APPROVED WITHOUT THIS PRIOR NOTIFICATION.
20. P.E. CERTIFIED SHOP DRAWINGS FOR MAST ARMS AND POLES MUST BE SUBMITTED FOR APPROVAL. CERTIFICATION SHALL ALSO INDICATE COMPLIANCE WITH AHTD MATERIALS REQUIREMENTS AND CONFORMANCE TO AASHTO DESIGN REQUIREMENTS FOR 90 MPH WIND LOADING SIGNALS, MASTS AND SIGNS AS INDICATED.
21. ALL TRAFFIC SIGNAL POLES, MAST ARMS AND FOUNDATION DESIGNS SHALL CONFORM TO THE AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINARIES AND TRAFFIC SIGNALS, 4TH EDITION (2001) WITH 2003 AND 2006 INTERIMS, FOR 90 MPH WIND ZONE TO SUPPORT FIXED SIGNALS WITH ACTUAL AREAS AS CALLED FOR BY SIGNAL PLACEMENT AS SHOWN ON THESE PLANS.
22. TRAFFIC SIGNAL CONTROLLER SHALL BE COMPATIBLE WITH AND CONNECTED TO THE CITY'S EXISTING EAGLE/SIEMENS TACTICS COORDINATION SYSTEM.
23. CONTRACTOR SHALL FIELD VERIFY ALL POLE AND MAST ARM LOCATIONS WITH REGARD TO HORIZONTAL PLACEMENT FOR CLEARANCE FROM UTILITIES AND OTHER APPURTENANCES AND VERIFY VERTICAL CLEARANCE FOR POLE SHAFT AND MAST ARM FOR ABSENCE OF CONFLICT WITH OVERHEAD UTILITIES AND OTHER APPURTENANCES. CONTRACTOR SHALL OBTAIN APPROVAL OF PERMITTING JURISDICTIONS PRIOR TO ORDERING POLES AND MAST ARMS. IF DEVIATION FROM THIS PLAN IS NECESSARY, ENGINEER SHALL BE NOTIFIED AND FINAL REVISED LOCATIONS OF POLES AND MAST ARMS SHALL BE DOCUMENTED.

**PEDESTRIAN HYBRID BEACON QUANTITIES**

ITEM NO.	ITEM	QUANTITY	UNIT
SP & 701	SYSTEM LOCAL CONTROLLER TS 2-TYPE 2 (4 PHASES)	1	EACH
SP & 706	TRAFFIC SIGNAL HEAD, LED (3 SECTION, 1 WAY)	4	EACH
SP & 707	COUNTDOWN PEDESTRIAN SIGNAL HEAD, LED	2	EACH
708	TRAFFIC SIGNAL CABLE (5C/14 A.W.G.)	200	L.F.
708	TRAFFIC SIGNAL CABLE (20C/14 A.W.G.)	250	L.F.
710	NON-METALLIC CONDUIT (1.25")	100	L.F.
710	NON-METALLIC CONDUIT (3")	300	L.F.
710	NON-METALLIC CONDUIT (3" BORED)	300	L.F.
SP & 711	CONCRETE PULL BOX (TYPE 2 HD)	6	EACH
SP & 714	TRAFFIC SIGNAL MAST ARM (22') AND POLE (36') WITH FOUNDATION	1	EACH
SP & 714	TRAFFIC SIGNAL MAST ARM (22') AND POLE (21') WITH FOUNDATION	1	EACH
733	VIDEO CABLE	250	L.F.
SP & 733	VIDEO DETECTOR (CLR)	1	EACH
SP & 733	VIDEO DETECTOR (PTZ)	2	EACH
SP & 733	VIDEO PROCESSOR UNIT, EDGE CARD (2 CAMERA)	1	EACH
SP	SERVICE PEDESTAL	1	EACH
SP	LUMINAIRE ASSEMBLY*	1	EACH
SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (2C/6 A.W.G)	100	L.F.
SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (1C/8 A.W.G., ECG)	300	L.F.
SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (1C/12 A.W.G., EDG)	100	L.F.
SP	ELECTRICAL CONDUCTORS-IN-CONDUIT (2C/12 A.W.G., EDG)	250	L.F.
SP	ELECTRICAL CONDUCTORS FOR LUMINAIRES	250	L.F.
SP	SERVICE PEDESTAL	1	EACH






 CITY OF CONWAY, ARKANSAS  
STREET & ENGINEERING DEPARTMENT  
100 EAST RONBINS  
CONWAY, ARKANSAS 72034  
501-450-6165

CONWAY SRTS 1 (2011)  
AHTD JOB #080456  
CONWAY, ARKANSAS

PEDESTRIAN HYBRID BEACON  
NOTES & QUANTITIES

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV	SHEET  4
CHECKED BY: EJP	
DATE: 6/2/16	
SCALE: N.T.S.	

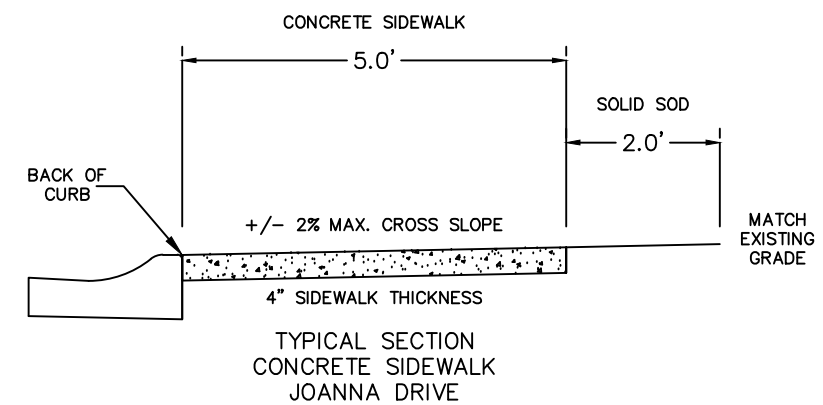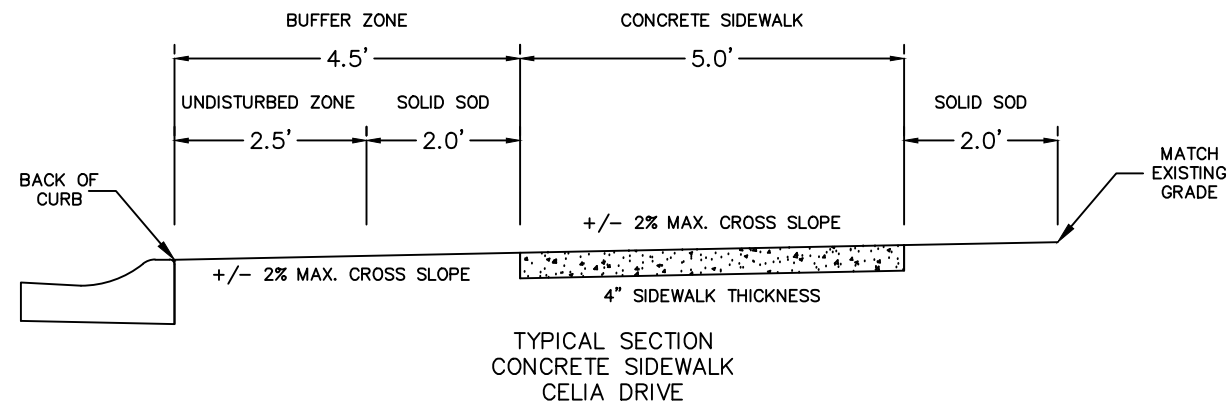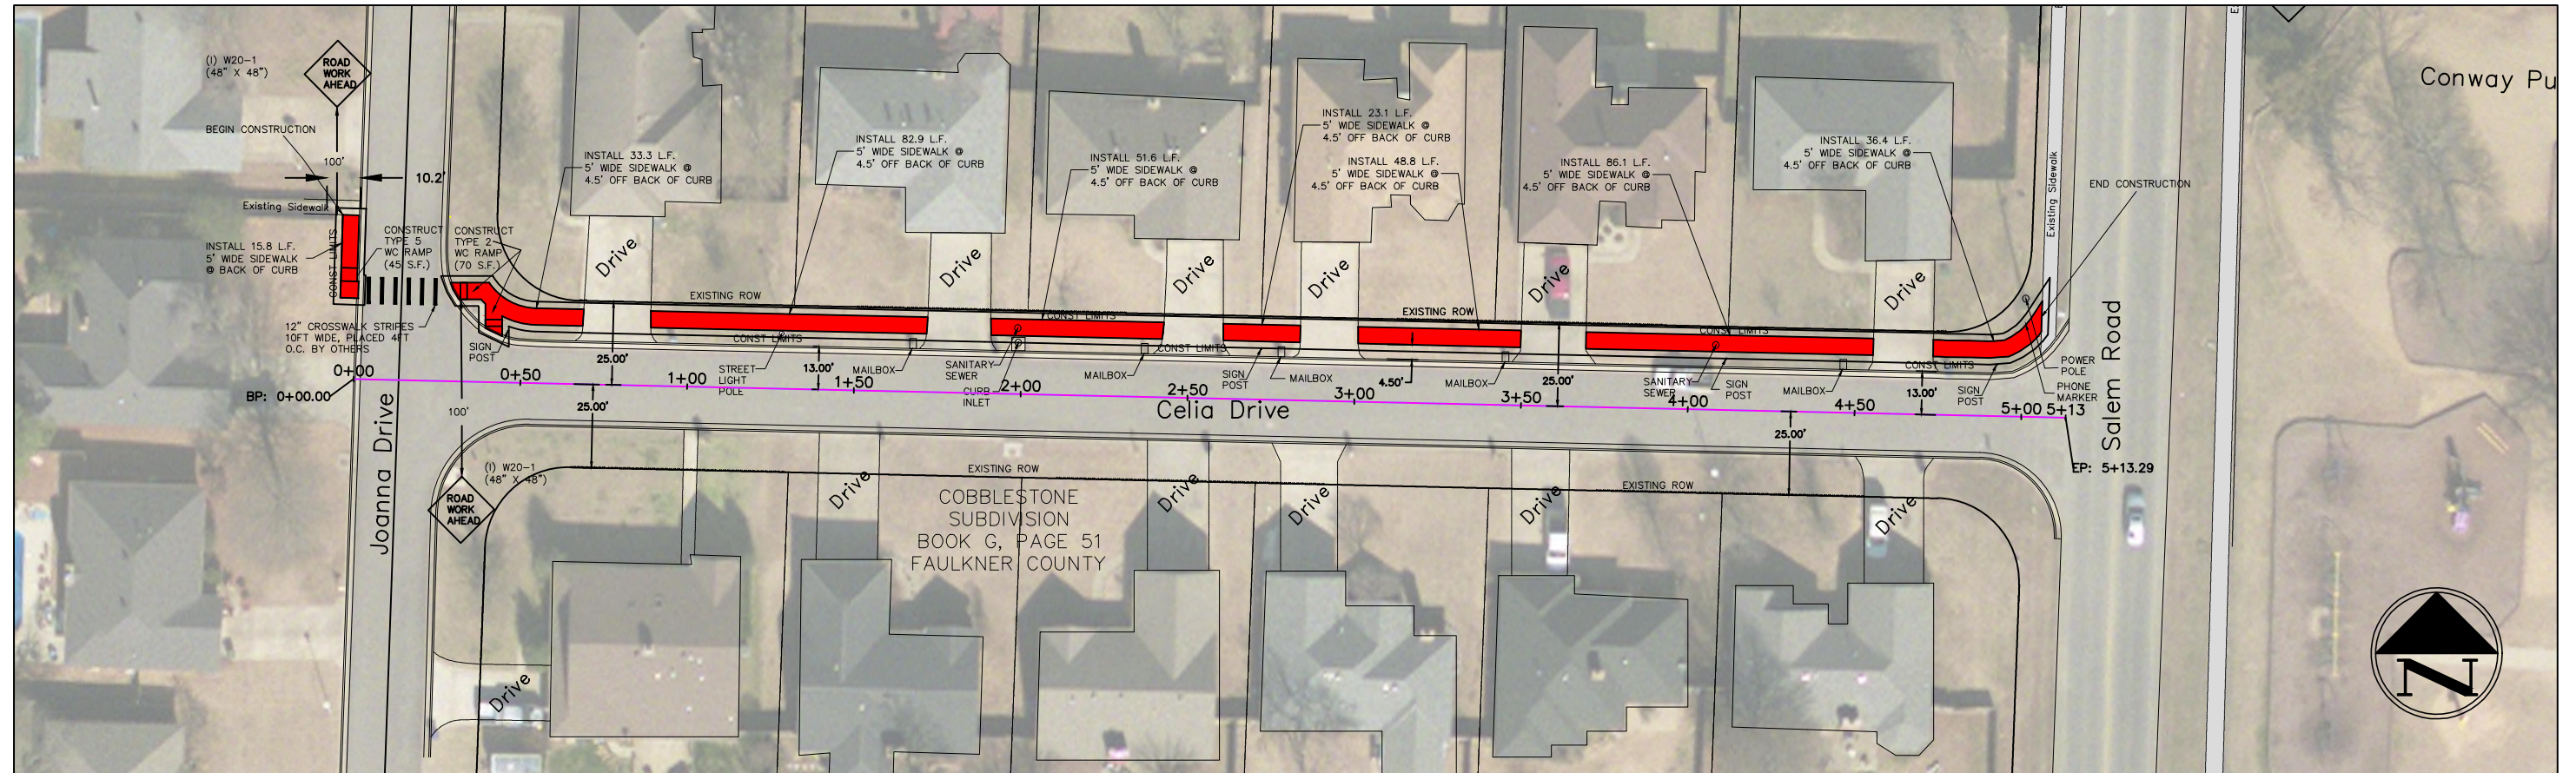

CITY OF CONWAY, ARKANSAS  
STREET & ENGINEERING DEPARTMENT  
100 EAST RONBINS  
CONWAY, ARKANSAS 72034  
501-450-6165



CONWAY SRTS 1 (2011)  
AHTD JOB #080456  
CONWAY, ARKANSAS

SITE #1  
CELIA DRIVE  
SIDEWALK IMPROVEMENTS

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV  
CHECKED BY: EJP  
DATE: 6/2/16  
SCALE: 1"=50'

SHEET  
5

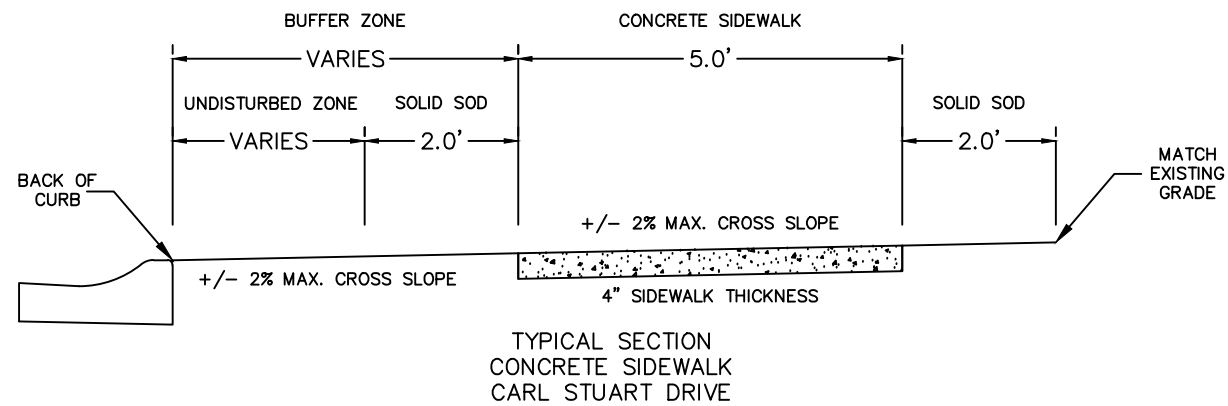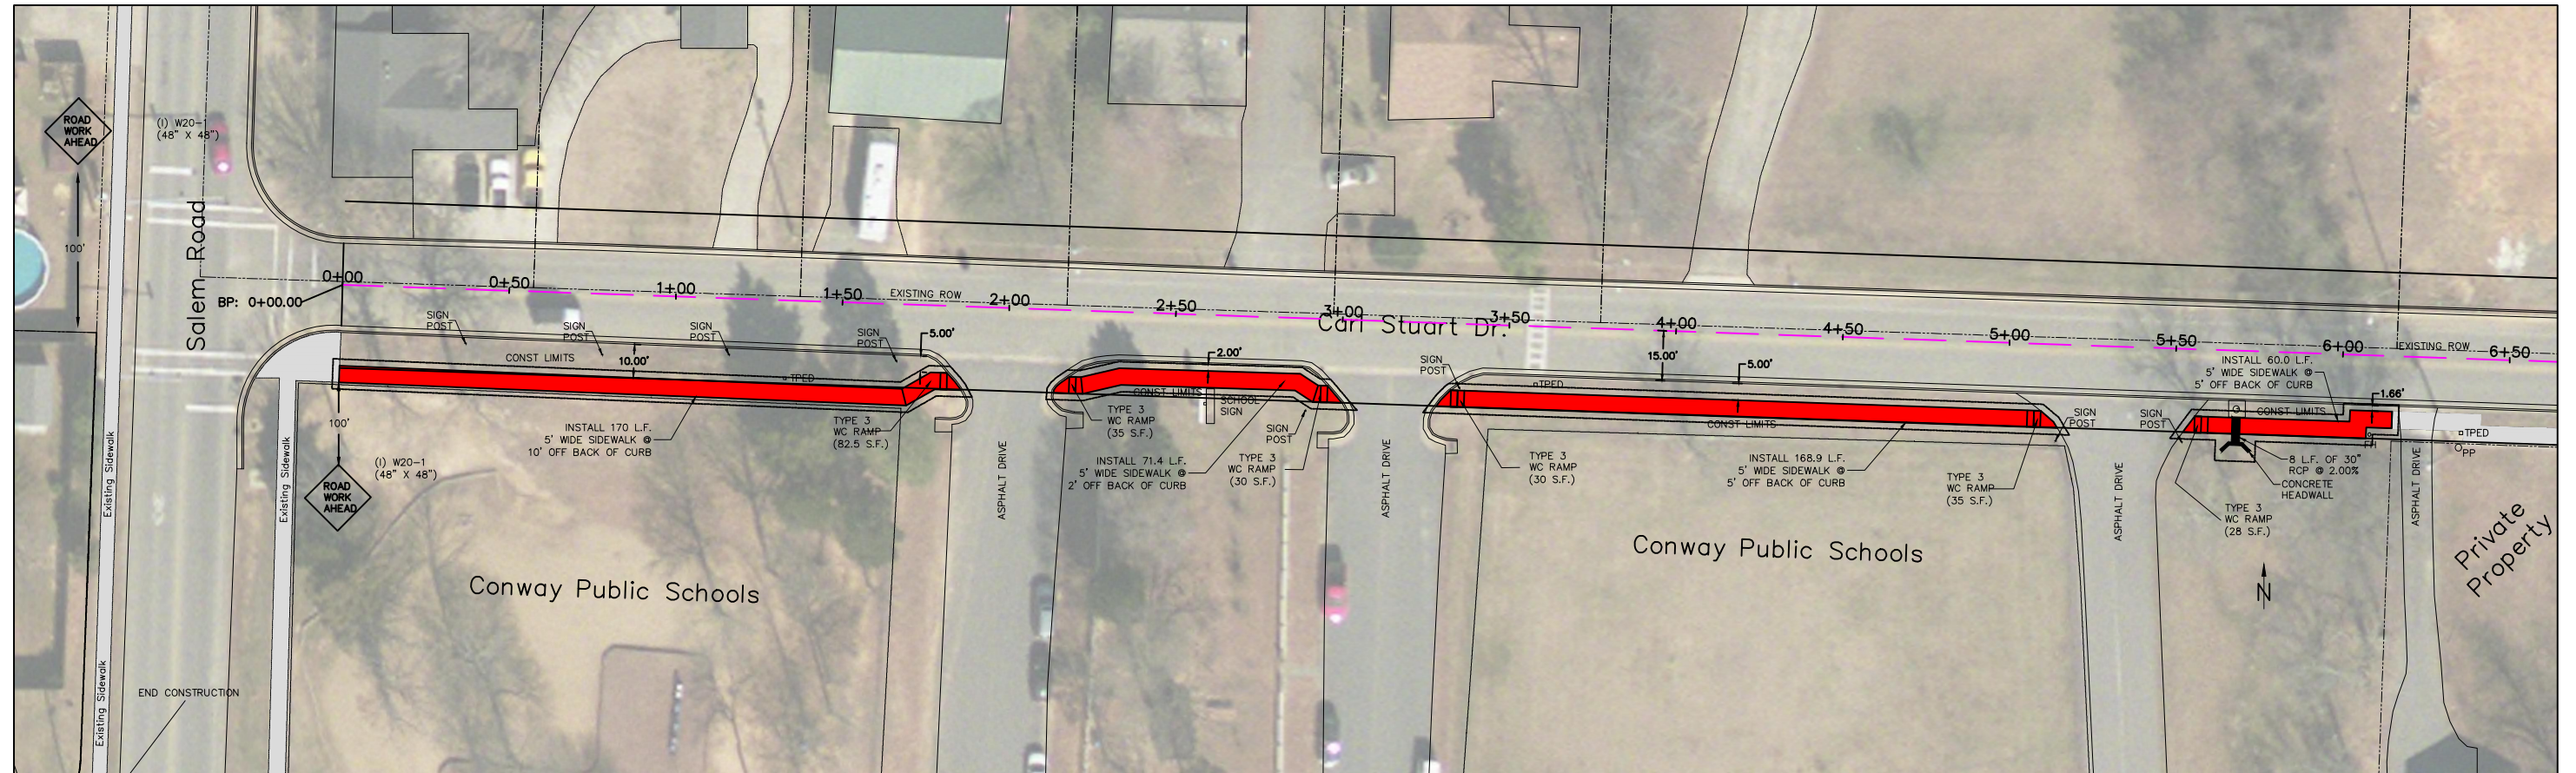

CITY OF CONWAY, ARKANSAS  
 STREET & ENGINEERING DEPARTMENT  
 100 EAST RONBINS  
 CONWAY, ARKANSAS 72034  
 501-450-6165



CONWAY SRTS 1 (2011)  
 AHTD JOB #080456  
 CONWAY, ARKANSAS

SITE #2  
 CARL STUART DRIVE  
 SIDEWALK IMPROVEMENTS

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV  
 CHECKED BY: EJP  
 DATE: 6/2/16  
 SCALE: 1"=50'

SHEET  
 6

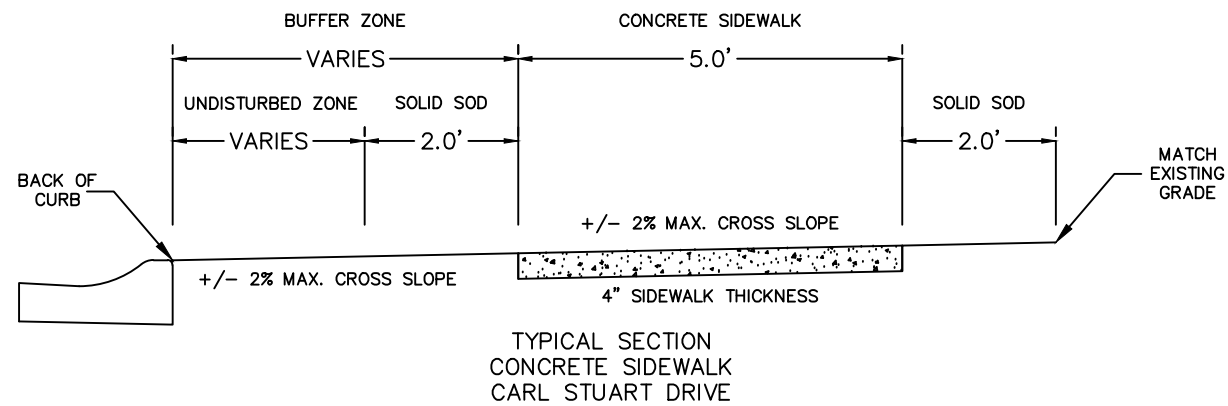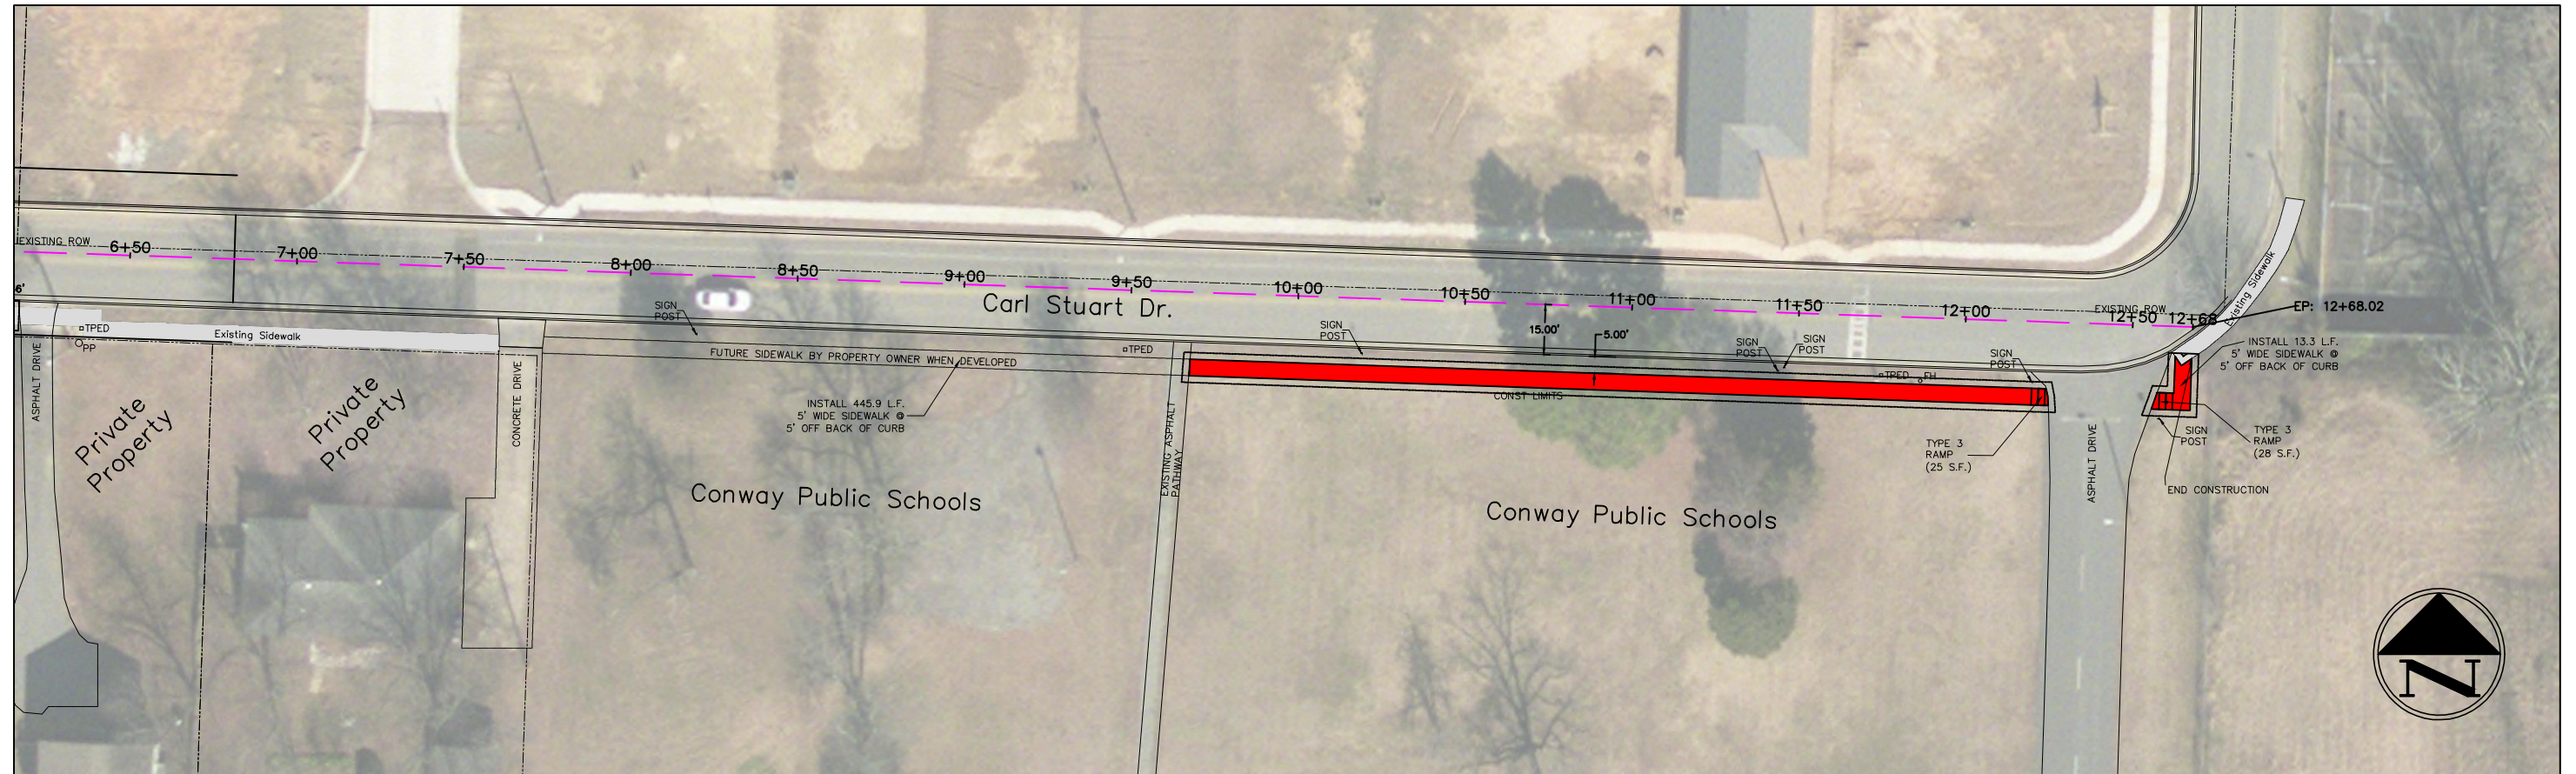

CITY OF CONWAY, ARKANSAS  
 STREET & ENGINEERING DEPARTMENT  
 100 EAST RONBINS  
 CONWAY, ARKANSAS 72034  
 501-450-6165



CONWAY SRTS 1 (2011)  
 AHTD JOB #080456  
 CONWAY, ARKANSAS

SITE #2  
 CARL STUART DRIVE  
 SIDEWALK IMPROVEMENTS

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV  
 CHECKED BY: EJP  
 DATE: 6/2/16  
 SCALE: 1"=50'

SHEET  
 7

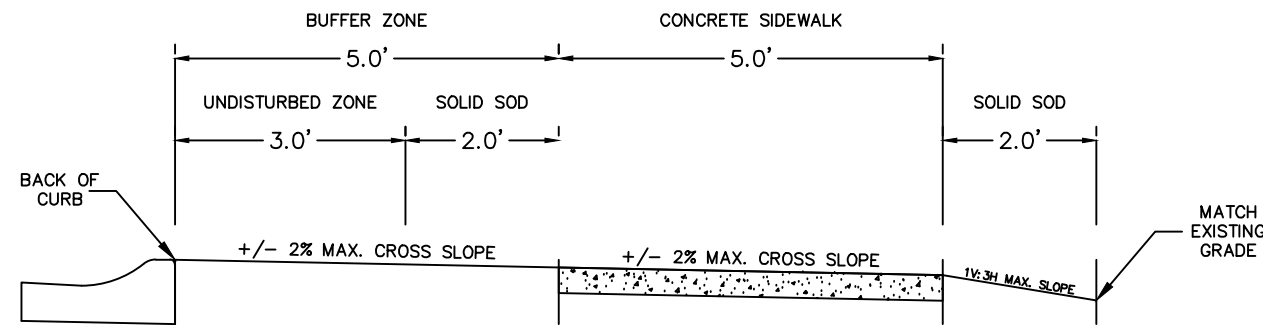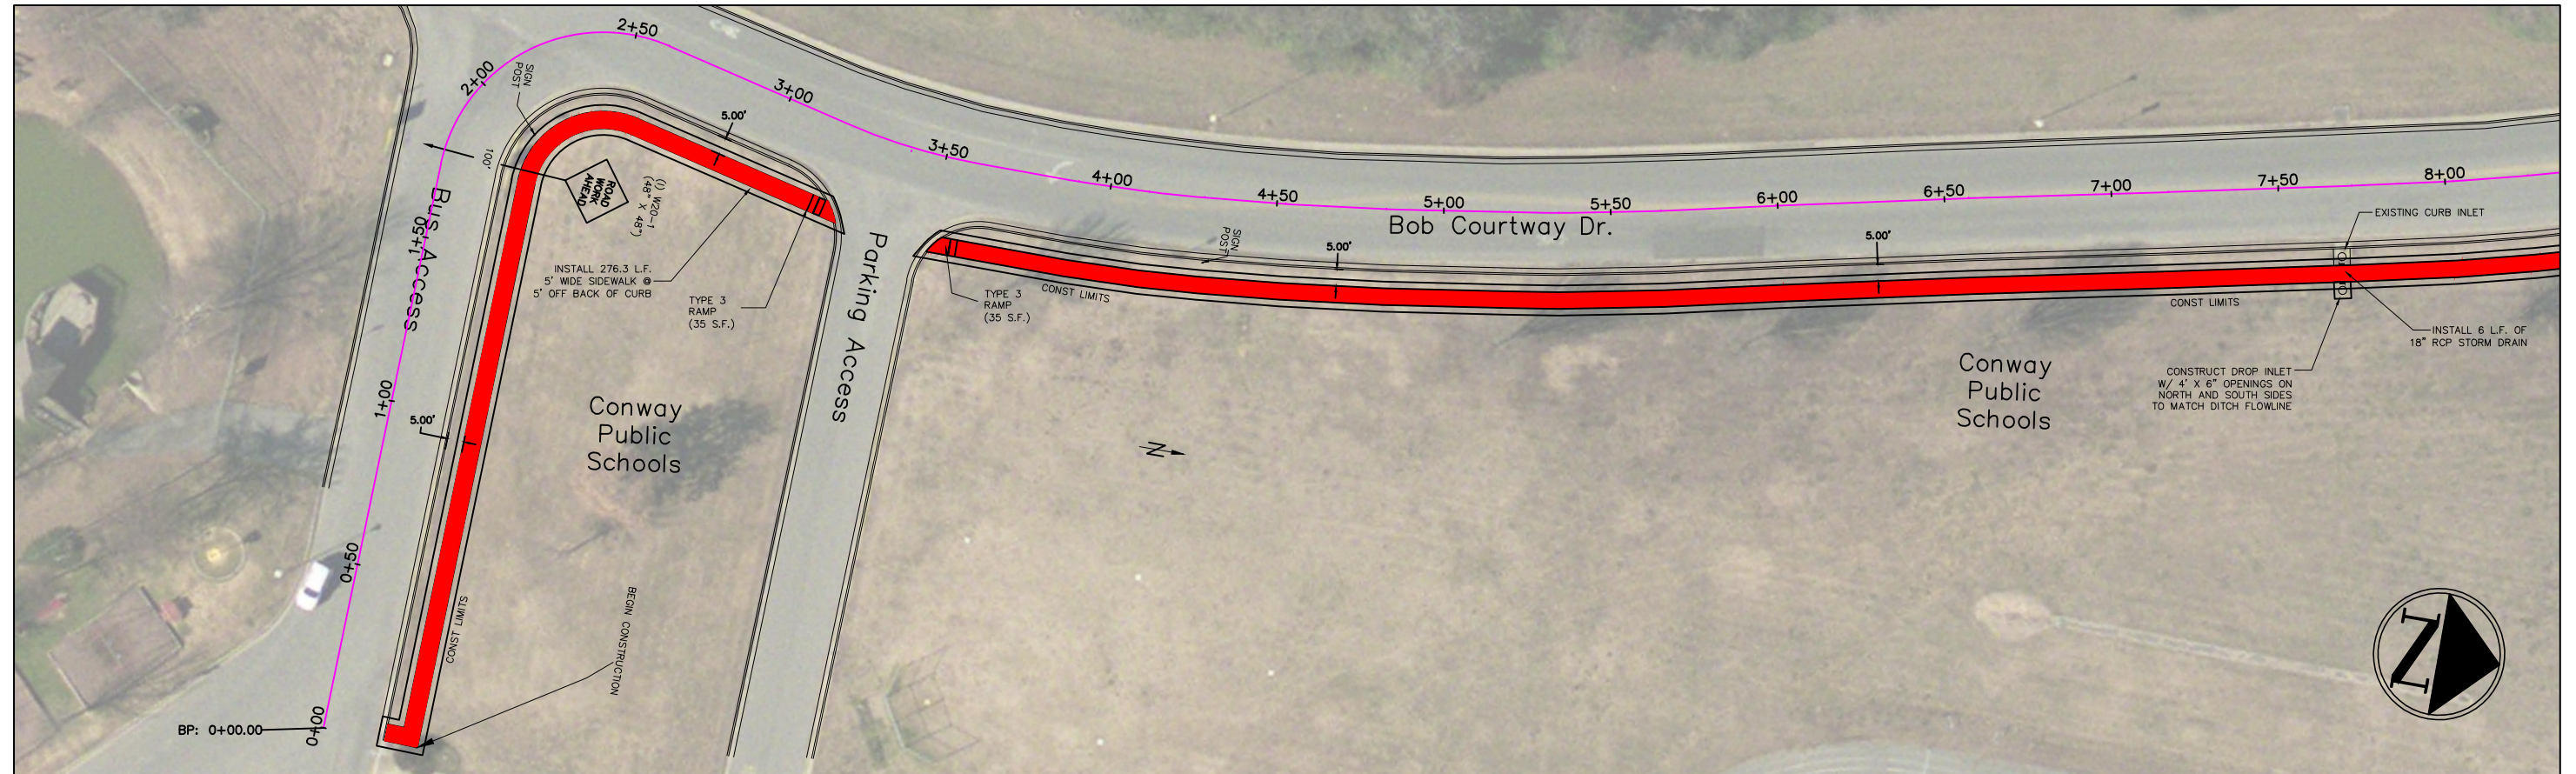

TYPICAL SECTION  
CONCRETE SIDEWALK  
BOB COURTWAY DRIVE



CITY OF CONWAY, ARKANSAS  
STREET & ENGINEERING DEPARTMENT  
100 EAST RONBINS  
CONWAY, ARKANSAS 72034  
501-450-6165

CONWAY SRTS 1 (2011)  
AHTD JOB #080456  
CONWAY, ARKANSAS



SITE #3  
BOB COURTWAY DRIVE  
SIDEWALK IMPROVEMENTS

NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV  
CHECKED BY: EJP  
DATE: 6/2/16  
SCALE: 1"=50'

SHEET  
8



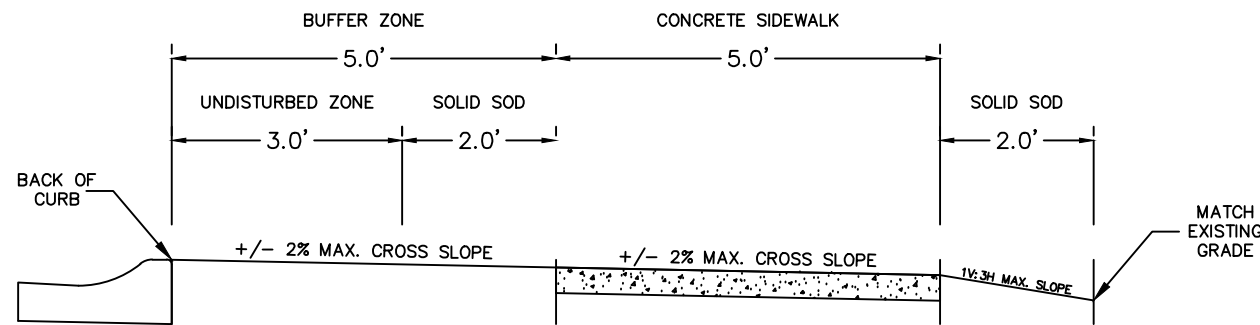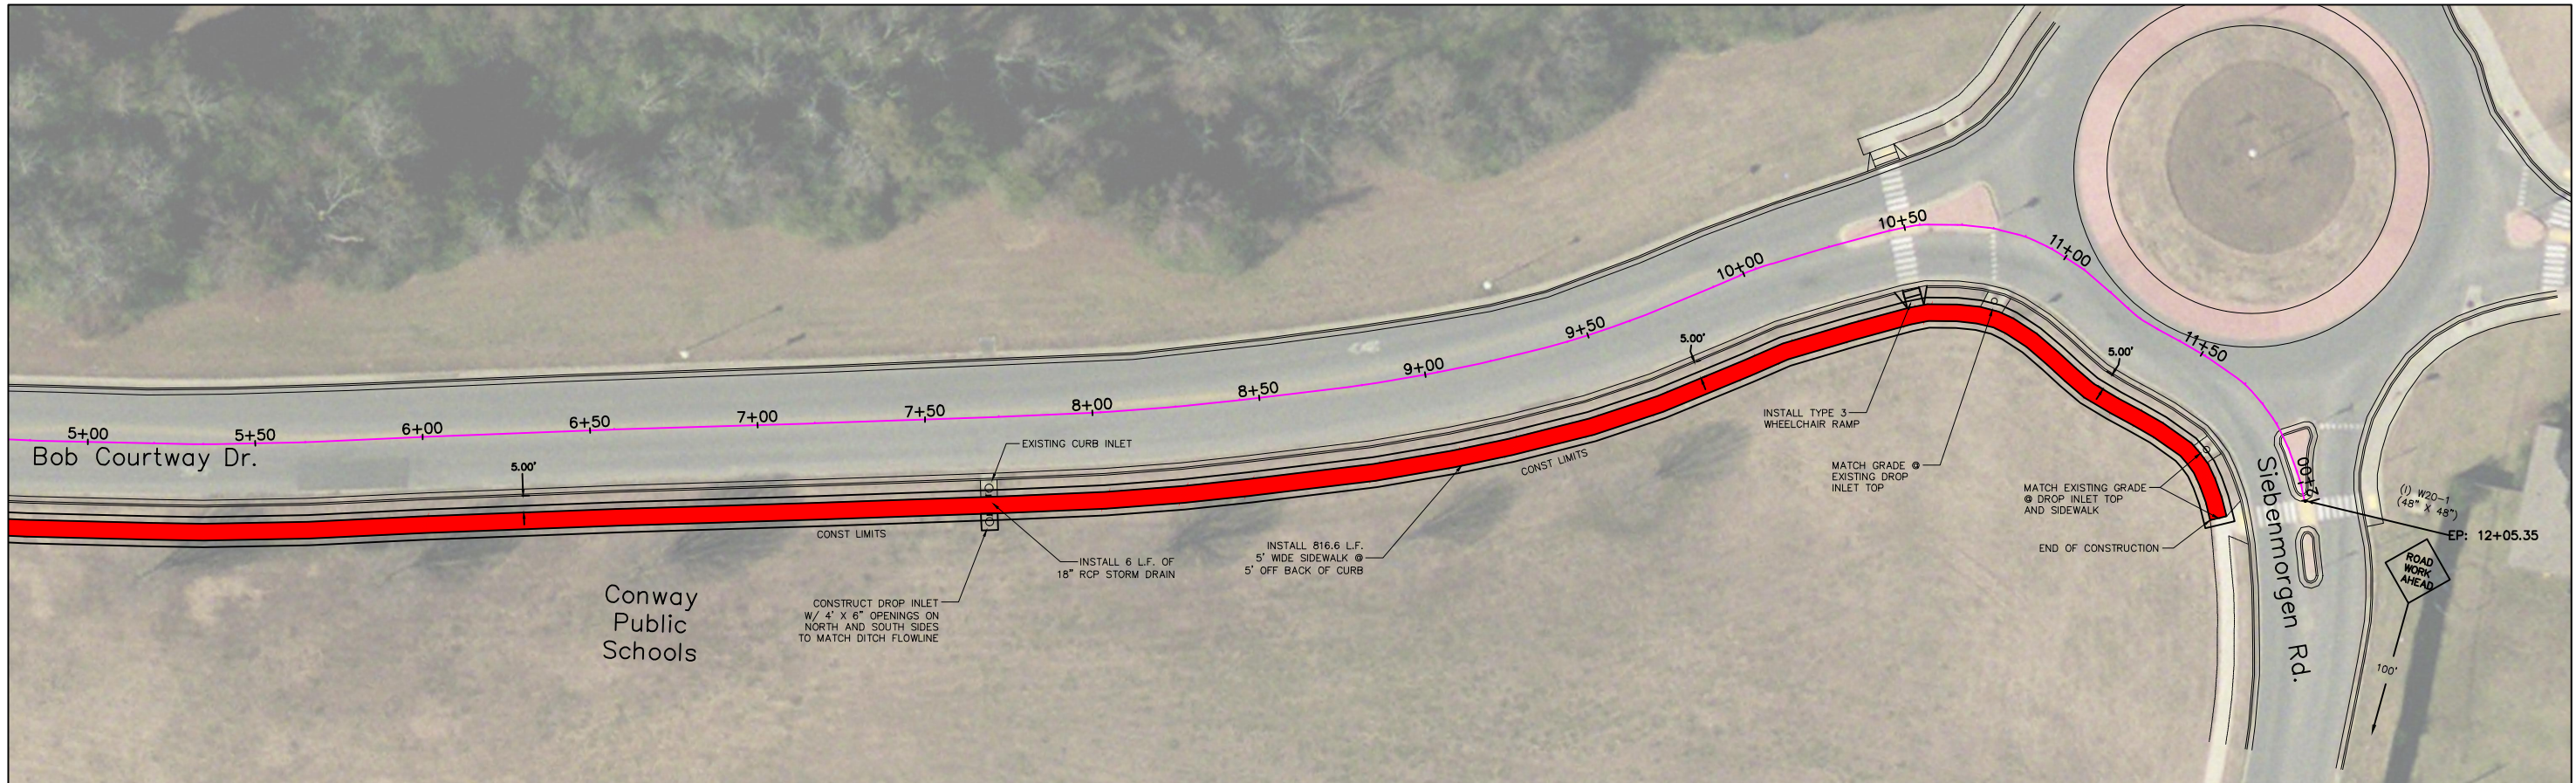

TYPICAL SECTION  
CONCRETE SIDEWALK  
BOB COURTWAY DRIVE



CITY OF CONWAY, ARKANSAS  
STREET & ENGINEERING DEPARTMENT  
100 EAST RONBINS  
CONWAY, ARKANSAS 72034  
501-450-6165

CONWAY SRTS 1 (2011)  
AHTD JOB #080456  
CONWAY, ARKANSAS

SITE #3  
BOB COURTWAY DRIVE  
SIDEWALK IMPROVEMENTS


NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV  
CHECKED BY: EJP  
DATE: 6/2/16  
SCALE: 1"=50'

SHEET

9

**SIGNAL FACES**




- NOTES:**
1. ALL NEW SIGNAL HEADS SHALL HAVE BACKPLATES.
  2. REFER TO SPECIAL PROVISIONS FOR DETAILS ON NEW REQUIREMENTS FOR PEDESTRIAN SIGNAL HEADS.
  3. ALL PEDESTRIAN SIGNAL HEADS CAN BE PLACED INTO OPERATION IF THERE ARE BOTH WHEELCHAIR RAMPS AND A CROSSWALK THAT MEET A.D.A. STANDARDS.

SIGNAL FACES	SALEM RD & TUCKER CREEK					FLASH SEQ.
	CLR.	CLR.	2	CLR.	4	
1,2,3,4	FY	SY	SR	FR	BLK	FY
4,5	DW	DW	W	FDW	DW	BLK

#	DETECTOR DESCRIPTION
VD1	PEDESTRIAN DETECTOR #1
VD2	PEDESTRIAN DETECTOR #2
VD3	PTZ CAMERA

**PHASING DIAGRAM**

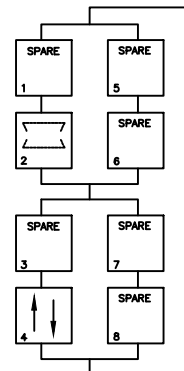

**POLE - MAST ARM SCHEDULE**

POLE	POLE FOUNDATION TYPE	MAST ARM LENGTH	POLE HEIGHT	MA DEGREES CW FROM HANDHOLE	STREETLIGHT ARM LENGTH	SL DEGREES CW FROM HANDHOLE	LATITUDE	LONGITUDE
A (New)	AHTD	22'	35'	180°	8'	90°	35.0817410	-92.4716746
B (New)	AHTD	22'	21'	180°	N/A	N/A	35.0816850	-92.4718939

**TRAFFIC SIGNAL LEGEND**



- NEW TRAFFIC SIGNAL CONTROLLER
- NEW JUNCTION BOX
- NEW 3" NON-METALLIC CONDUIT
- NEW 1.25" NON-METALLIC CONDUIT
- NEW OR RELOCATED METAL POLE
- NEW OR RELOCATED MAST ARM AND POLE
- SIGNAL HEAD AND NUMBER
- RELOCATED PEDESTRIAN SIGNAL HEAD AND NUMBER
- EXISTING COBRA HEAD STREET LIGHT
- TRAFFIC SIGNAL POLE W/ PED PUSH BUTTONS
- RELOCATED VIDEO DETECTOR
- BREAKER DISCONNECT BOX
- POLE NUMBER 'n'

**DESIGN PARAMETERS**  
 POSTED SPEED LIMIT:  
 35 MPH NORTHBOUND AND SOUTHBOUND APPROACHES  
 N/A FOR EASTBOUND AND WESTBOUND APPROACHES  
 NO RAILROAD TRACKS  
 NO PARKING  
 NO FIRE STATION  
 4' CLEAR ZONE (FROM EDGE OF ASPHALT) ALONG SALEM ROAD

SIGNAGE AND STRIPING TO BE INSTALLED BY THE CITY OF CONWAY.

SEQUENCE FOR PEDESTRIAN HYBRID BEACON TO CONFORM WITH FIGURE 4F-3 OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION

CONTRACTOR SHALL BE RESPONSIBLE FOR CONFIRMING LOCATION AND USABILITY OF EXISTING NMC.

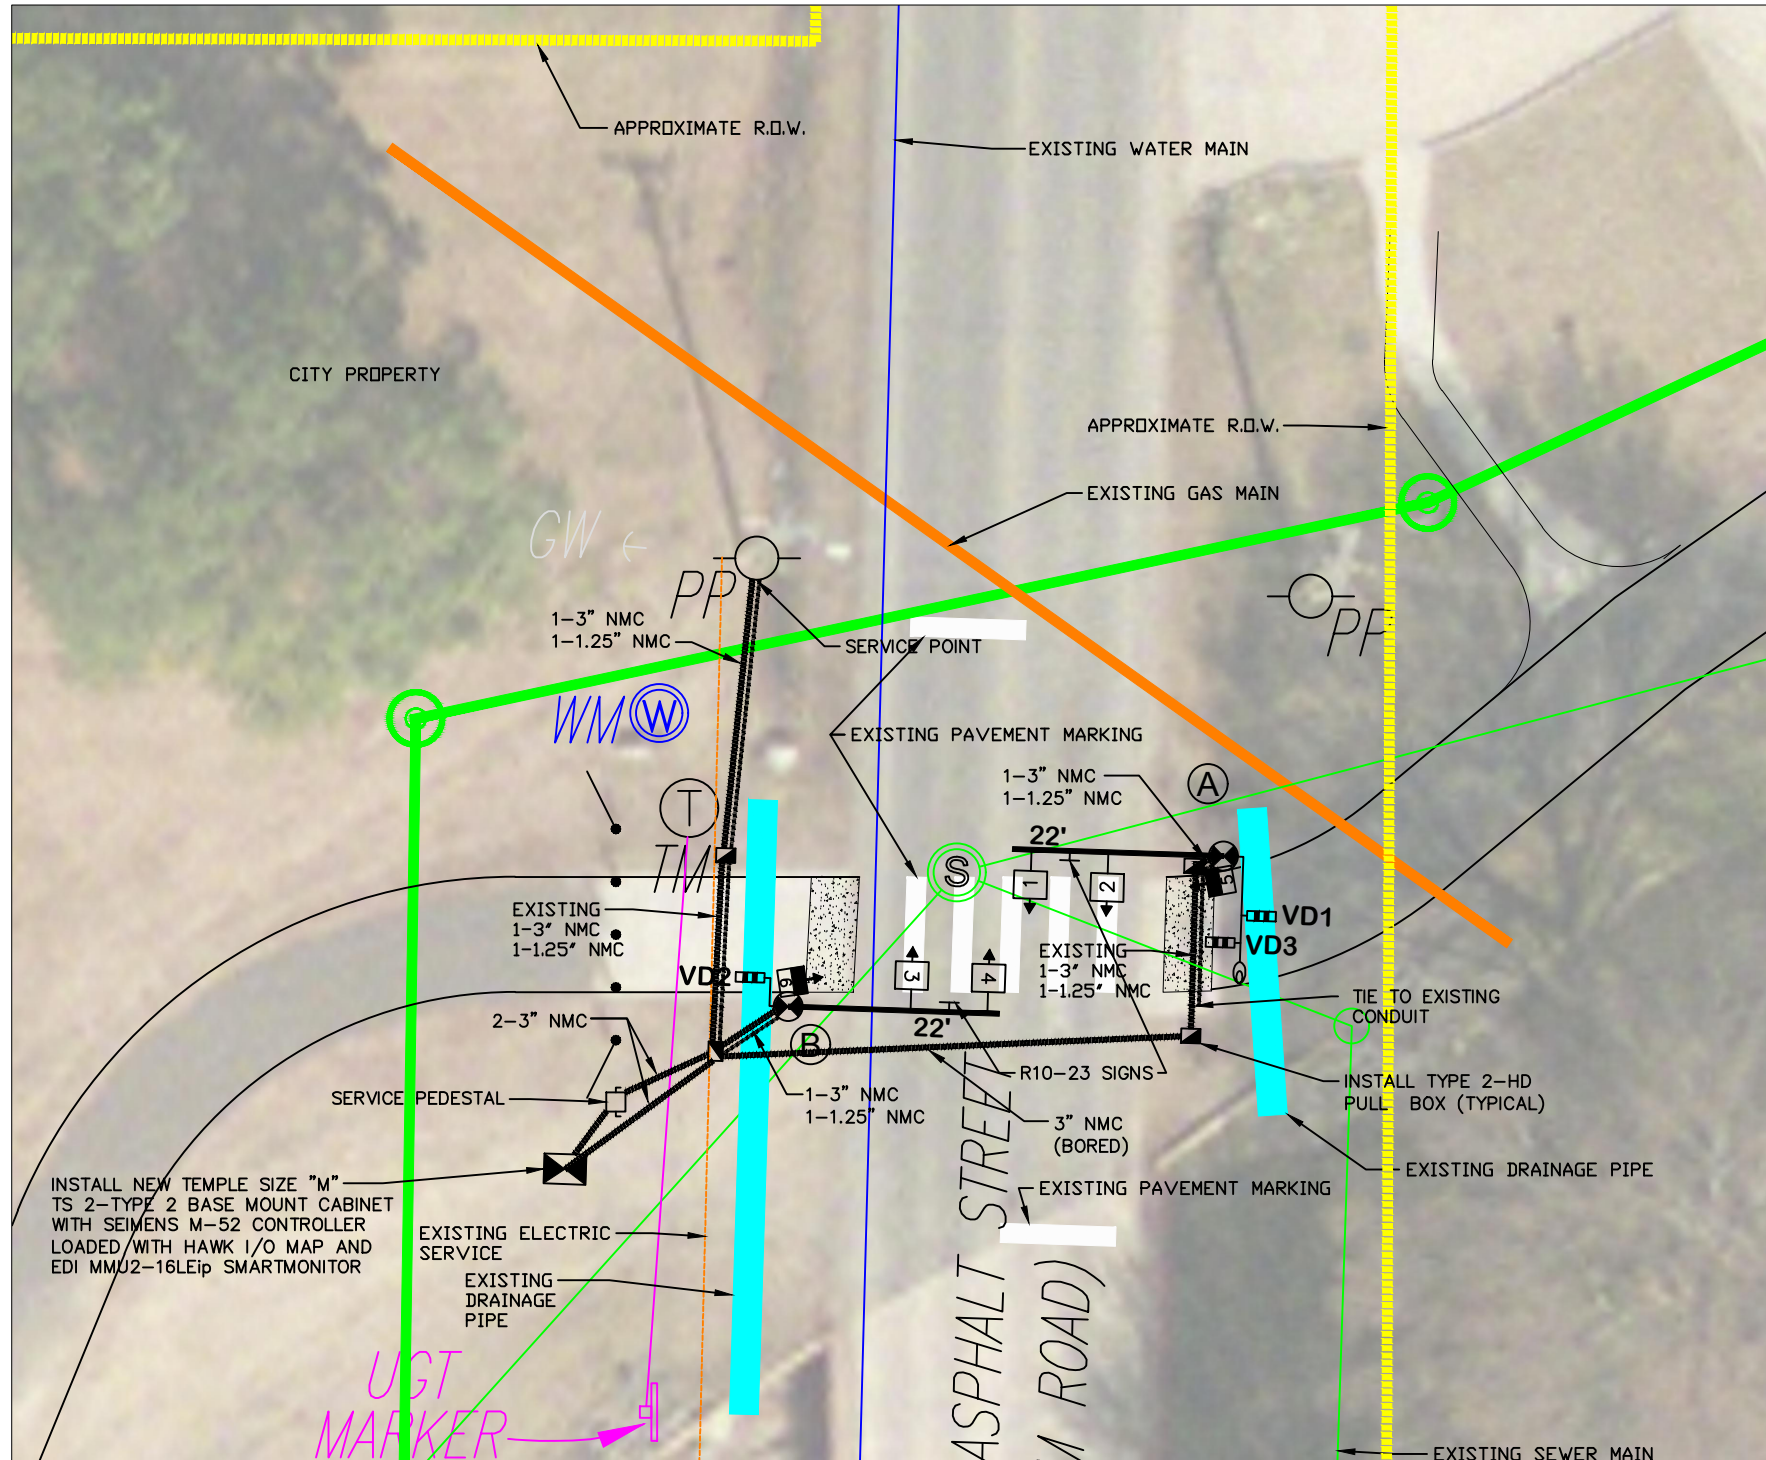

CITY OF CONWAY, ARKANSAS  
 STREET & ENGINEERING DEPARTMENT  
 100 EAST RONBINS  
 CONWAY, ARKANSAS 72034  
 501-450-6165

CONWAY SRTS 1 (2011)  
 AHTD JOB #080456  
 CONWAY, ARKANSAS

SITE #4  
 PEDESTRIAN HYBRID BEACON  
 SIGNAL PLAN


NO.	REVISION/ISSUE	DATE

DRAWN BY: BFV  
 CHECKED BY: EJP  
 DATE: 6/2/16  
 SCALE: 1"=20'

SHEET  
 10

**EQUIPMENT NOTES:**

1. ALL NEW TRAFFIC SIGNAL HEADS SHALL BE LED.
2. ALL CAMERA, CONTROLLER, AND COMMUNICATION EQUIPMENT INSTALLATIONS MUST BE MADE BY A FACTORY CERTIFIED INSTALLER, OR INSPECTED AND APPROVED BY THE RESPECTIVE MANUFACTURER, WITH A LETTER TO THE CITY BY THE FACTORY CERTIFYING THE SAME.
3. ALL NEW CABLING AND WIRING MUST BE TERMINATED BY AN IMSA CERTIFIED TECHNICIAN.

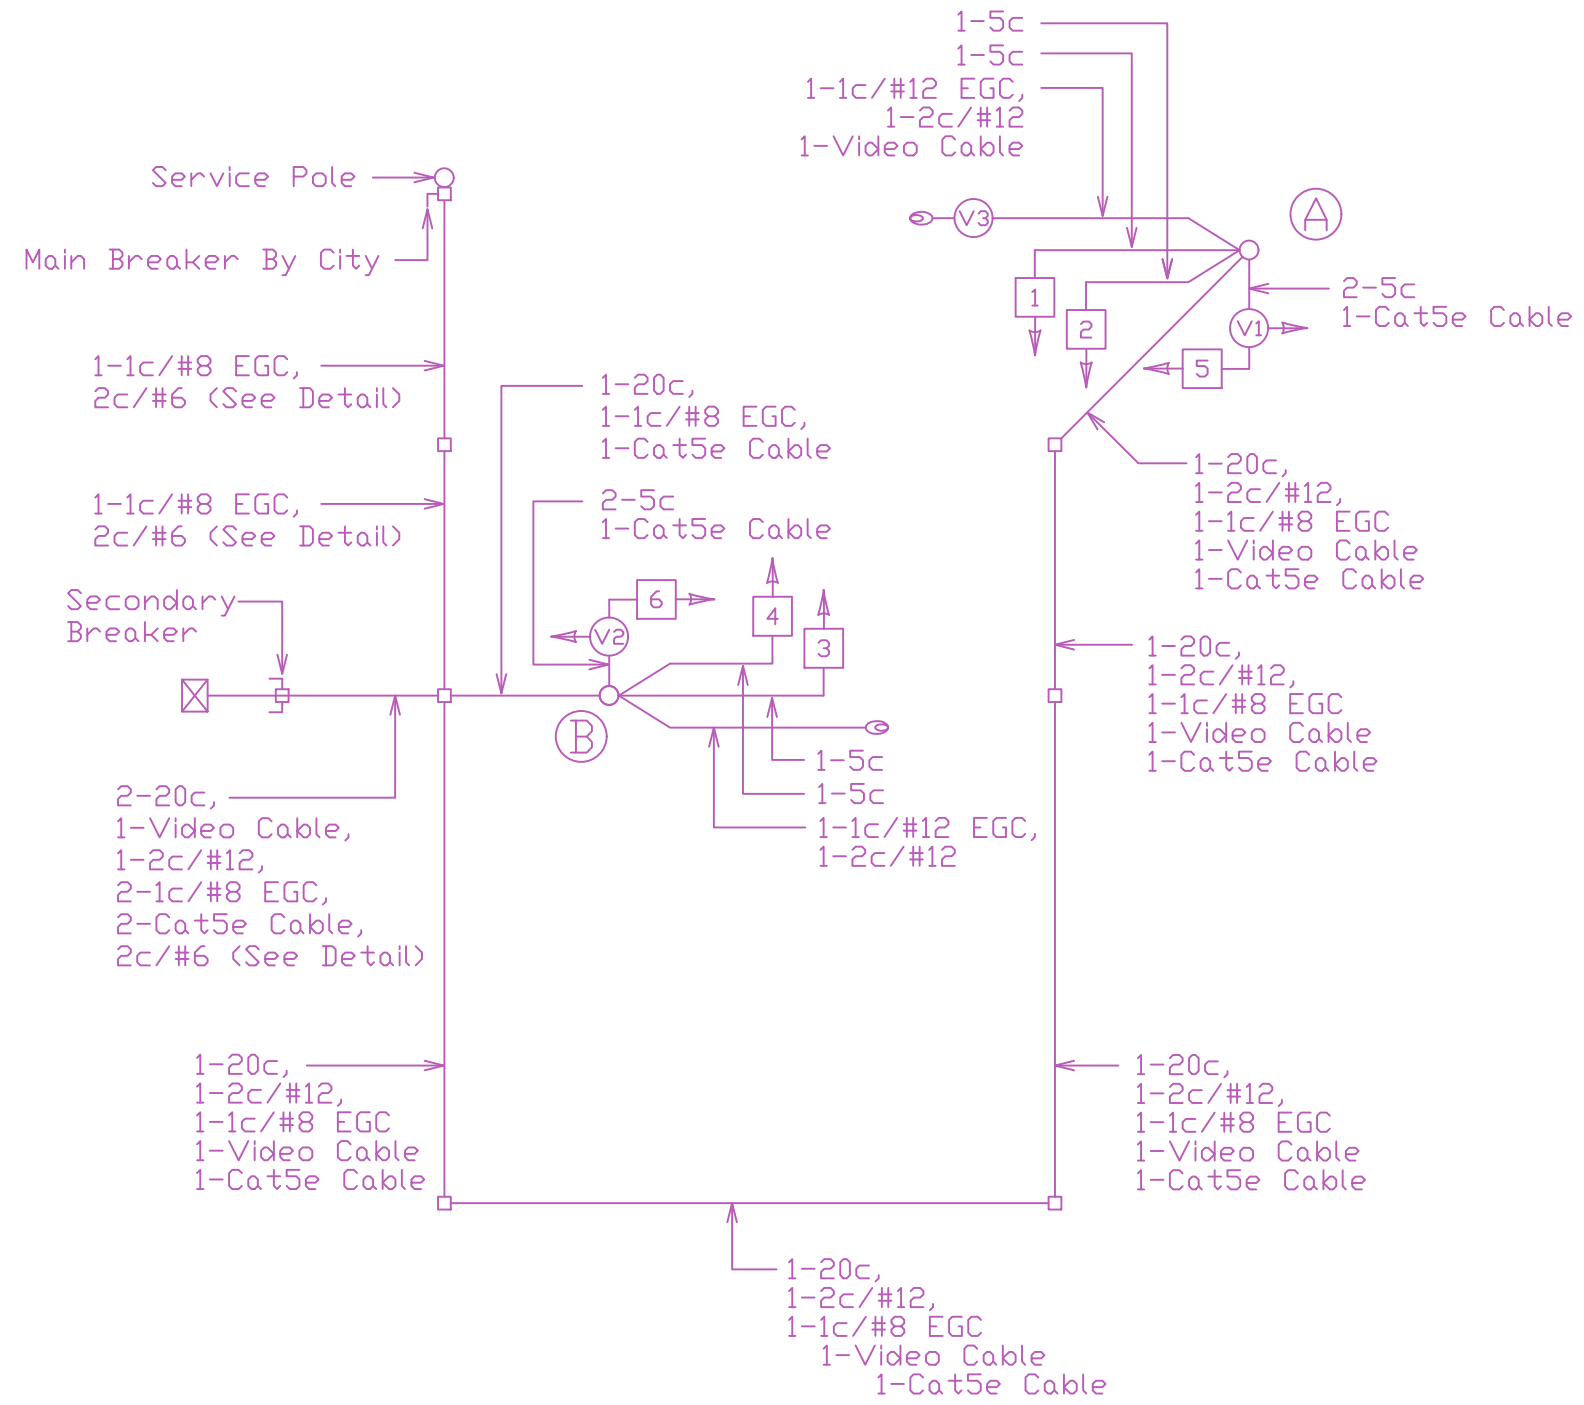



 CITY OF CONWAY, ARKANSAS  
 STREET & ENGINEERING DEPARTMENT  
 100 EAST RONBINS  
 CONWAY, ARKANSAS 72034  
 501-450-6165

CONWAY SRTS 1 (2011)  
 AHTD JOB #080456  
 CONWAY, ARKANSAS


SITE #4  
 PEDESTRIAN HYBRID BEACON  
 WIRING DIAGRAM

NO.	REVISION/ISSUE	DATE


DRAWN BY: BFV	SHEET  11
CHECKED BY: EJP	
DATE: 6/2/16	
SCALE: N.T.S.	

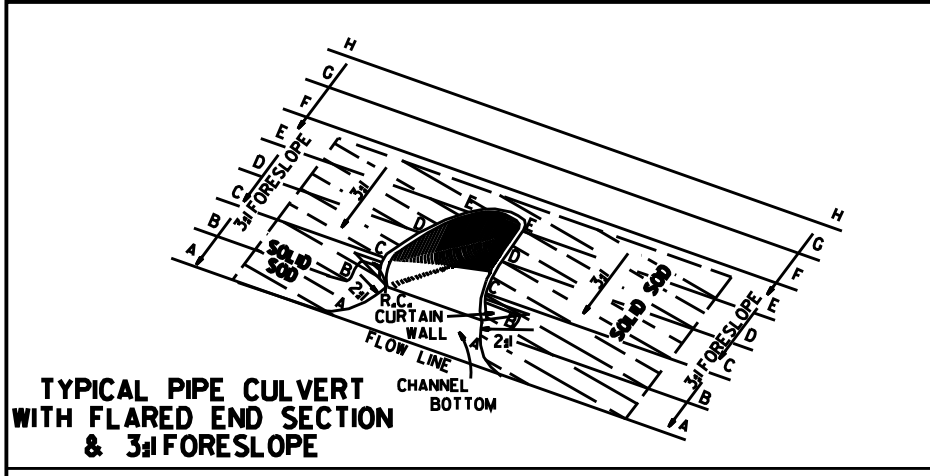


TYPICAL PIPE CULVERT WITH FLARED END SECTION & 3:1 FORESLOPE

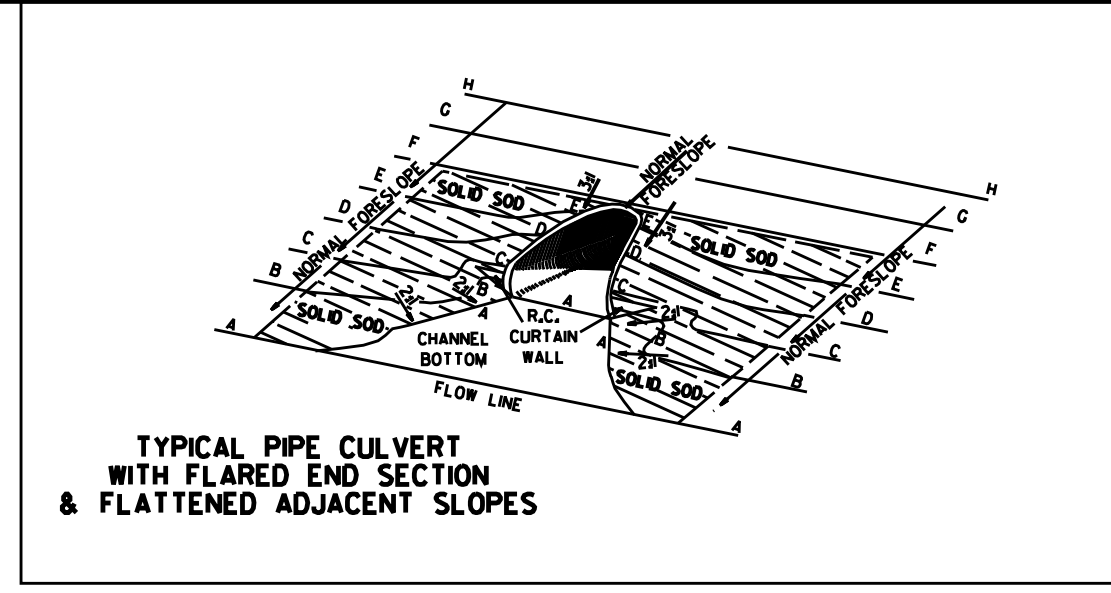

TYPICAL PIPE CULVERT WITH FLARED END SECTION & FLATTENED ADJACENT SLOPES

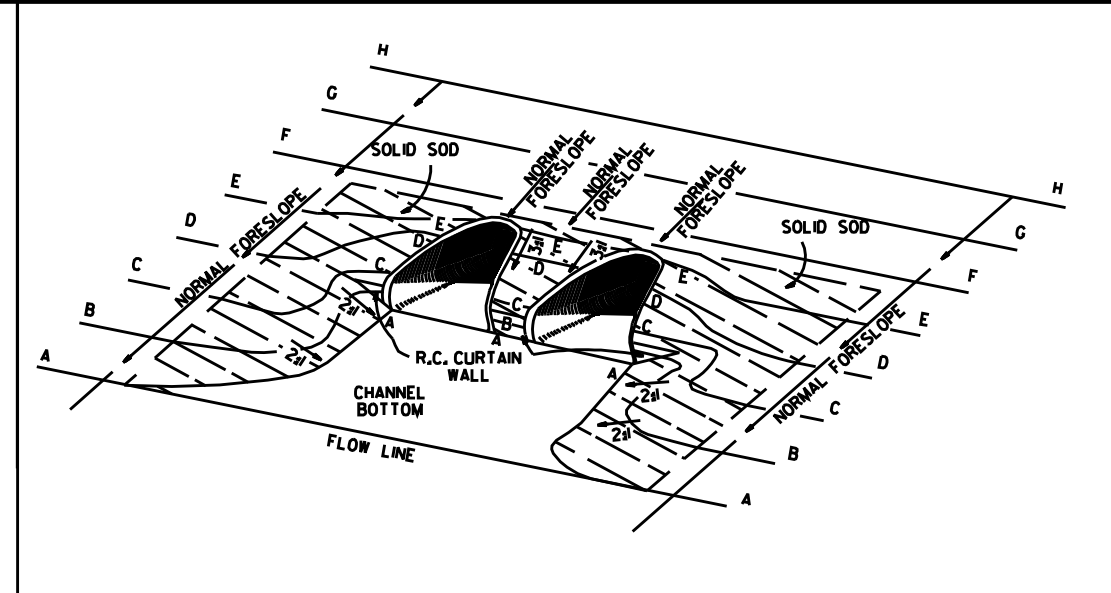

TYPICAL MULTIPLE PIPE CULVERT WITH FLARED END SECTIONS & FLATTENED ADJACENT SLOPES

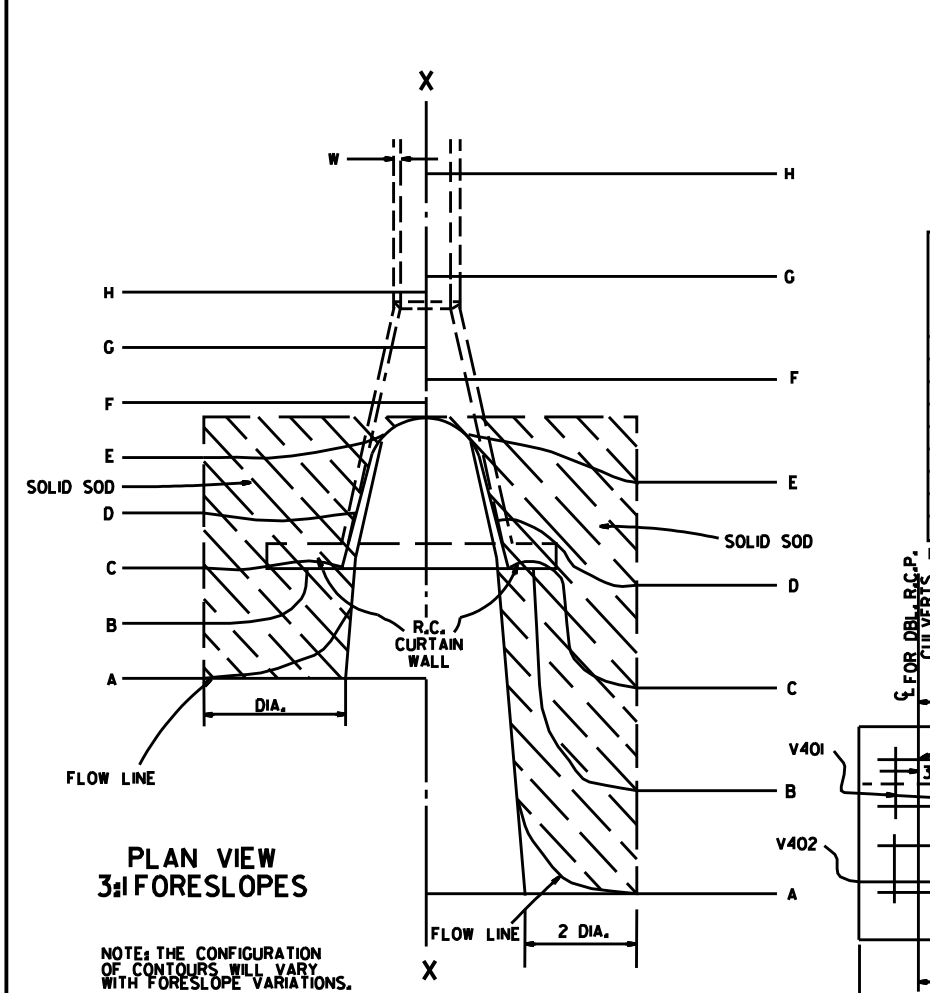

PLAN VIEW 3:1 FORESLOPES


PLAN VIEW FLATTENED FORESLOPES

NOTE: THE CONFIGURATION OF CONTOURS WILL VARY WITH FORESLOPE VARIATIONS.

R.C. CURTAIN WALL DIMENSIONS & QUANTITIES


PIPE DIA.	H <sub>1</sub>	L <sub>1</sub>	L	L (DBL.) / 2	SINGLE R.C.P.C.		DOUBLE R.C.P.C.	
					CONC.	REINF. STEEL	CONC.	REINF. STEEL
					CU. YDS.	LBS.	CU. YDS.	LBS.
18"	11 1/2"	3'-5"	8'-0"	6'-3"	0.31	27.7	0.45	39.5
24"	1'-0 1/2"	4'-6"	9'-6"	7'-6"	0.37	33.4	0.53	48.0
30"	1'-3 1/2"	5'-7"	11'-0"	9'-0"	0.45	39.0	0.67	59.0
36"	1'-7"	6'-8"	13'-0"	10'-6"	0.58	52.6	0.83	73.9
42"	2'-1 1/2"	7'-3"	15'-6"	12'-0"	0.82	77.1	1.10	100.7
48"	2'-5"	7'-10"	17'-0"	13'-0"	0.98	94.9	1.27	120.4
54"	2'-9 1/2"	8'-5"	18'-6"	14'-0"	1.16	115.8	1.47	143.7
60"	3'-4"	9'-0"	20'-6"	15'-6"	1.47	149.7	1.84	180.3
72"	4'-5"	10'-2"	25'-6"	18'-6"	2.31	232.6	2.73	271.0

NOTE: QUANTITIES SHOWN ARE FOR ONE (1) CURTAIN WALL.

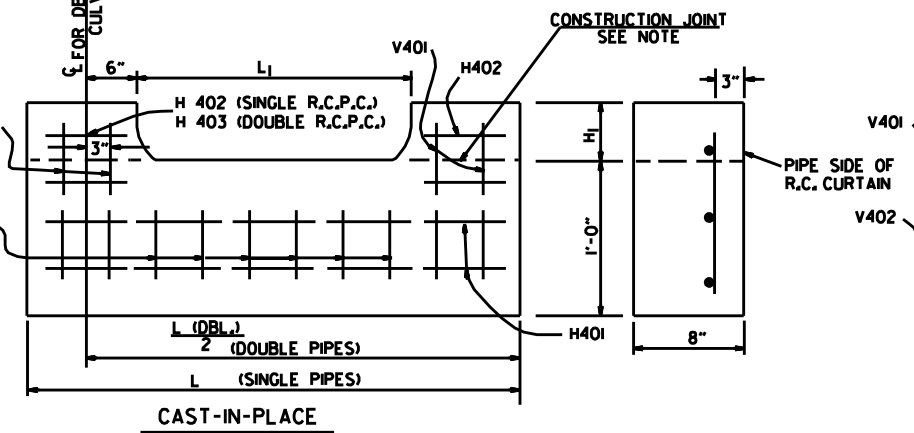

R.C. CURTAIN WALL DETAILS

NOTE: THE PORTION OF THE R.C. CURTAIN WALL BENEATH THE FLARED END SECTION (LOWER 1'-0") SHALL BE PLACED MONOLITHICALLY. THE FLARED END SECTION SHALL THEN BE SET IN PLACE & THE REMAINING PORTIONS OF THE R.C. CURTAIN WALL PLACED.

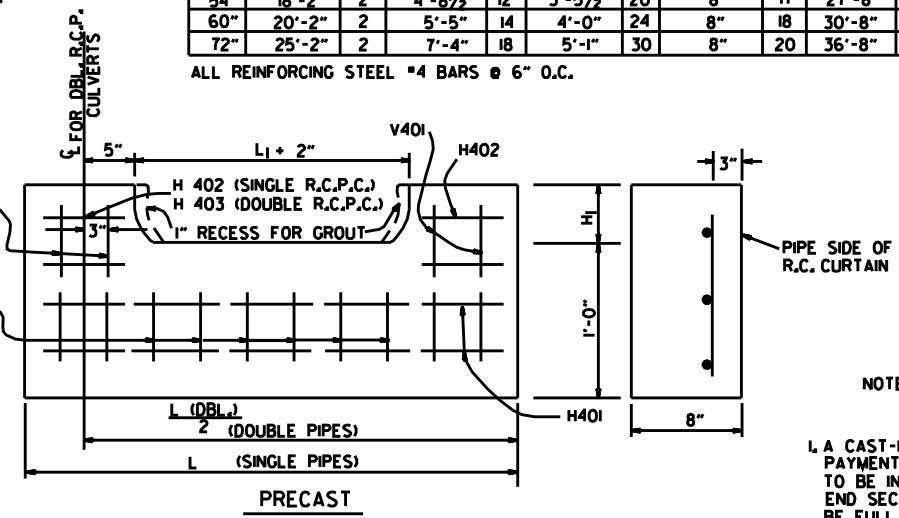

NOTE: THE PRECAST CURTAIN WALL WILL BE SET AND BACKFILLED WITH COMPACTED MATERIAL. THE FLARED END SECTION SHALL THEN BE SET IN PLACE AND THE 1" RECESS FILLED WITH GROUT. WHERE "L" EXCEEDS 11' THE CURTAIN WALL MAY BE CAST IN TWO (2) OR MORE SECTIONS. THE METHOD OF JOINING THE SECTIONS FOR INSTALLATION SHALL BE APPROVED BY THE ENGINEER.

REINFORCING STEEL SCHEDULE

PIPE DIA.	SINGLE R.C. PIPE CULVERT								DOUBLE R.C. PIPE CULVERT									
	H401		H402		V401		V402		H401		H402		H403		V401		V402	
	L	NO.	L	NO.	L	NO.	L	NO.	L	NO.	L	NO.	L	NO.	L	NO.	L	NO.
18"	7'-8"	2	1'-11 1/2"	4	1'-7 1/2"	8	8"	8	12'-2"	2	1'-11 1/2"	4	8"	2	1'-7 1/2"	10	8"	14
24"	9'-2"	2	2'-2"	4	1'-8 1/2"	10	8"	9	14'-8"	2	2'-2"	4	8"	2	1'-8 1/2"	12	8"	18
30"	10'-8"	2	2'-4 1/2"	4	1'-11 1/2"	10	8"	12	17'-8"	2	2'-4 1/2"	4	8"	2	1'-11 1/2"	14	8"	22
36"	12'-8"	2	2'-10"	6	2'-3"	12	8"	14	20'-8"	2	2'-10"	6	8"	3	2'-3"	14	8"	28
42"	15'-2"	2	3'-9 1/2"	8	2'-9 1/2"	16	8"	15	23'-8"	2	3'-9 1/2"	8	8"	4	2'-9 1/2"	18	8"	30
48"	16'-8"	2	4'-3"	10	3'-1"	18	8"	16	25'-8"	2	4'-3"	10	8"	5	3'-1"	20	8"	32
54"	18'-2"	2	4'-8 1/2"	12	3'-5 1/2"	20	8"	17	27'-8"	2	4'-9"	12	8"	6	3'-5 1/2"	22	8"	34
60"	20'-2"	2	5'-5"	14	4'-0"	24	8"	18	30'-8"	2	5'-5"	14	8"	7	4'-0"	26	8"	36
72"	25'-2"	2	7'-4"	18	5'-1"	30	8"	20	36'-8"	2	7'-4"	18	8"	9	5'-1"	33	8"	40


ALL REINFORCING STEEL #4 BARS @ 6" O.C.

SOLID SODDING


PIPE DIA.	SINGLE R.C.P.C.						DOUBLE R.C.P.C.					
	3:1		4:1		6:1		3:1		4:1		6:1	
	SO. YDS.						SO. YDS.					
18"	5	7	12	6	8	13	5	7	12	6	8	13
24"	8	12	19	9	13	20	8	12	19	9	13	20
30"	13	18	29	14	19	30	13	18	29	14	19	30
36"	17	26	41	18	28	43	17	26	41	18	28	43
42"	23	35	55	25	37	57	23	35	55	25	37	57
48"	29	46	68	31	48	70	29	46	68	31	48	70
54"	35	57	85	37	59	87	35	57	85	37	59	87
60"	45	62	104	48	65	107	45	62	104	48	65	107
72"	64	92	156	67	95	159	64	92	156	67	95	159

NOTE: QUANTITIES SHOWN ABOVE ARE FOR ONE (1) END OF F.E.S.

- GENERAL NOTES
1. A CAST-IN-PLACE OR PRECAST CURTAIN WALL MAY BE USED. PAYMENT FOR THE CURTAIN WALL SHALL BE CONSIDERED TO BE INCLUDED IN THE UNIT PRICE BID EACH FOR FLARED END SECTIONS OF THE SEVERAL SIZES, WHICH PRICE SHALL BE FULL COMPENSATION FOR FURNISHING ALL MATERIALS INCLUDING REINFORCING STEEL AND CONCRETE; FOR FORMS, MIXING AND PLACING; FOR EXCAVATION AND BACKFILL, AND FOR ALL LABOR, TOOLS, EQUIPMENT AND INCIDENTALS NECESSARY TO COMPLETE THE WORK.
  2. ALL EXPOSED EDGES SHALL BE CHAMFERED 3/4".
  3. CONCRETE FOR CURTAIN WALL SHALL MEET THE REQUIREMENTS FOR CLASS A OR S CONCRETE AS PROVIDED IN SECTION 802 OF THE STANDARD SPECIFICATIONS OR FOR PAVING CONCRETE AS PROVIDED IN SECTION 501 OF THE STANDARD SPECIFICATIONS.
  4. WELDED WIRE MESH 3 x 3 W/10 x W/10 MAY BE USED IN LIEU OF REINFORCING BARS.

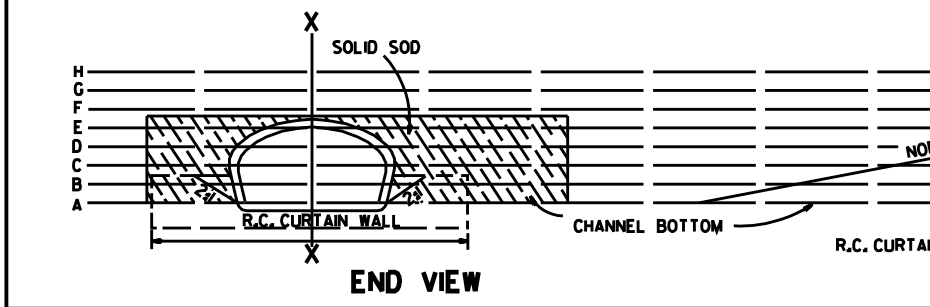


END VIEW

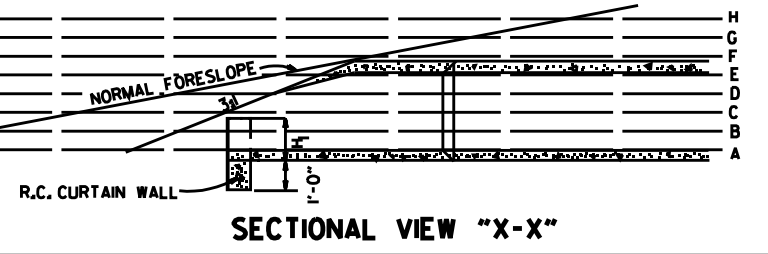

SECTIONAL VIEW "X-X"


10-18-98 ADDED NOTE TO SOLID SODDING		ARKANSAS STATE HIGHWAY COMMISSION
10-12-98 CORRECTED SPELLING		
11- 3-94 ADDED GENERAL NOTE NO. 4		
8-15-91 REV. CURTAIN WALL QUANT., STEEL SCH. & SOLID SOD QUANT.		
3-2-81 ALLOW PRECAST IN 2 OR MORE PIECES CHAMFER EDGES		
5-15-80 ADDED PRECAST WALL & GENERAL NOTES		
10-2-72 REVISED AND REDRAWN		
DATE	REVISION	FILMED
		STANDARD DRAWING FES-1

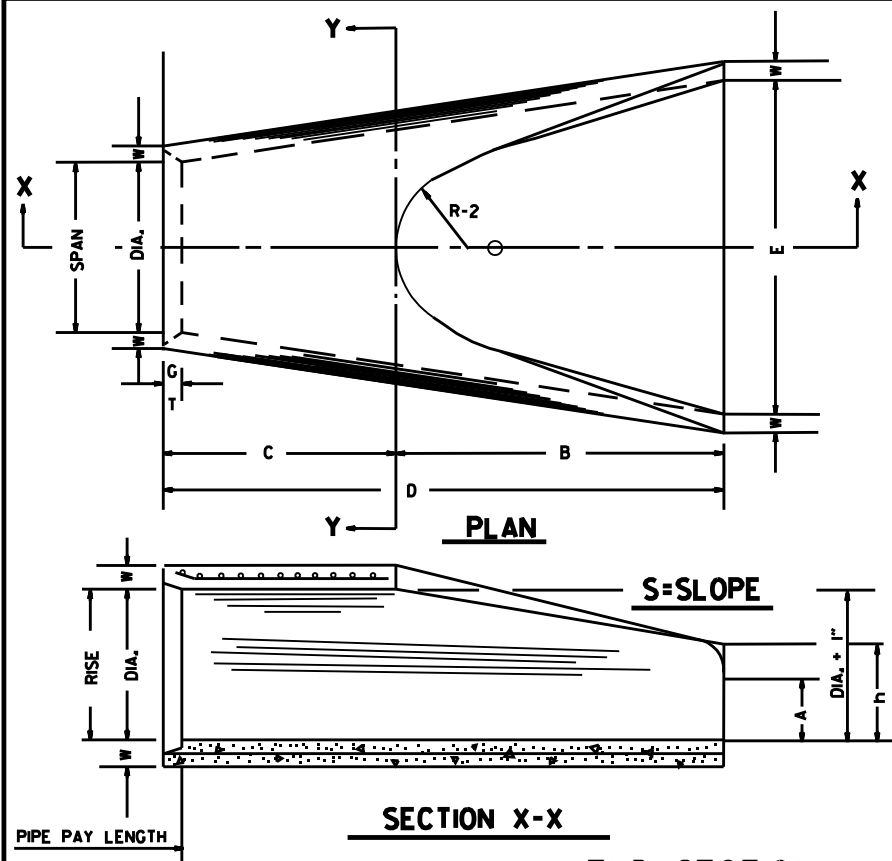

**END SECTION FOR REINFORCED CONCRETE PIPE CULVERTS**

**TABLE OF DIMENSIONS**

DIA.	WALL	A	B	C	D	E	S	DIA. + 1"	P	R-1	R-2	G-T	WT.	h
18"	2 1/2"	9"	2'-3"	3'-10"	6'-1"	3'-0"	3#1	19"	29"	15 1/2"	12"	2"	1000	1'-0 1/2"
24"	3"	9 1/2"	3'-7 1/2"	2'-6"	6'-1 1/2"	4'-0"	3#1	25"	33 3/8"	16 1/4"	14"	2 1/2"	1600	1'-1 1/2"
30"	3 1/2"	1'-0"	4'-6"	1'-7 1/2"	6'-1 3/4"	5'-0"	3#1	31"	37"	18 1/2"	15"	3 1/4"	1940	1'-4 1/2"
36"	4"	1'-3"	5'-3"	2'-10 1/4"	8'-1 1/2"	6'-0"	3#1	37"	47 1/4"	24 1/4"	20"	3 1/2"	4100	1'-8"
42"	4 1/2"	1'-9"	5'-3"	2'-11"	8'-2"	6'-6"	3#1	43"	53 1/2"	27 1/2"	22"	3 1/2"	5380	2'-2 1/2"
48"	5"	2'-0"	6'-0"	2'-2"	8'-2"	7'-0"	3#1	49"	56 1/2"	28 1/2"	22"	3 1/2"	6550	2'-6"
54"	5 1/2"	2'-4"	6'-6"	1'-10"	8'-4"	7'-6"	3#1	55"	65 1/2"	33 1/8"	24"	4"	8750	2'-10 1/2"
60"	6"	2'-10"	6'-6"	1'-10"	8'-4"	8'-0"	3#1	61"	72 1/2"	36 1/4"	24"	4"	9270	3'-5"
72"	7"	3'-10"	6'-6"	1'-10"	8'-4"	9'-0"	3#1	73"	77 1/4"	38 3/4"	24"	5"	13250	4'-6"

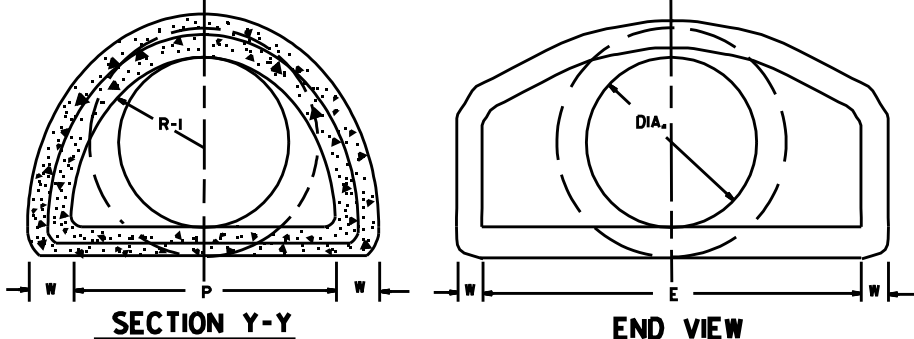


**SECTION Y-Y** and **END VIEW**

NOTE: TONGUE END ON UPSTREAM SECTION  
GROOVE END ON DOWNSTREAM SECTION


**ARCH PIPE**

EQUIV. DIA.	SPAN		RISE		W	A	B	C	D	E	P	R2	G-T	S
	AASHTO M 206	AHD NOMINAL	AASHTO M 206	AHD NOMINAL										
15	18	18	11	11	2"	4"	2'-0"	4'-0"	6'-0"	3'-0"	29"	12"	1 1/2"	2 1/2#1
18	22	22	13 1/2	14	2 1/2"	5"	2'-0"	4'-1"	6'-1"	3'-6"	32 1/8"	13"	2 1/2"	2 1/2#1
21	26	26	15 1/2	16	3"	7"	2'-3"	3'-10"	6'-1"	4'-0"	34 1/8"	14"	2 1/2"	2 1/2#1
24	28 1/2	29	18	18	3"	9"	2'-3"	3'-10"	6'-1"	5'-0"	36 1/8"	15"	2 1/2"	2 1/2#1
30	36 1/4	36	22 1/2	23	3 1/2"	10"	3'-1"	3'-0 1/2"	6'-1 1/2"	6'-0"	47 1/4"	20"	3"	2 1/2#1
36	43 1/4	44	26 1/2	27	4"	10 1/2"	4'-0"	2'-1 1/2"	6'-1 1/2"	6'-6"	54 1/4"	22"	3 1/2"	2 1/2#1
42	51 1/8	51	31 1/2	31	4 1/2"	11 1/2"	4'-7"	1'-10 1/4"	6'-5 1/4"	7'-2"	59 1/2"	23"	3 3/4"	2 1/2#1
48	58 1/2	59	36	36	5"	1'-3"	5'-3"	2'-10 1/4"	8'-1 1/4"	7'-10"	70 1/4"	24"	4 1/4"	2 1/2#1
54	65	65	40	40	5 1/2"	1'-7"	5'-3"	2'-11"	8'-2"	8'-6"	72 1/4"	24"	4 1/4"	2 1/2#1
60	73	73	45	45	6"	1'-10"	5'-6"	2'-8"	8'-2"	9'-0"	77 1/4"	24"	5"	2 1/2#1

\* THE MEASURED SPAN AND RISE SHALL NOT VARY MORE THAN ± 2 PER CENT FROM THE VALUES SPECIFIED BY AASHTO M 206.

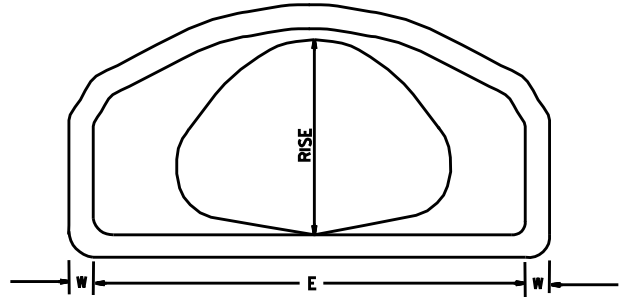


**END VIEW CONCRETE ARCH PIPE**

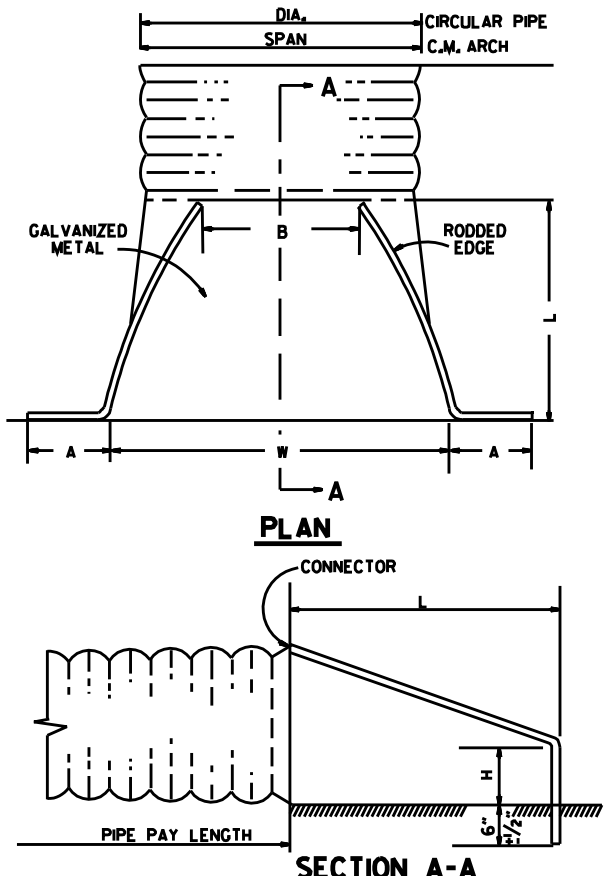


**SECTION A-A**

NOTE: ALTERNATE CONNECTIONS TO THE PIPE CULVERTS, IN ACCORDANCE WITH MANUFACTURER'S STANDARD PRACTICES, MAY BE MADE SUBJECT TO THE APPROVAL OF THE ENGINEER.

**END SECTIONS FOR CORRUGATED METAL PIPE CULVERTS**

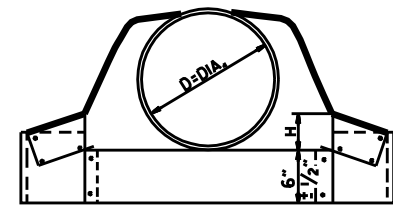

**CIRCULAR PIPE**




**C.M. ARCH PIPE**

**CIRCULAR PIPE**


D. DIA.	GAUGE	A	B. MAX.	H	L	W	S
12	16	6	6	6	21	24	2 1/2#1
15	16	7	8	6	26	30	2 1/2#1
18	16	8	10	6	31	36	2 1/2#1
21	16	9	12	6	36	42	2 1/2#1
24	16	10	13	6	41	48	2 1/2#1
30	14	12	16	8	51	60	2 1/2#1
36	14	14	19	9	60	72	2 1/2#1
42	12	16	22	11	69	84	2 1/2#1
48	12	18	27	12	78	90	2 1/2#1
54	12	18	30	12	84	102	2#1
60	12	18	33	12	87	114	1 1/2#1
66	12	18	36	12	87	120	1 1/2#1
72	12	18	39	12	87	126	1 1/3#1

**C.M. ARCH PIPE**

EQUIV. DIA.	SPAN	RISE	A	B	H	L	W	S	GAUGE
15"	17	13	7	9	6	19	30	2 1/2#1	16
18"	21	15	7	10	6	23	36	2 1/2#1	16
21"	24	18	8	12	6	28	42	2 1/2#1	16
24"	28	20	9	14	6	32	48	2 1/2#1	16
30"	35	24	10	16	6	39	60	2 1/2#1	14
36"	42	29	12	18	8	46	75	2 1/2#1	14
42"	49	33	13	21	9	53	85	2 1/2#1	12
48"	57	38	18	26	12	63	90	2 1/2#1	12
54"	64	43	18	30	12	70	102	2 1/4#1	12
60"	71	47	18	33	12	77	114	2 1/4#1	12

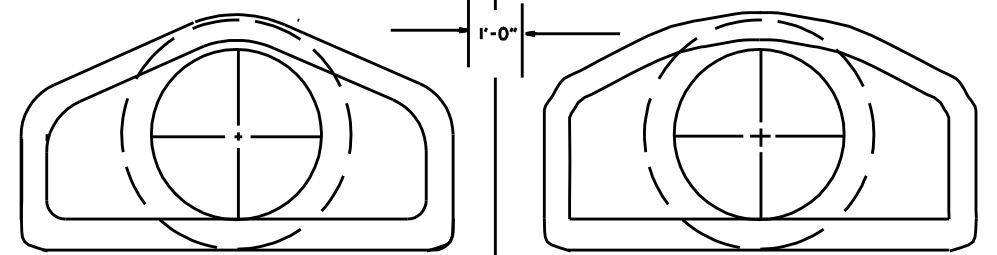

**MULTIPLE R.C. PIPE CULVERTS**

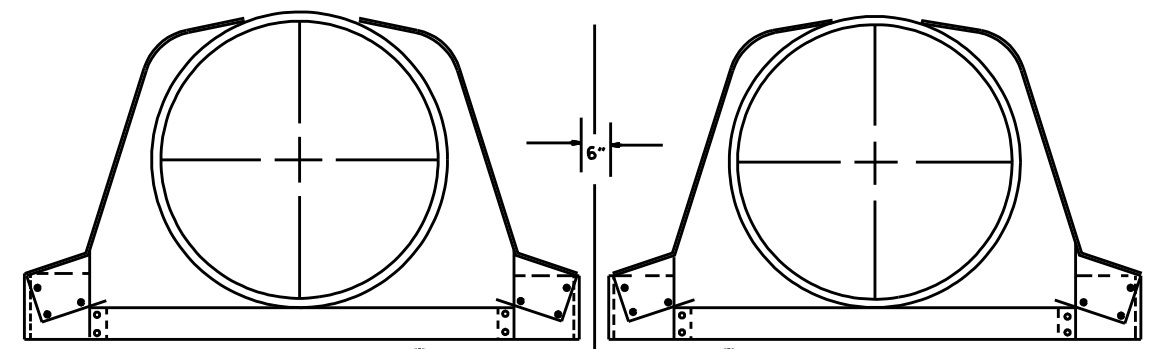


**MULTIPLE C.M. PIPE CULVERTS**

10-18-96	REVISED ASTM REF. TO AASHTO		
5-15-80	REVISED DISTANCE BETWEEN MULTIPLE R.C.P. F.E.S.	664-5-15-80	ARKANSAS STATE HIGHWAY COMMISSION
7-14-78	C.M. ARCH SIZES TO CONFORM WITH AASHTO SIZES	752-7-14-78	
8-22-75	ADDED MULTIPLE PIPE CULVERTS	517-8-22-75	FLARED END SECTION
12-5-74	REMOVED NOTE RE REINF. FOR R.C. F.E.S.	500-12-5-74	
5-24-73	CMP END SECTION, SHOW PIPE PAY LENGTH	627-5-24-73	
10-2-72	REVISED AND REDRAWN	760-10-2-72	STANDARD DRAWING FES-2
DATE	REVISION	FIG. NO.	

4'-0" LENGTH DROP INLET DROP INLET EXTENSION





PIPE SIZE	MIN. WIDTH	HEIGHT 5'-0"		PLUS OR MINUS PER LIN. FT. OF HEIGHT		4'-0"		8'-0"	
		CLASS A CONC. CU. YDS.	REINF. STEEL POUNDS	CLASS A CONC. CU. YDS.	REINF. STEEL POUNDS	CLASS A CONC. CU. YDS.	REINF. STEEL POUNDS	CLASS A CONC. CU. YDS.	REINF. STEEL POUNDS
18"	2'-6"	1.77	156	0.28	22				
24"	2'-6"	1.79	156	0.28	22				
30"	3'-2"	2.39	205	0.30	26				
36"	3'-8"	2.63	236	0.32	28				
42"	4'-4"	2.95	250	0.34	30				
48"	4'-10"	3.21	265	0.36	32				
						DEDUCT FROM QUANTITY COMPUTED FOR EACH EXTENSION ADDED.			
						0.04	3		

NOTE: QUANTITIES ARE APPROXIMATE AND ARE SHOWN FOR BIDDER INFORMATION ONLY.

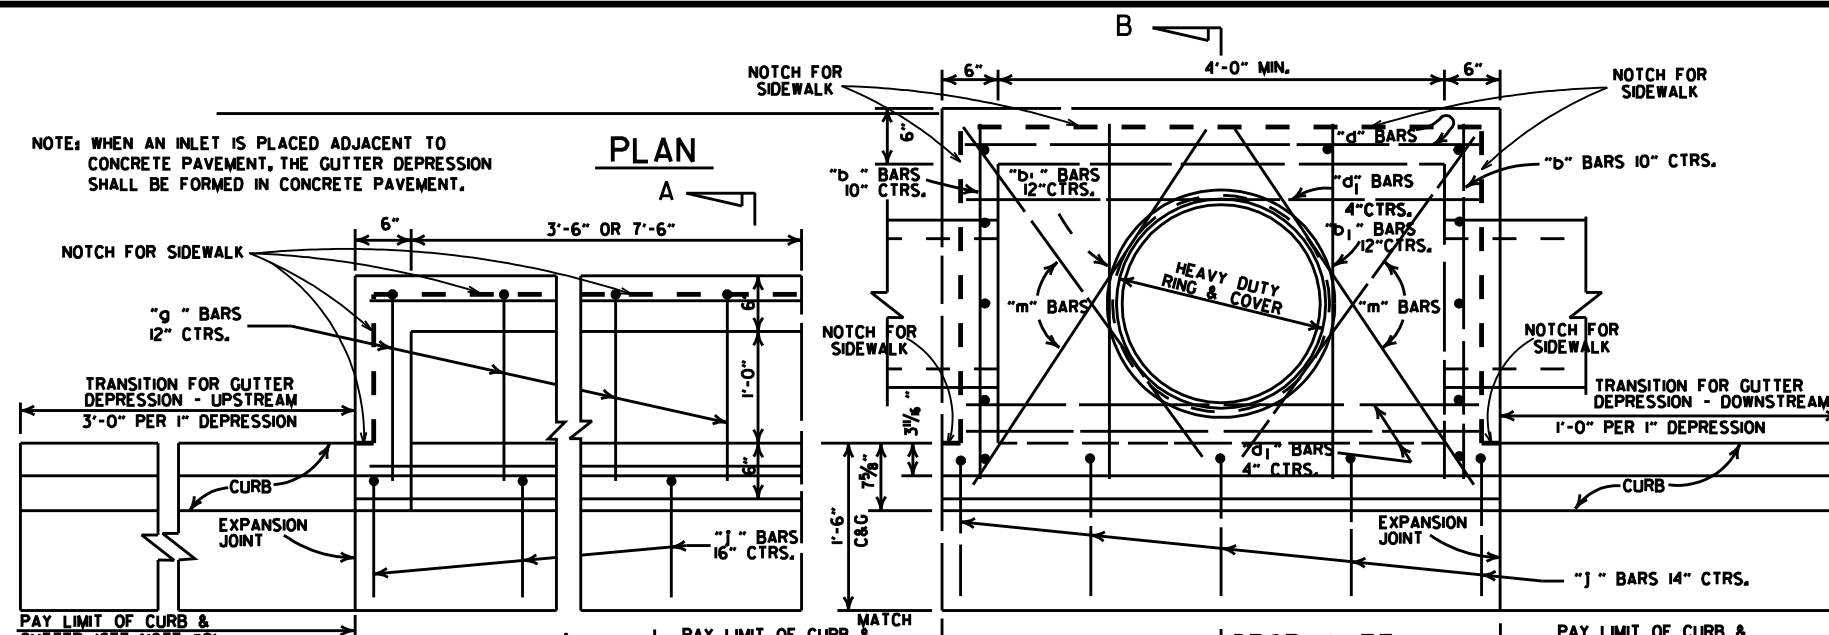


DEDUCT FROM QUANTITY COMPUTED FOR EACH PIPE ENTERING INLET

INSIDE DIA. PIPE INCHES	CLASS CONC. CU. YDS.	REINF. STEEL POUNDS
18	0.05	2
24	0.09	3
30	0.13	4
42	0.24	8

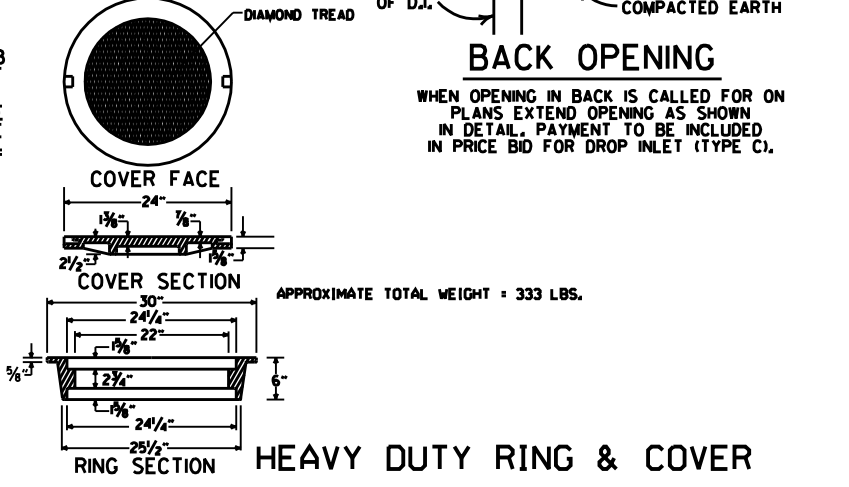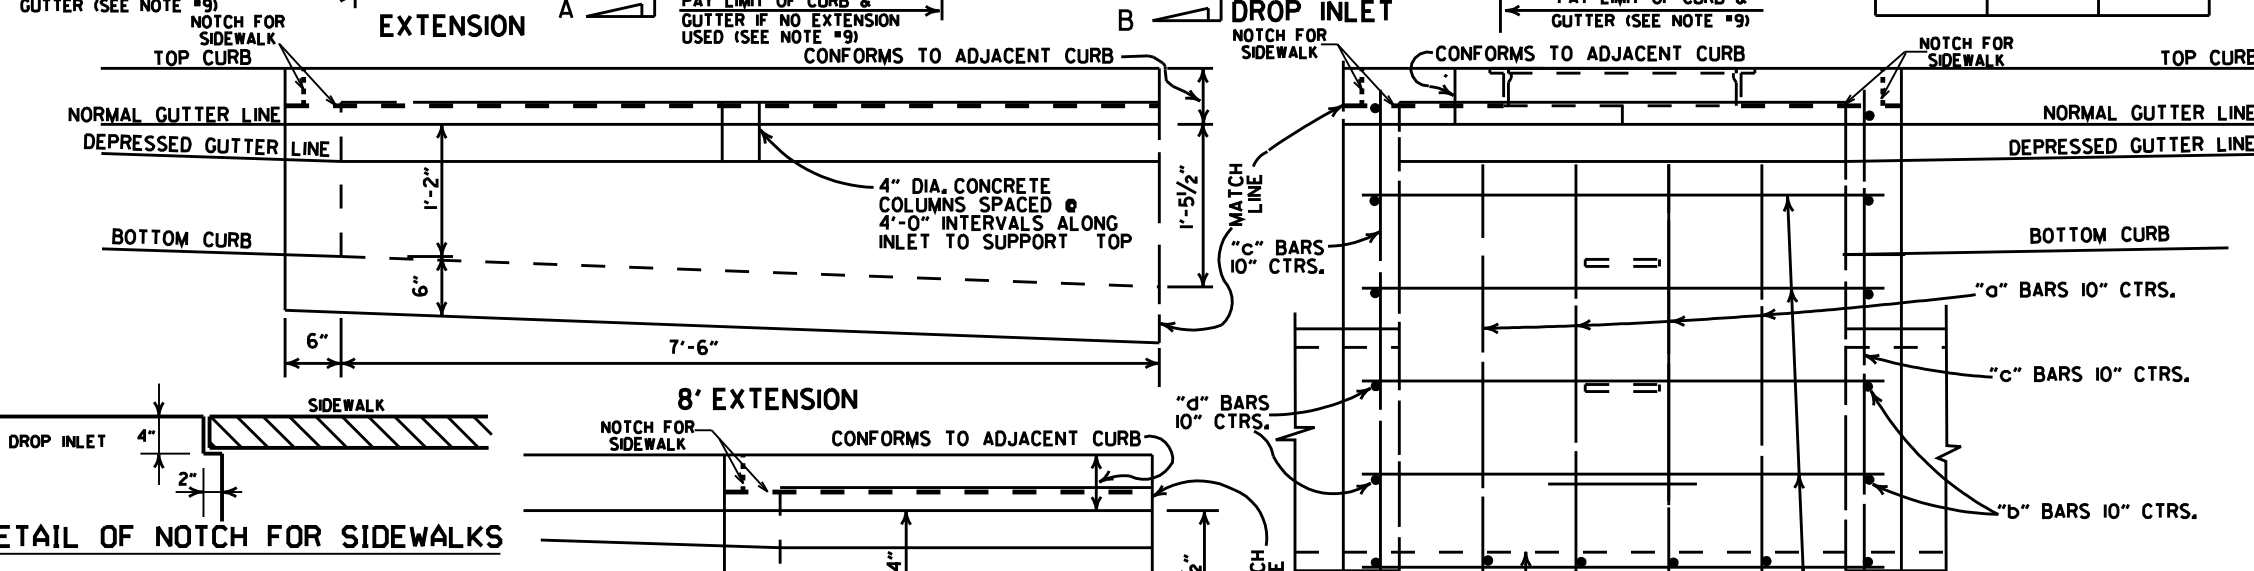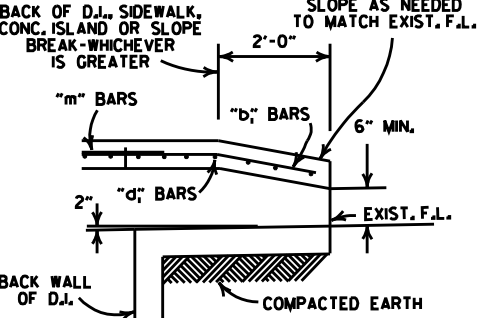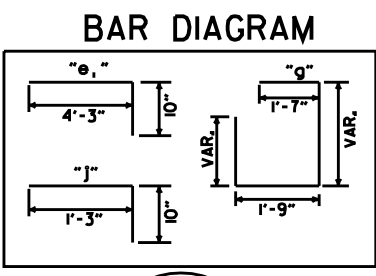

- GENERAL NOTES:
- ALL EXPOSED CORNERS TO HAVE 3/4" CHAMFER.
  - STEPS SHALL BE INSTALLED IN ALL INLETS 4'-0" HIGH AND OVER OF AS APPROVED BY THE ENGINEER.
  - ALL REINF. BARS SHALL BE #4 AND HAVE 1/2" COVER.
  - DROP INLETS AND EXTENSION ON CURVED SECTIONS SHALL CONFORM TO THE CURVATURE OF THE CURB.
  - THIS DROP INLET MAY BE CONSTRUCTED ON NEW OR EXISTING R.C. BOX CULVERT AS SHOWN ON F.P.C.-9
  - WHEN PLANS CALL FOR DROP INLET OVER 10'-0" HIGH, FLOOR AND WALLS SHALL BE CONSTRUCTED AS SHOWN FOR TYPE "RM" DROP INLET (F.P.C.-9D).
  - HEAVY DUTY RING SHALL ALWAYS BE INSTALLED WITH FLANGE ON TOP.
  - DURING CONSTRUCTION OF THE ROADWAY THE CONTRACTOR SHALL MAINTAIN DRAINAGE INTO OR AROUND THE DROP INLET AS APPROVED BY THE ENGINEER.
  - PAYMENT FOR CURB AND/OR CURB AND GUTTER WITHIN THE LIMITS OF DROP INLETS AND DROP INLET EXTENSIONS SHALL BE CONSIDERED INCLUDED IN PAYMENT MADE FOR DROP INLETS AND/OR DROP INLET EXTENSIONS.
  - HEAVY DUTY RING AND COVER SHALL BE CONSTRUCTED OF CAST IRON AND SHALL CONFORM TO THE REQUIREMENTS OF THE STANDARD SPECIFICATIONS FOR GRAY IRON CASTINGS AASHTO M105 CLASS 35B & AASHTO M306.
  - HEAVY DUTY RING AND COVER SHALL NOT BE PAINTED.
  - 4"x2" NOTCH SHALL BE FORMED IN ALL DROP INLETS TO SUPPORT SIDEWALK CONSTRUCTION. REFER TO DETAIL OF NOTCH FOR SIDEWALKS.
  - DIMENSIONS SHOWN FOR RING AND COVER ARE TYPICAL, THE CONTRACTOR MAY SUBSTITUTE SIMILAR CASTINGS WITH THE APPROVAL OF THE ENGINEER. REQUESTING APPROVAL FOR CASTING DESIGNS MAY BE MADE BY REFERRING TO PREVIOUSLY APPROVED DRAWINGS.

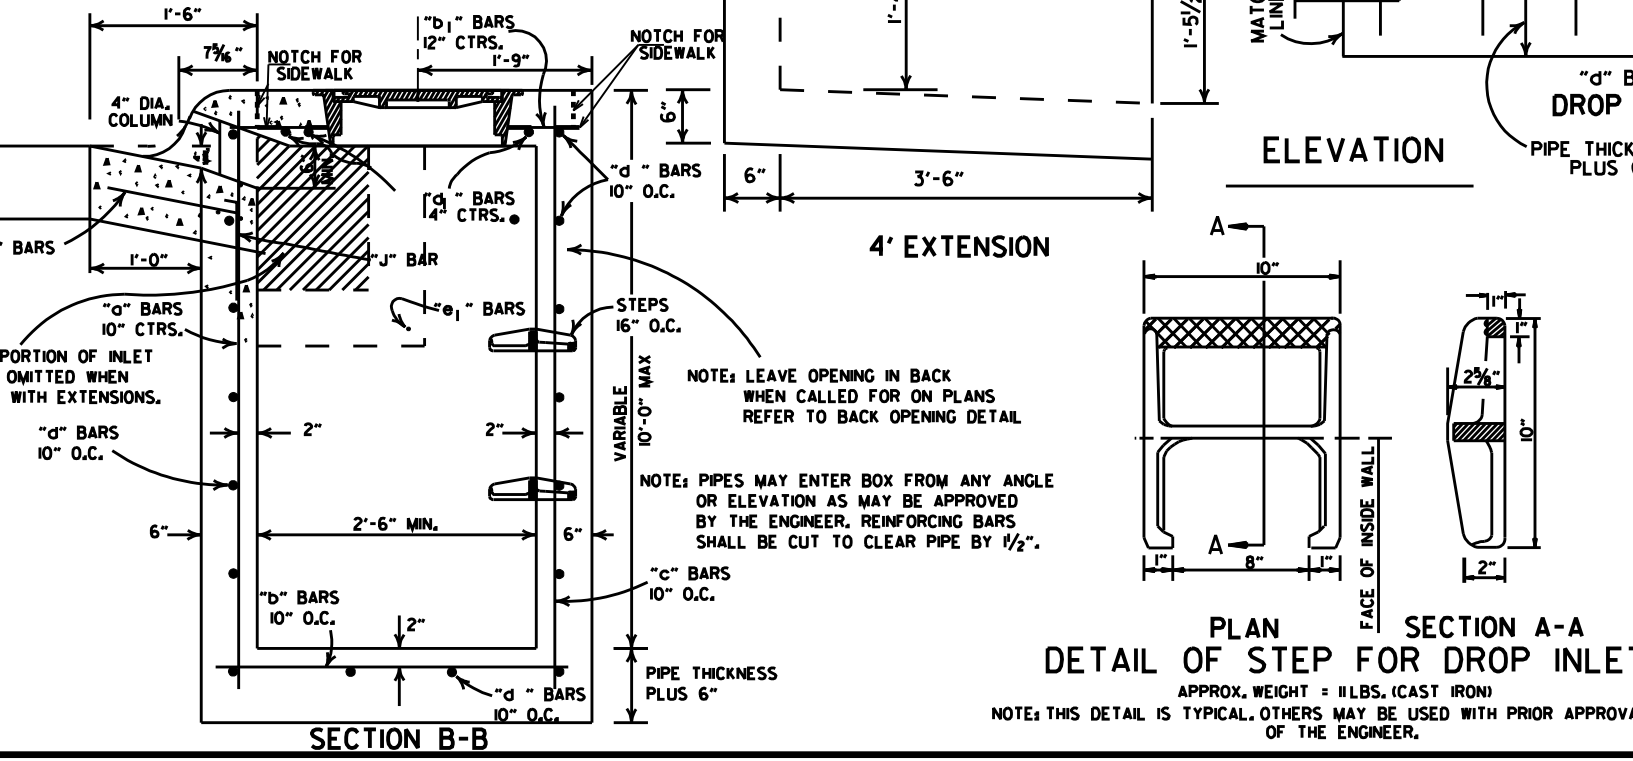

DATE	REV.	REVISION	DATE FILMED
8-22-02		ADDED PAY LIMIT CURB NOTES TO SECTIONS A-A & B-B	
11-16-01		ADDED NOTE 13, REVISED SECTION B-B	
1-12-00		CORRECTED DIMENSION ON SECTION B-B & REVISED RING & COVER	
5-13-99		ADDED DETAIL OF NOTCH FOR SIDEWALKS	
7-02-98		REPLACED RING & COVER W/HEAVY DUTY RING & COVER	
		ADDED NOTES 9, 10, & 11	
10-18-96		CORRECTED SPELLING	
4-26-96		ADDED NOTE 8 & REVISED (4'x8') EXTENSION TITLES	10-18-96
4-1-93		REVISED BACK OPENING & NOTE	
8-15-91		DELETE TYPE IV GRATE	
7-15-88		REVISED STEP DETAIL	
5-20-83		REVISED DETAILS OF GRATES (TYPE IV & IV-A)	
2-4-83		ADDED GENERAL NOTE NO. 4	
3-2-81		ADDED TYPE IV-A GRATE	
5-22-74		DELETED INLET (TYPE F) & GRATE (TYPE III)	
10-2-72		REVISED AND REDRAWN	

ARKANSAS STATE HIGHWAY COMMISSION

DETAILS OF DROP INLETS (TYPE C)

STANDARD DRAWING FPC-9E

**REINFORCED CONCRETE ARCH PIPE DIMENSIONS**

EQUIV. DIA.	SPAN		RISE	
	AASHTO M 206	AHTD NOMINAL	AASHTO M 206	AHTD NOMINAL
INCHES	INCHES			
15	18	18	11	11
18	22	22	13½	14
21	26	26	15½	16
24	28½	29	18	18
30	36¼	36	22½	23
36	43¾	44	26¾	27
42	51¾	51	31¾	31
48	58½	59	36	36
54	65	65	40	40
60	73	73	45	45
72	88	88	54	54
84	102	102	62	62
90	115	115	72	72
96	122	122	77½	77
108	138	138	87½	87
120	154	154	96¾	97
132	168¾	169	106½	107

THE MEASURED SPAN AND RISE SHALL NOT VARY MORE THAN ± 2 PERCENT FROM THE VALUES SPECIFIED BY AASHTO M206.

**REINFORCED CONCRETE HORIZONTAL ELLIPTICAL PIPE DIMENSIONS**

EQUIV. DIA.	AASHTO M 207	
	SPAN	RISE
INCHES	INCHES	
18	23	14
24	30	19
27	34	22
30	38	24
33	42	27
36	45	29
39	49	32
42	53	34
48	60	38
54	68	43
60	76	48
66	83	53
72	91	58
78	98	63
84	106	68

THE MEASURED SPAN AND RISE SHALL NOT VARY MORE THAN ± 2 PERCENT FROM THE VALUES SPECIFIED BY AASHTO M207.

**CONSTRUCTION SEQUENCE**

1. PLACE STRUCTURAL BEDDING MATERIAL TO GRADE. DO NOT COMPACT.
2. INSTALL PIPE TO GRADE.
3. COMPACT STRUCTURAL BEDDING OUTSIDE THE MIDDLE THIRD OF THE PIPE.
4. PLACE AND COMPACT THE HAUNCH AREA UP TO THE MIDDLE OF THE PIPE.
5. COMPLETE BACKFILL ACCORDING TO SUBSECTION 606.03.(F)(X).

NOTE: HAUNCH AND STRUCTURAL BEDDING MATERIAL WILL NOT BE PAID FOR SEPARATELY, BUT COMPENSATION WILL BE CONSIDERED TO BE INCLUDED IN THE PRICE BID PER LINEAR FOOT OF CONCRETE PIPE.


**- LEGEND -**

- D<sub>1</sub> = NORMAL INSIDE DIAMETER OF PIPE
- D<sub>o</sub> = OUTSIDE DIAMETER OF PIPE
- H = FILL COVER HEIGHT OVER PIPE (FEET)
- MIN. = MINIMUM
- UNDISTURBED SOIL

INSTALLATION TYPE	MATERIAL REQUIREMENTS FOR HAUNCH AND STRUCTURAL BEDDING
TYPE 1	AGGREGATE BASE COURSE (CLASS 5 OR CLASS 7)
TYPE 2	SELECTED MATERIALS (CLASS SM-1, SM-2, OR SM-4) OR TYPE 1 INSTALLATION MATERIAL*
TYPE 3**	AASHTO CLASSIFICATION A-1 THRU A-6 SOIL OR TYPE 1 OR 2 INSTALLATION MATERIAL

\* SM-3 WILL NOT BE ALLOWED.

\*\* MATERIALS SHALL NOT INCLUDE ORGANIC MATERIALS OR STONES LARGER THAN 3 INCHES.

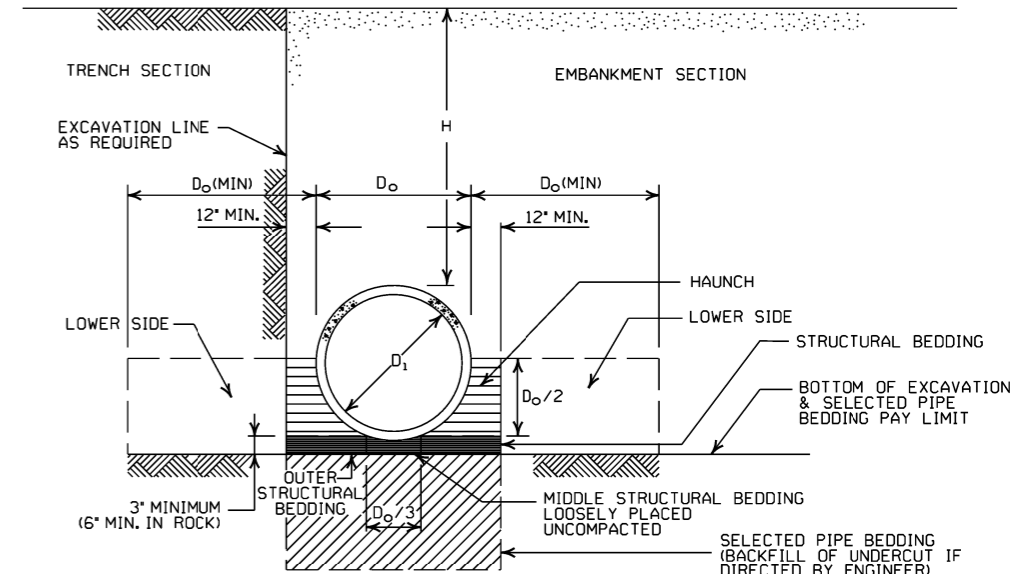

**EMBANKMENT AND TRENCH INSTALLATIONS**

1. MATERIAL IN THE HAUNCH AND OUTER STRUCTURAL BEDDING SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.
2. FOR TRENCHES WITH WALLS OF NATURAL SOIL, THE DENSITY OF THE SOIL IN THE LOWER SIDE ZONE SHALL BE AS FIRM AS THE 95% DENSITY REQUIRED FOR THE HAUNCH. IF THE EXISTING SOIL DOES NOT MEET THIS CRITERIA, IT SHALL BE REMOVED AND RECOMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OF MATERIAL USED.
3. FOR EMBANKMENTS, THE MATERIAL IN THE LOWER SIDE ZONE SHALL BE COMPACTED TO 95% OF THE MAXIMUM DENSITY ACCORDING TO THE TYPE OR CLASS OF MATERIAL USED.

**GENERAL NOTES**

1. CONCRETE PIPE CULVERT CONSTRUCTION SHALL CONFORM TO ARKANSAS STATE HIGHWAY AND TRANSPORTATION DEPARTMENT STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION), WITH APPLICABLE SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS, UNLESS OTHERWISE NOTED IN THE PLANS, SECTION AND SUBSECTION REFER TO THE STANDARD CONSTRUCTION SPECIFICATIONS.
2. CONCRETE PIPE CULVERT DESIGN SHALL CONFORM TO AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, FIFTH EDITION (2010) WITH 2010 INTERIMS.
3. ALL PIPE SHALL CONFORM TO SECTION 606. CIRCULAR R.C. PIPE CULVERTS SHALL CONFORM TO AASHTO M170, R.C. ARCH PIPE CULVERTS SHALL CONFORM TO AASHTO M206 AND HORIZONTAL ELLIPTICAL PIPE CULVERTS SHALL CONFORM TO AASHTO M207.
4. ALL PIPE SHALL BE PROTECTED DURING CONSTRUCTION BY A COVER SUFFICIENT TO PREVENT DAMAGE FROM PASSAGE OF EQUIPMENT.
5. THE MINIMUM TRENCH WIDTH SHALL BE THE OUTSIDE DIAMETER OF THE PIPE PLUS 24 INCHES. THE MAXIMUM ALLOWABLE TRENCH WIDTH SHALL BE THE MINIMUM WIDTH PRACTICABLE FOR WORKING CONDITIONS.
6. MULTIPLE PIPE CULVERTS SHALL BE INSTALLED WITH A MINIMUM CLEARANCE OF 24 INCHES BETWEEN STRINGS OF PIPE. REFER TO STD. DWG. FES-2 FOR MINIMUM CLEARANCE WHERE FLARED END SECTIONS ARE USED.
7. IMPERVIOUS MATERIAL SHOULD BE PLACED AS DIRECTED BY THE ENGINEER AT THE ENDS OF THE CULVERT TO PREVENT LOSS OF STRUCTURAL BEDDING WHEN PERVIOUS MATERIAL IS USED FOR STRUCTURAL BEDDING AND/OR BACKFILL.
8. NOT MORE THAN ONE LIFTING HOLE MAY BE PROVIDED IN CONCRETE PIPE TO FACILITATE HANDLING. HOLE MAY BE CAST IN PLACE, CUT INTO THE FRESH CONCRETE AFTER FORMS ARE REMOVED, OR DRILLED. THE HOLE SHALL NOT BE MORE THAN TWO INCHES IN DIAMETER OR TWO INCHES SQUARE. CUTTING OR DISPLACEMENT OF REINFORCEMENT WILL NOT BE PERMITTED. SPALLED AREAS AROUND THE HOLE SHALL BE REPAIRED IN A WORKMANLIKE MANNER. LIFTING HOLE SHALL BE FILLED WITH MORTAR, CONCRETE, OR OTHER METHOD AS APPROVED BY THE ENGINEER.
9. WHEN DIRECTED BY THE ENGINEER, UNSUITABLE MATERIAL THAT IS ENCOUNTERED AT THE BOTTOM OF THE EXCAVATED TRENCH (BELOW THE AREA IDENTIFIED AS "STRUCTURAL BEDDING" ABOVE) WILL BE EXCAVATED AND REPLACED WITH SELECTED PIPE BEDDING. THE QUANTITY OF MATERIAL REQUIRED TO BACKFILL THE UNDERCUT AREA UP TO THE SELECTED PIPE BEDDING PAY LIMIT DESIGNATED ABOVE WILL BE MEASURED AND PAID FOR AS "SELECTED PIPE BEDDING."
10. WHEN THE EXISTING MATERIAL EXCAVATED FOR THE PIPE TRENCH IS DETERMINED BY THE ENGINEER TO BE UNSUITABLE FOR BACKFILLING THE PIPE (ABOVE THE AREA IDENTIFIED ABOVE AS THE HAUNCH), BORROW MATERIAL OR MATERIAL FROM THE ROADWAY EXCAVATION WILL BE USED TO BACKFILL THE PIPE. IF SUITABLE MATERIAL IS NOT AVAILABLE, THE ENGINEER MAY AUTHORIZE THE USE OF "SELECTED PIPE BACKFILL."

**MINIMUM HEIGHT OF FILL "H" OVER CIRCULAR R.C. PIPE CULVERTS**

INSTALLATION TYPE	CLASS OF PIPE			
	CLASS III		CLASS IV	CLASS V
PIPE ID (IN.)	TYPE 1 OR 2	TYPE 3	ALL	ALL
	FEET			
12-15	2	2.5	2	1
18-24	2.5	3	2	1
27-33	3	4	2	1
36-42	3.5	5	2	1
48	4.5	5.5	2	1
54-60	5	7	2	1
66-78	6	8	2	1
84-108	7.5	8	2	1

NOTE: FOR MINIMUM COVER VALUES, "H" SHALL INCLUDE A MINIMUM OF 12" OF PAVEMENT AND/OR BASE.

**MAXIMUM HEIGHT OF FILL "H" OVER CIRCULAR R.C. PIPE CULVERTS**

INSTALLATION TYPE	CLASS OF PIPE		
	CLASS III	CLASS IV	CLASS V
	FEET		
TYPE 1	21	32	50
TYPE 2	16	25	39
TYPE 3	12	20	30

NOTE: IF FILL HEIGHT EXCEEDS 50 FEET, A SPECIAL DESIGN CONCRETE PIPE WILL BE REQUIRED USING TYPE 1 INSTALLATION.

**MINIMUM HEIGHT OF FILL "H" OVER R.C. ARCH & HORIZONTAL ELLIPTICAL PIPE CULVERTS**

INSTALLATION TYPE	CLASS OF PIPE	
	CLASS III	CLASS IV
	FEET	
TYPE 2 OR TYPE 3	2.5	1.5

NOTE: TYPE 1 INSTALLATION WILL NOT BE ALLOWED FOR ARCH & HORIZONTAL ELLIPTICAL PIPE CULVERTS.

NOTE: FOR MINIMUM COVER VALUES, "H" SHALL INCLUDE A MINIMUM OF 12" OF PAVEMENT AND/OR BASE.

**MAXIMUM HEIGHT OF FILL "H" OVER R.C. ARCH & HORIZONTAL ELLIPTICAL PIPE CULVERTS**




INSTALLATION TYPE	CLASS OF PIPE	
	CLASS III	CLASS IV
	FEET	
TYPE 2	13	21
TYPE 3	10	16

NOTE: TYPE 1 INSTALLATION WILL NOT BE ALLOWED FOR ARCH & HORIZONTAL ELLIPTICAL PIPE CULVERTS.


DATE	REVISION	DATE FILMED
2-27-14	REVISED GENERAL NOTE 1.	
12-15-11	REVISED FOR LRFD DESIGN SPECIFICATIONS	
5-18-00	REVISED TYPE 3 BEDDING & ADDED NOTE	
3-30-00	REVISED INSTALLATIONS	
11-06-97	ISSUED	

<b>ARKANSAS STATE HIGHWAY COMMISSION</b> <b>CONCRETE PIPE CULVERT</b> <b>FILL HEIGHTS &amp; BEDDING</b> <b>STANDARD DRAWING PCC-1</b>	


# DRAWER PLAN VIEW

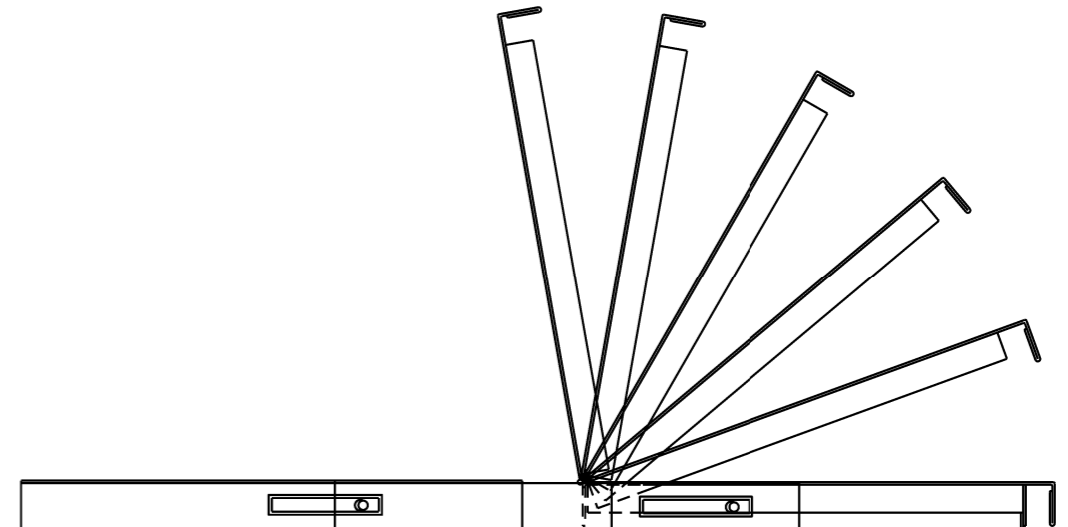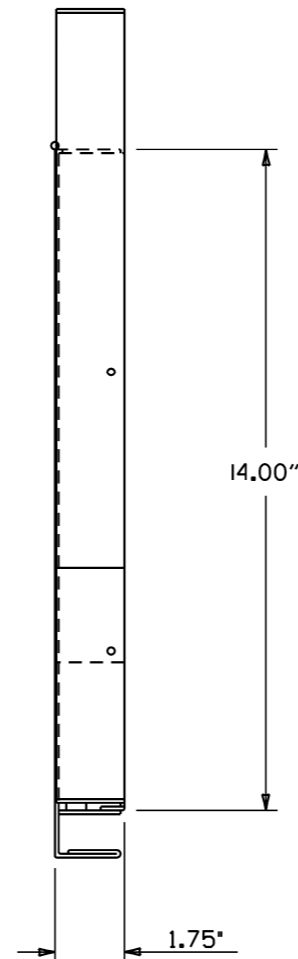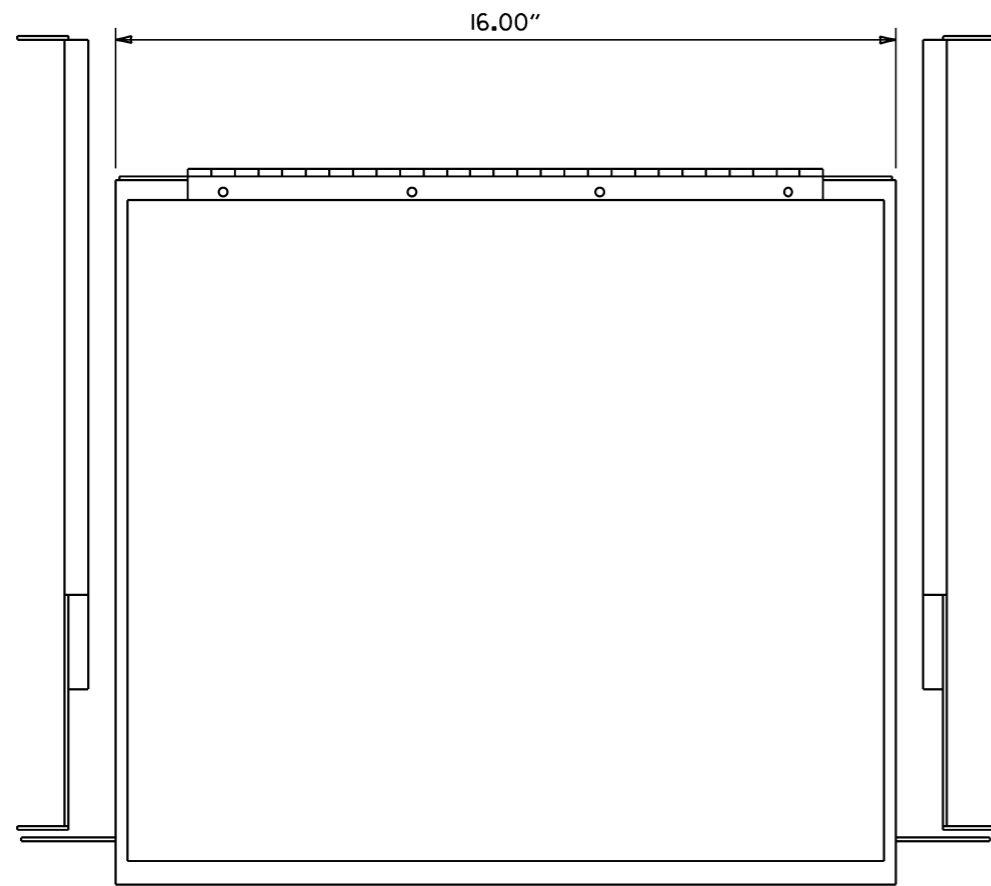

- NOTES:  
 1. RIGHT HAND SLIDE SHOWN, LEFT SLIDE OPPOSITE.  
 2. GENERAL DEVICES (CC3002-99-0102) OR EQUAL AND CONTAINS (1) RIGHT HAND SLIDE ASSEMBLY, (1) LEFT HAND SLIDE ASSEMBLY.  
 3. ALL HARDWARE NECESSARY TO FASTEN SLIDE ASSEMBLY TO UNDERSIDE OF CONTROLLER SHELF SHALL BE INCLUDED.



FRONT VIEW

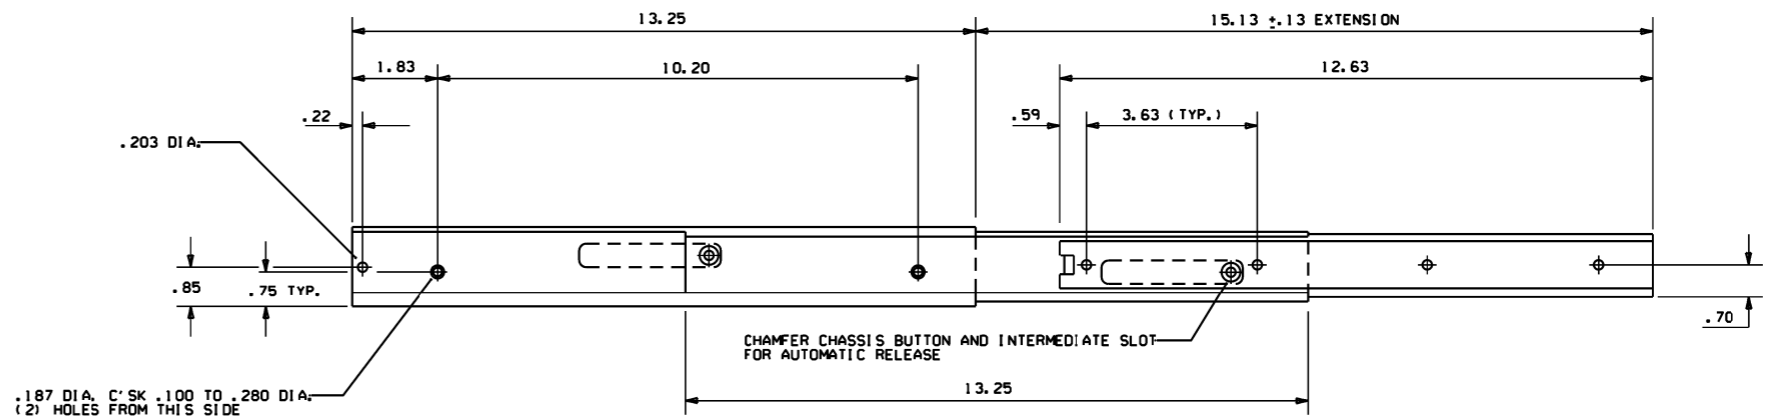


RIGHT SIDE ASSEMBLY


			ARKANSAS STATE HIGHWAY COMMISSION
			<b>CONTROLLER CABINET UTILITY DRAWER</b>
9-12-13	ISSUED AS STANDARD DRAWING		
6-15-05	ISSUED		
DATE	REVISION	DATE FILED	STANDARD DRAWING SD-5




# CONDUIT ENTRY TO EXISTING POLE BASE

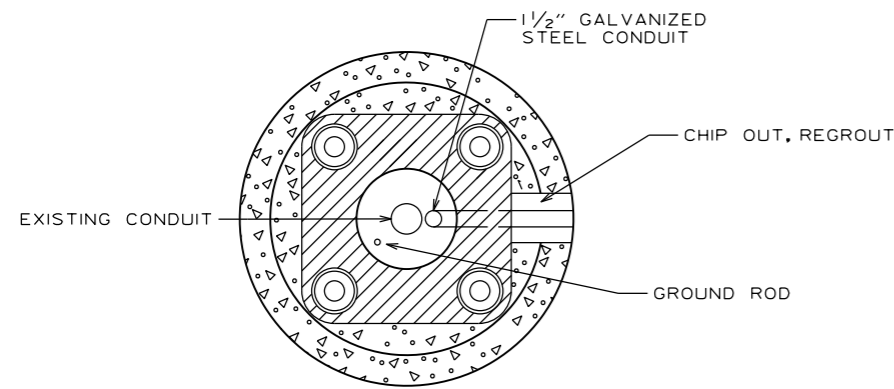

# ANCHOR BASE

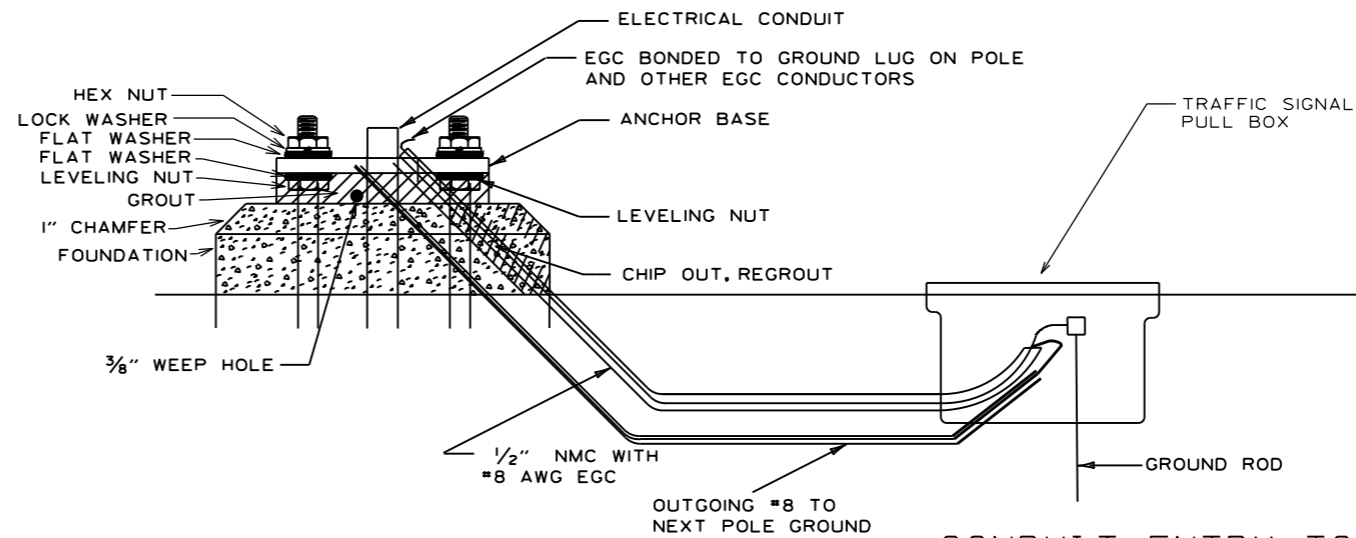


# CONDUIT ENTRY TO EXISTING CONTROLLER CABINET

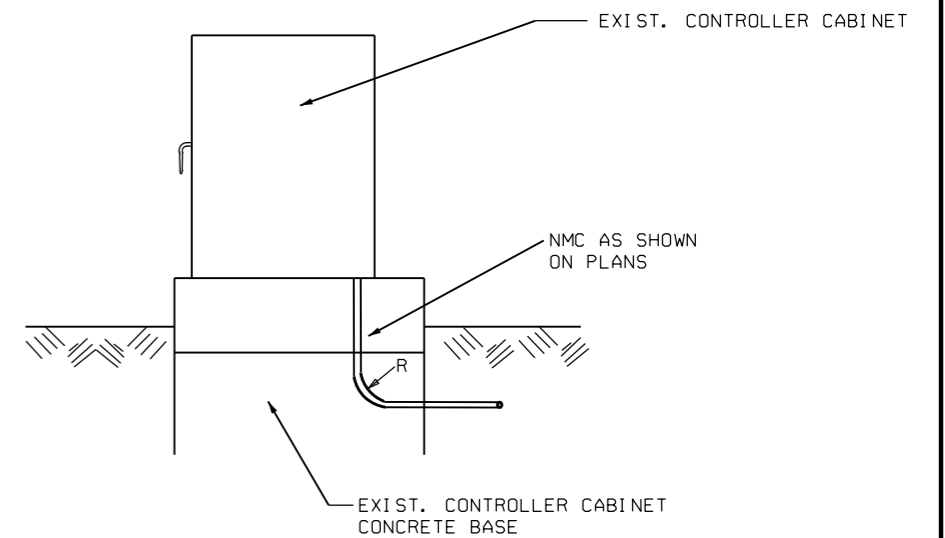


NOTE: ENTRY TO CABINET SHALL BE THROUGH A CUT IN THE BASE SUFFICIENT TO PROVIDE ADEQUATE CONDUIT RADIUS FOR ITEM.

# TYPE "HD" CONCRETE PULL BOX DETAIL

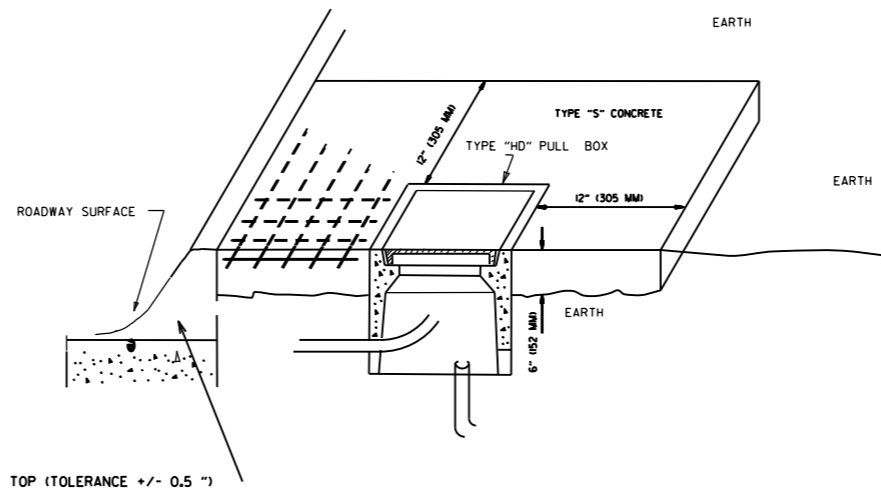


2" CLEAR FROM TOP (TOLERANCE +/- 0.5 ")

NOTE: ALL TYPE 1 AND TYPE 2 HD PULL BOXES ARE INSTALLED WITH AN APRON OF CONCRETE 12" (305 MM) WIDE AND 7" (178 MM) IN DEPTH. ALL PAYMENT SHALL BE INCLUDED IN THE PRICE OF THE TYPE HD PULL BOX. PULL BOX SHALL BE INSTALLED FLUSH TO SURROUNDING GRADE UNLESS OTHERWISE INSTRUCTED BY THE ENGINEER. THE CONCRETE SHALL BE CLASS "S". THREE #6 REINFORCING BARS IN THE APRON ON ALL SIDES OF THE PULL BOX IS REQUIRED IN CONCRETE.

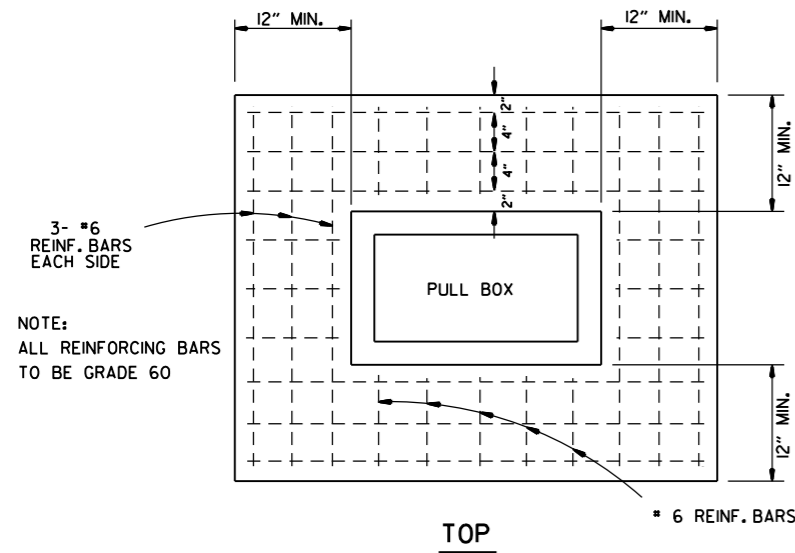

NOTE: ALL REINFORCING BARS TO BE GRADE 60

## TOP

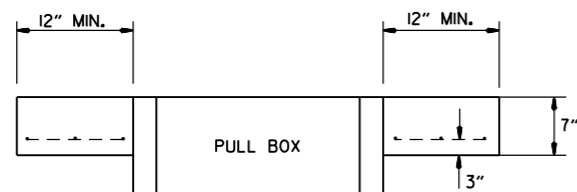








## ELEVATION

DATE	REVISION	DATE FILM
9-2-15	REVISED PULL BOX DEPTH	
9-12-13	ISSUED AS STANDARD DRAWING	
5-21-09	REVISED GROUNDING	
7-31-08	ADDED & REVISED CONDUIT ENTRY	
6-23-04	REVISED CLEARANCE AT CURB ENTRY	
1-4-02	ADDED REINFORCING TO BOX APRON	
7-2-01	REVISED	
12-27-99	REVISED NOTES	
11-18-98	ISSUED	

ARKANSAS STATE HIGHWAY COMMISSION

## HEAVY DUTY PULL BOX


STANDARD DRAWING SD-6

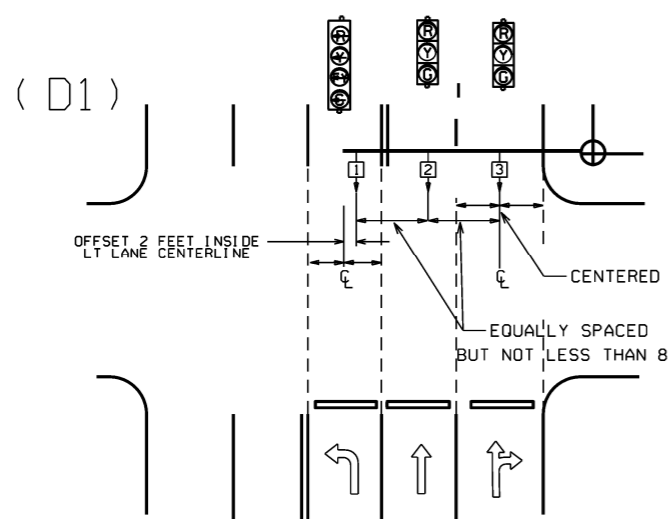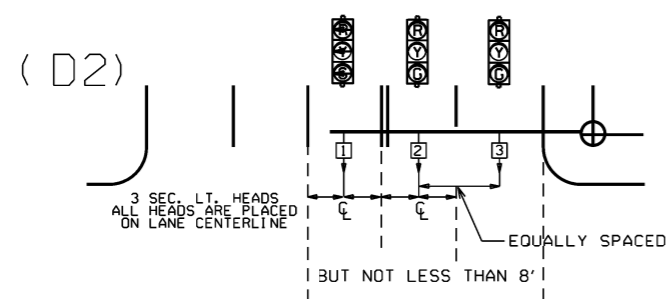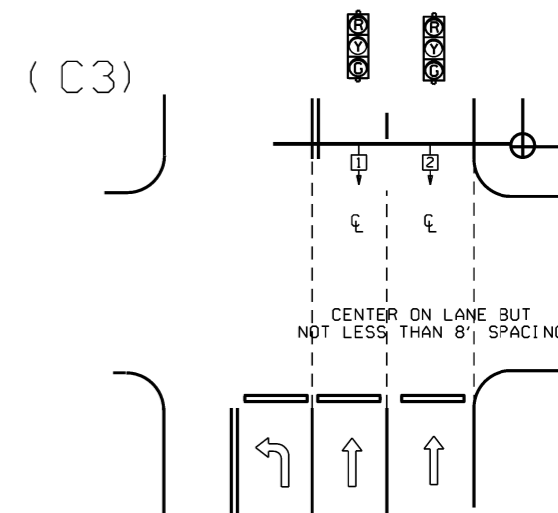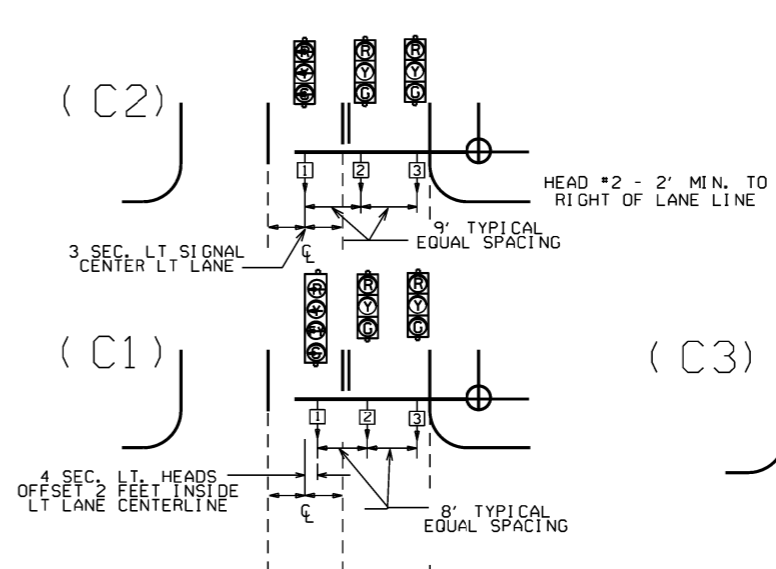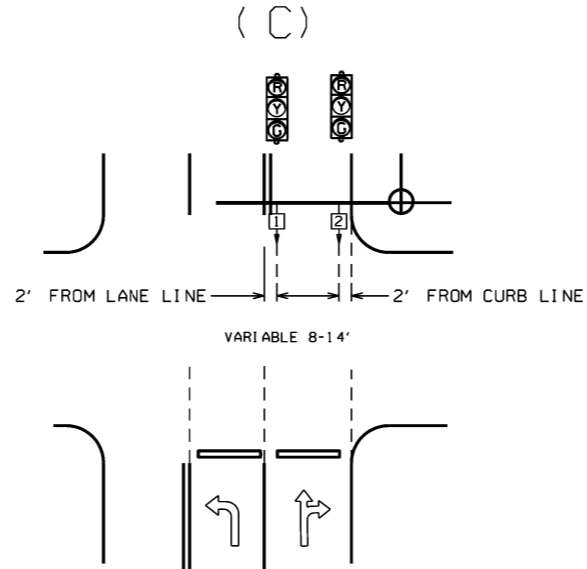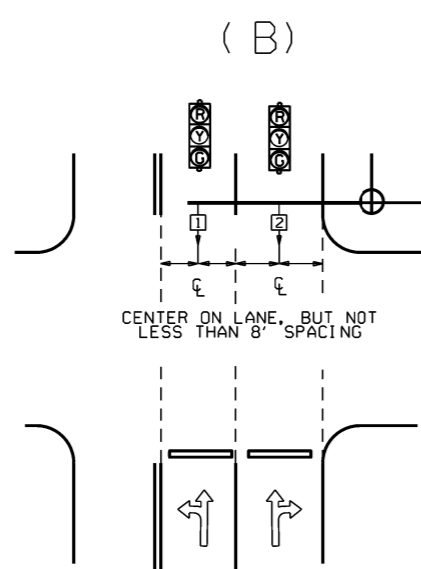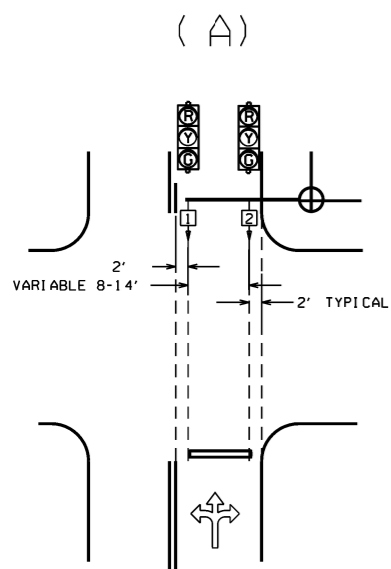

NOTE: WHERE LEFT TURN HEAD (HEAD 1 ON D1 AND D2) IS NOT CALLED FOR ON PLANS, MAST ARM LENGTH MAY STILL BE ALLOWED FOR FUTURE INSTALLATION. HEADS FOR THROUGH MOVEMENTS SHALL STILL BE ALIGNED WITH THROUGH LANES AS SHOWN ON DETAILS.

GENERAL NOTES:

- FOUR SECTION "PROTECTED/PERMISSIVE" LEFT TURN HEADS SHOULD BE PLACED A MINIMUM OF TWO (2') FEET TO THE RIGHT OF THE CENTERLINE OF THE APPROACHING LEFT TURN LANE.
- THREE SECTION "PROTECTED" LEFT TURN HEADS SHOULD BE PLACED ON THE CENTERLINE OF THE APPROACHING LEFT TURN LANE.
- WHEN IT IS NECESSARY TO PLACE POLES OTHER THAN AS SHOWN ON PLAN SHEET(S) RESULTING IN MAST ARM EXTENDING MORE THAN TWO FEET PAST (TO THE LEFT OF) THE CENTERLINE OF THE APPROACHING LEFT TURN LANE, MAST ARM SHALL BE CUT TO APPROPRIATE LENGTH AS DETERMINED BY THE ENGINEER, AND A NEW END CAP PROVIDED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING THIS PRIOR TO INSTALLING THE MAST ARM IF ADDITIONAL COMPENSATION IS REQUIRED.
- SIGNAL HEAD SPACING SHALL, IN NO CASE, BE LESS THAN EIGHT (8') FEET BETWEEN HEADS ON CENTER, MEASURED HORIZONTALLY PERPENDICULAR TO THE APPROACH.
- ALL SIGNAL HEADS SHOWN ON THIS DETAIL SHEET SHALL BE LOCATED ACCORDING TO THE DIMENSIONS SHOWN IN RELATION TO THE APPROACH SIDE OF THE INTERSECTION.
- MAXIMUM MOUNTING HEIGHT OF SIGNAL FACES LOCATED BETWEEN 40 FEET AND 53 FEET FROM STOP BAR SHALL BE IN ACCORDANCE WITH FIGURE 4D-1 OF 2009 MUTCD.

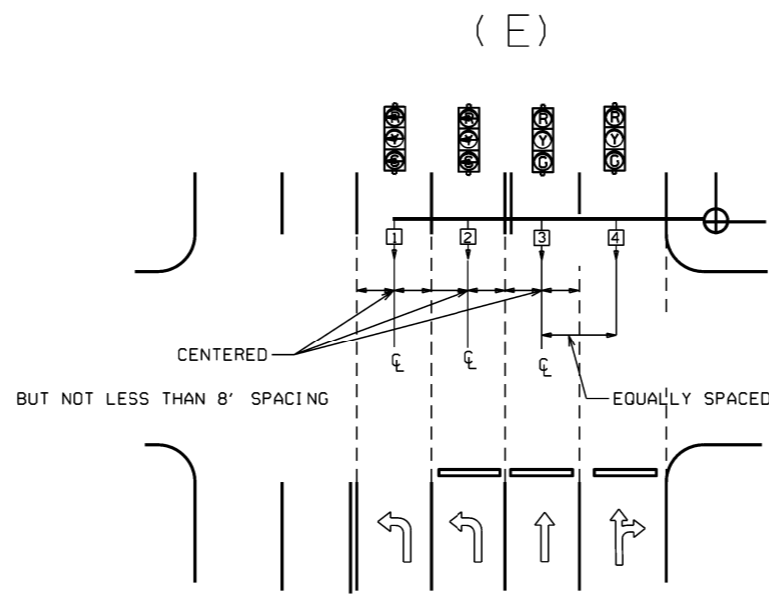

℄ = CENTER OF LANE FROM APPROACH SIDE

			ARKANSAS STATE HIGHWAY COMMISSION
9-12-13	ISSUED AS STANDARD DRAWING		SIGNAL HEAD PLACEMENT
3-11-10	2009 MUTCD		
12-9-99	ISSUED		
DATE	REVISION	DATE FILM	STANDARD DRAWING SD-8

NOTES, PED AND TRAFFIC SIGNAL HEAD SIGNS:  
EACH ITEM "TRAFFIC SIGNAL HEAD (4 SEC., 1-WAY)" SHALL INCLUDE A SPECIAL SIGN AS SHOWN, ATTACHED TO THE MAST ARM OR SPAN ASSEMBLY 12" TO THE RIGHT OF THE SIGNAL HEAD UNLESS REMOVED WITHIN THE SIGNAL PLAN NOTES.

EACH ITEM "TRAFFIC SIGNAL HEAD (3 SEC., 1-WAY)" TO BE USED AS A LEFT TURN INDICATION ONLY SHALL INCLUDE A SIGN (R10-10) AS SHOWN, ATTACHED TO THE MAST ARM OR SPAN ASSEMBLY 12" TO THE RIGHT OF THE SIGNAL HEAD.

EACH PEDESTRIAN PUSHBUTTON SHALL HAVE ONE R10-3E SIGN ATTACHED TO THE POLE ABOVE THE BUTTON. ALL SIGN FACES SHALL BE CONSTRUCTED OF HIGH INTENSITY SHEETING (TYPE III) WITH SILKSCREEN LEGEND AND BORDER.

ALL SIGN BLANKS SHALL BE CONSTRUCTED OF ALUMINUM ALLOY (ASTM DESIGNATION B-209, ALLOY 5052-H38) WITH THICKNESS OF 0.100 INCH.

GENERAL NOTES:  
1. MAST ARM POLES SHALL BE MOUNTED A MINIMUM OF 4 FT. BEHIND CURB OR SHOULDER.

2. OCTAGONAL POLES AND ARMS MEETING THE REQUIREMENTS OF THE PLANS AND SPECIFICATIONS CAN BE INSTALLED IN LIEU OF ROUND. ALL POLES AND ARMS IN A JOB MUST BE THE SAME SHAPE.

3. MINIMUM STRUCTURAL REQUIREMENTS:  
DESIGN SPECIFICATIONS: AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS, 4TH EDITION (2001) WITH 2003 AND 2006 INTERIMS.

USE FATIGUE CATEGORY I FOR ALL STRUCTURES ON ROUTES WHERE THE SPEED LIMIT IS 65 MPH AND GREATER AT THE STRUCTURE LOCATION AND ON ROUTES WHERE SPEED LIMIT IS GREATER THAN 45 MPH WITH AN ARM 60' OR LONGER.

USE FATIGUE CATEGORY II FOR STRUCTURES ON ROUTES WITH A SPEED LIMIT LESS THAN 65 MPH AND GREATER THAN 45 MPH WITH ARMS LESS THAN 60' AND ROUTES WITH SPEED LIMITS OF 45 MPH AND LESS WITH AN ARM 60' OR LONGER.

USE FATIGUE CATEGORY III FOR ALL STRUCTURES WHERE SPEED LIMIT IS 45 MPH AND LESS AND ARMS LESS THAN 60'.

CONSTRUCTION SPECIFICATIONS: ARKANSAS STATE HIGHWAY AND TRANSPORTATION DEPARTMENT STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION (CURRENT EDITION) WITH APPLICABLE SUPPLEMENTAL SPECIFICATIONS AND SPECIAL PROVISIONS.

BASE WIND SPEED: 90 MPH.

STEEL MEMBERS CONSIDERED MAIN LOAD CARRYING MEMBERS WITH A THICKNESS GREATER THAN 1/2" SHALL MEET THE LONGITUDINAL CHARNY V-NOTCH TEST SPECIFIED IN SUBSECTION 807.05 OF THE STANDARD SPECIFICATIONS.

DEAD LOAD: AS A MINIMUM, DESIGN SHALL BE BASED ON THE FIXED ATTACHMENTS SHOWN BELOW OR AS MODIFIED IN THE PLANS.

ALL SIGNAL HEADS TO BE ONE WAY, 12 INCH, AND HAVE 5 IN. BACK PLATES.

HEADS AT END OF ARM - ONE 4 SEC., 85 LB., 16.0 SQ. FT. ONE SIGN MOUNTED 3 FT. FROM SIGNAL \* 2' X 0' X 2' \* 6", 20 LB. REMAINING HEADS SPACED A 8 FT. \* 3 SEC., 56 LB., TWO 5 SEC.)  
14.4 SQ. FT. DESIGN TO ACCOMMODATE (INCLUDING 2 HEADS FOR ARMS 10 TO 15 FT., 2 HEADS FOR ARMS 10 TO 15 FT., INCLUDING LB. 3 HEADS FOR 18 TO 24 FT. ARMS, 4 HEADS FOR OVER 26 FT. ARMS.

STREET NAME SIGN -- 72" X 18", 36 LB., MOUNTED SUCH THAT OUTSIDE EDGE IS NOT GREATER THAN 12 FT. FROM POLE. DEPENDING UPON POSITION OF SIGNAL HEAD ADJACENT TO POLE, SIGN MAY OVERLAP POLE SHAFT ROADWAY LUMINAIRES (WHERE REQUIRED ON PLAN SHEET) \* VARIABLE ARM LENGTH (MAX.), 3.3 SQ. FT., 75 LB. PED SIGNALS -- TWO 2 SEC. 12 INCH MOUNTED 8 FT. FROM BASE OF POLE. POST MOUNTED 3 SEC. SIGNAL HEAD AT 10 FT. ON SIDE OF POLE.


4. POLE/MAST ARM CAP -- POLE AND MAST ARMS CAPS SHALL BE PROVIDED, FABRICATED OF EITHER STEEL OR CAST ALUMINUM.

5. HAND HOLE -- HAND HOLES SHALL BE 4 X 6 INCHES FOR STANDARD, AND 3 X 5 INCHES FOR PED POLES, MINIMUM PLACED APPROXIMATELY 12 INCHES FROM BASE, AND SHALL BE FIXED WITH A BOLT DOWN COVER. A VACUUM FORMED ABS COVER IS AN ACCEPTABLE ALTERNATE TO STEEL. POLES GREATER THAN 21 FT. IN HEIGHT (FOR ROADWAY LUMINAIRE ATTACHMENT) SHALL INCLUDE A HAND HOLD WITHIN 12 INCHES OF MAST ARM(S) ATTACHMENT(S).

6. POLE/MAST ARM TAPER AND SLOPE - AVERAGE TAPER OF SIGNAL ARMS AND POLE SHALL BE 0.125 TO 0.15 INCHES PER FT.

MAST ARM CENTERLINE ANGLE AT ATTACHMENT POINT WITH POLE SHALL MAINTAIN NOT LESS THAN 0.5 DEGREES OR MORE THAN 4 DEGREES POSITIVE SLOPE WITH A LINE PERPENDICULAR TO THE POLE CENTERLINE. THE ARM SHALL MAINTAIN A POSITIVE AFTER IT IS PLACED UNDER LOAD.

7. NUT COVERS - EACH POLE SHALL INCLUDE A BOLT DOWN NUT COVER FOR EACH ANCHOR BOLT.

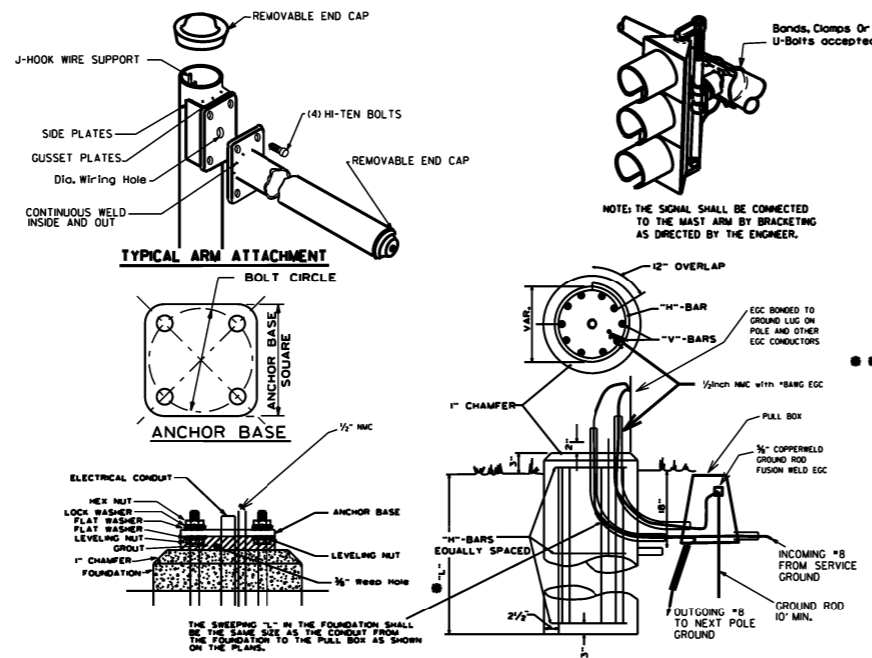


THE GROUND ROD SHALL BE FUSION WELDED TO A 1/2" X 1/8" A.W.G. SOLID COPPER GROUND WIRE. ATTACHMENT TO THE PRIMARY GROUND MAY BE BY AN APPROVED CLAMP. THE ROD IS TO BE LOCATED IN THE CONCRETE PULL BOX.

TYPICAL FOUNDATION DETAILS

POLE FOUNDATION MINIMUM DIMENSIONS AND STEEL REINFORCING. ALL REINFORCING STEEL SHALL BE GRADE 40 MIN.

ARM LENGTH	FDN. DIAMETER	DEPTH * L' •	STEEL		
			VERT.	HORZ.	O/C.
PED	30"	7'-0"	12-#7 (6'-6")	10-#4	8.44'
2' to 12'	30"	10'-6"	12-#7 (10'-0")	15-#4	8.42'
over 12' to 20'	30"	11'-6"	12-#7 (11'-0")	16-#4	8.66'
over 20' to 35'	36"	12'-6"	13-#8 (12'-0")	17-#4	8.88'
over 35' to 50'	36"	13'-6"	13-#8 (13'-0")	19-#4	8.56'
over 50' to 72'	42"	14'-6"	18-#8 (14'-0")	20-#4	8.74'
Twins to 20'	30"	16'-0"	12-#6 (15'-6")	22-#4	8.76'
Twins over 20' to 44'	36"	16'-0"	13-#8 (15'-6")	22-#4	8.76'
Twins over 44' to 50'	42"	16'-0"	18-#8 (15'-6")	22-#4	8.76'
Twins over 50' to 72'	42"	16'-6"	18-#8 (16'-0")	23-#4	8.64'

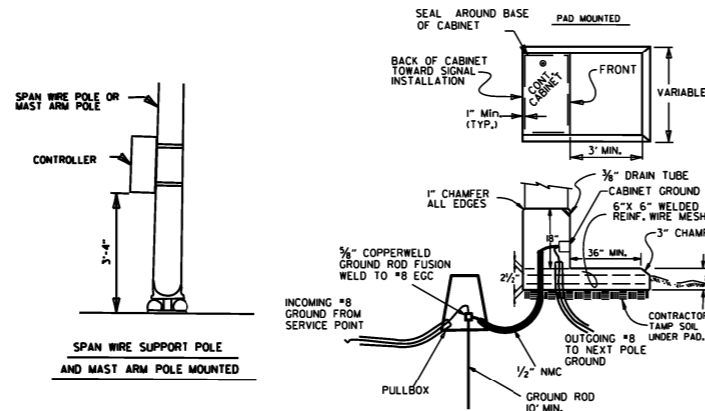

CONTROLLER CABINET MOUNTING DETAILS

UNLESS OTHERWISE DIRECTED BY THE ENGINEER, CABINET ORIENTATION SHALL BE SUCH THAT THE BACK OF THE CABINET IS PARALLEL TO THE STREET AND POSITIONED TO ALLOW VISIBILITY OF THE SIGNAL DISPLAY WHILE OBSERVING THE CONTROLLER FRONT PANEL.

8. GROUND ROD - A 10' X 5/8" GROUND ROD SHALL BE INSTALLED IN THE PULL BOX FOR EACH POLE AND THE CONTROLLER. PAYMENT FOR THE GROUND ROD AND 1/2" NMC SHALL BE INCLUDED IN ITEM 714 FOR SIGNAL POLES AND ITEM 701 FOR THE CONTROLLER. THE PULL BOX AND CONDUCTOR BOX SHALL BE PAID FOR SEPARATELY.

9. POLE BASE/FOUNDATION - ANCHOR BOLTS SHALL INCLUDE AS A MINIMUM, ONE LEVELING NUT, TWO FLAT WASHERS, ONE LOCK WASHER, AND ONE HEX. NUT. PERIMETER OF ANCHOR BASE SHALL BE GROUDED WITH A 1/4" WEEP HOLE. ALL CONCRETE SHALL BE CLASS 'S' OR GREATER.

10. CONCRETE - ALL CONCRETE FOR CONTROLLER CABINET AND POLE FOUNDATIONS SHALL BE CLASS 'S' OR GREATER.

11. PEDESTRIAN PHASES - PEDESTRIAN MOVEMENTS SHALL BE PUSH BUTTON ACTUATED AND CONCURRENTLY TIMED, UNLESS OTHERWISE INDICATED ON THE PLAN SHEET(S). FURNISHING AND INSTALLING PED PUSH SWITCH SHALL BE CONSIDERED SUBSIDIARY TO THE ITEM PEDESTRIAN SIGNAL HEAD.

SIGNAL OPERATION NOTES:



FLASHING OPERATION - PRIOR TO NORMAL OPERATION, SIGNAL SHALL BE FLASHED FOR A PERIOD OF 3 TO 5 WORK DAYS OR AS DIRECTED BY THE ENGINEER. SIGNAL SHALL BE PLACED IN OPERATION ONLY ON A REGULAR WORK DAY, EXCEPT FRIDAY.

THE CONTRACTOR MAY BE REQUIRED TO ALTER THE FLASHING DISPLAY DURING THE TEMPORARY FLASH PERIOD. AT THE TIME INTERSECTION IS PLACED IN PERMANENT OPERATION, THE FLASH SEQUENCE SHALL THEN BE RETURNED TO THAT INDICATED ON THE PLAN SHEETS. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED FOR THESE ALTERATIONS IN FLASH SEQUENCE.

● WHEN THE GROUND ELEVATION AT THE POLE IS LOWER THAN THE ROADWAY ELEVATION, THE LENGTH OF FOUNDATION ABOVE THE GROUND MAY BE INCREASED TO PROVIDE THE REQUIRED SIGNAL HEAD CLEARANCE ABOVE THE ROADWAY. WHEN THE REQUIRED LENGTH OF FOUNDATION ABOVE THE GROUND IS 18" OR LESS, NO INCREASE IN DEPTH "L" WILL BE REQUIRED. WHEN THE REQUIRED LENGTH OF FOUNDATION ABOVE THE GROUND IS 5'-6" OR LESS, INCREASE DEPTH "L" BY 1'-0". FOR LENGTHS GREATER THAN 5'-6", DEPTH "L" SHALL BE ADJUSTED AS DIRECTED BY THE ENGINEER. LONGITUDINAL REINFORCING, AS SHOWN IN THE TABLE, SHALL BE PROVIDED FOR THE LENGTH OF THE EXTENDED SHAFT AND #4 TIES SHALL BE PROVIDED AT A SPACING NOT TO EXCEED 9" ON CENTERS. PAYMENT WILL BE IN ACCORDANCE WITH SECTION 714 OF THE STANDARD SPECIFICATIONS.

● IN LIEU OF DESIGNING THE STRUCTURE TO RESIST PERIODIC GALLOPING, A VIBRATORY MITIGATION DEVICE MAY BE PROVIDED BY THE POLE MANUFACTURER. THE VIBRATORY MITIGATION DEVICE SHALL BE AN ANTI-GALLOPING PANEL CONSISTING OF A 60"X16"X0.25" SIGN BLANK MOUNTED NEAR THE END OF THE MAST ARM NOT TO EXCEED ONE QUARTER OF THE LENGTH OF THE MAST ARM FROM THE END OF THE MAST ARM WITH THE LONG AXIS OF THE PANEL COLLINEAR WITH THE LONG AXIS OF THE MAST ARM. THE PANEL SHOULD BE MOUNTED AT SUCH A HEIGHT AS TO PROVIDE AT LEAST 6" CLEAR FROM THE TOP OF ANY SIGNAL ASSEMBLY OR SIGN PANEL LOCATED ON THE MAST ARM WITHIN THE LENGTH OF THE ANTI-GALLOPING PANEL.

TRUCK-INDUCED GUST LOADS SHALL BE EXCLUDED FOR FATIGUE DESIGN FOR ALL STRUCTURES EXCEPT MAST ARMS MOUNTED OVER FACILITIES WITH POSTED SPEEDS OF 65 MPH OR GREATER AT THE LOCATION OF THE STRUCTURE.

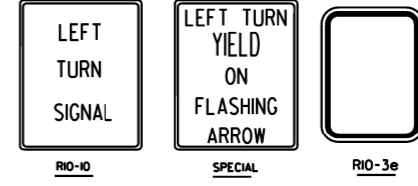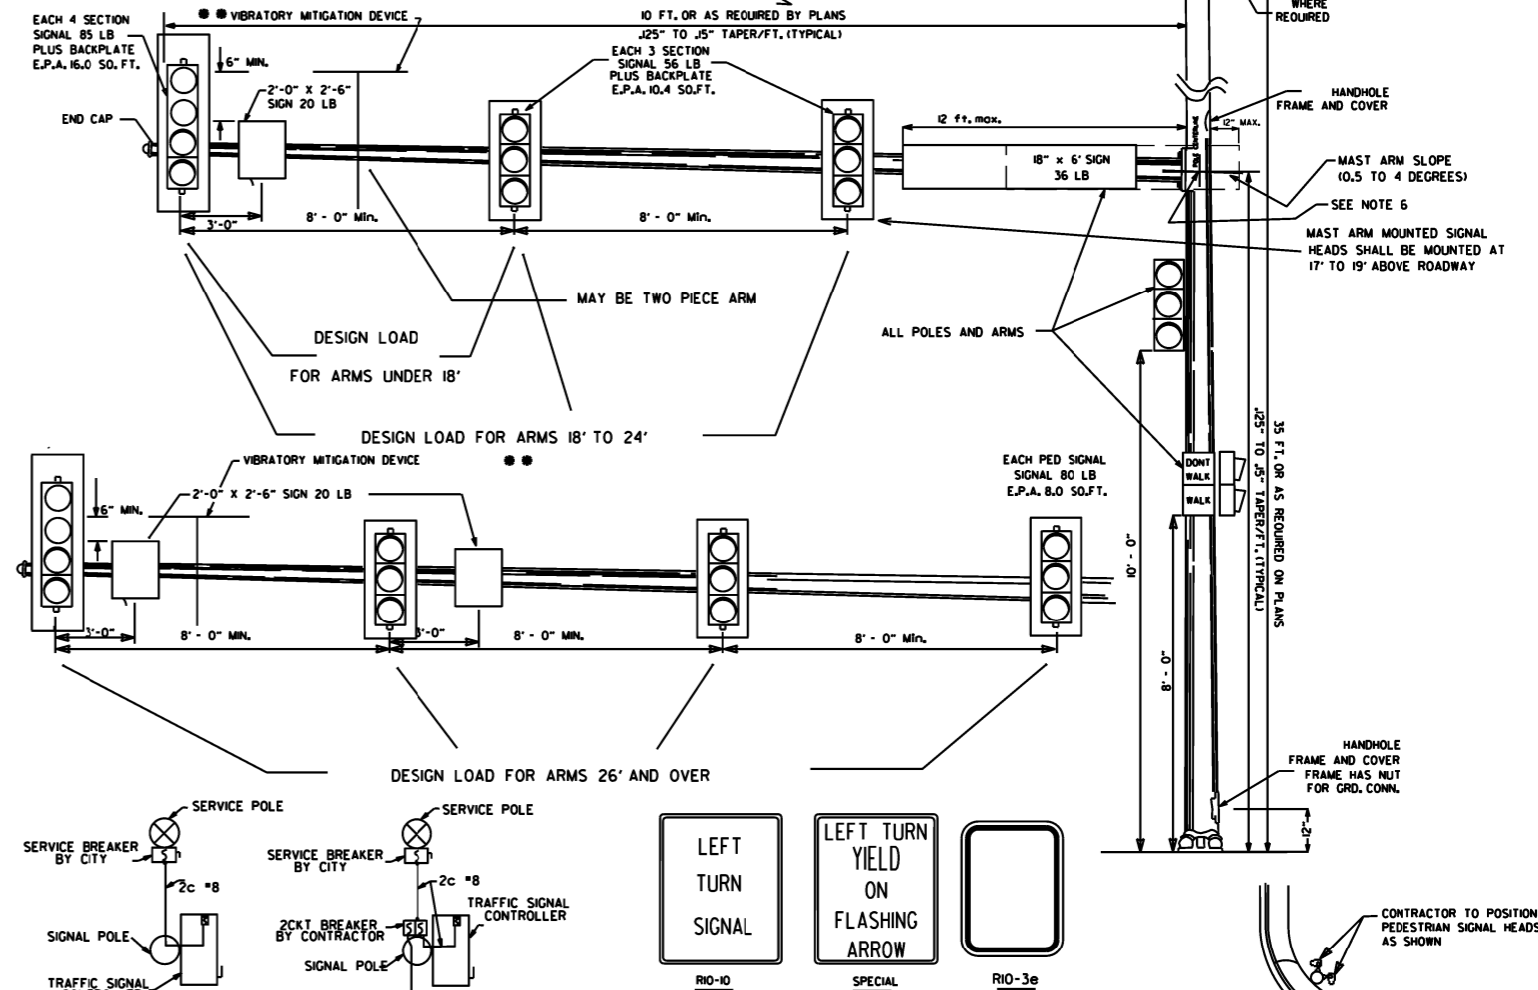


DATE	REVISION	DATE FILED
2-27-14	REVISED NOTES.	
9-12-13	ISSUED AS STANDARD DRAWING	
7-21-11	REVISED VMD SIGNAL HEADS	
5-21-09	REVISED GROUNDING	
1-31-08	REVISED GROUNDING	
4-25-08	ADDED VIBRATORY MITIGATION DEVICE & NOTES	
4-18-08	REVISED AASHTO NOTES	
4-17-08	REVISED TO 2001 AASHTO STANDARDS	
10-12-04	REVISED CABINET ORIENTATION	
6-23-04	REVISED	
5-17-04	REV. NOTE 3/AASHTO REQUIREMENTS	
6-11-01	REV. NOTES & POLE MAST ARM SLOPE	
4-11-01	REVISED POLE TAPERS	
4-25-00	REV. NOTES & SIGNAL HEAD PLACEMENT	
11-22-99	REVISED FOUNDATION DETAILS	
11-17-98	REVISED DETAILS AND NOTES	
11-21-95	ISSUED	

SPECIAL NOTE: 90 MPH WIND ZONE DESIGN, SEE NOTE 3. MINIMUM STRUCTURAL REQUIREMENTS.

ARKANSAS STATE HIGHWAY COMMISSION

STEEL POLE WITH MAST ARM


STANDARD DRAWING SD-11

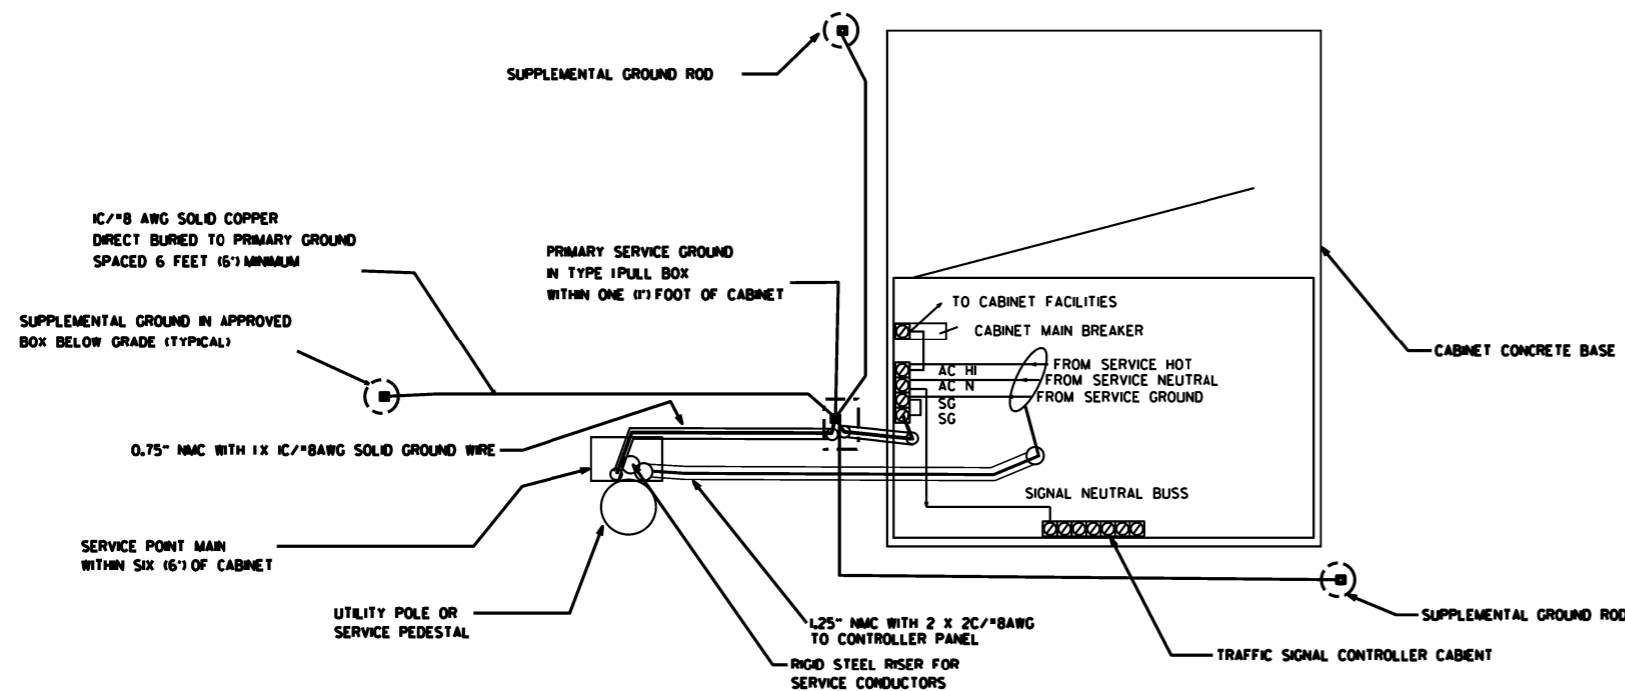

1. LOCATION OF SERVICE: TO MEET THE REQUIREMENTS FOR SAFETY AND MAXIMIZE LIGHTNING PROTECTION, THE "SERVICE POINT MAIN" FROM THE UTILITY PRIMARY SERVICE POINT MUST BE WITHIN SIX (6') FEET OF THE TRAFFIC SIGNAL CONTROLLER CABINET. ELECTRICAL SERVICE SHALL BE PROVIDED BY THE CITY/COUNTY TO A SERVICE POLE OR PEDISTAL WITH EXTERNAL RAIN TIGHT BREAKER (MAIN BREAKER) AT A MUTUALLY ACCEPTABLE POINT WITHIN THE RIGHT-OF-WAY. SERVICE POINT INCLUDES GALVANIZED STEEL CONDUIT TO A POINT 18" BELOW GROUND LINE, TWO CIRCUIT MAIN BREAKER, POWER ISOLATION ASSEMBLY WHERE REQUIRED, METER LOOP IF REQUIRED BY LOCAL UTILITY, ELECTRICAL CONDUCTORS AND WEATHERHEAD. WHERE STREET LIGHTING IS INCLUDED AS PART OF SIGNAL INSTALLATION, STREET LIGHTING CIRCUIT (2C/#12 AWG UF RATED, TYPICAL) SHALL BE KEPT SEPARATE FROM THE CIRCUIT SERVING TRAFFIC SIGNAL. SERVICE WIRE AND WIRING FROM THE CONTROLLER TO MAIN BREAKER, AND CONNECTION TO THE UTILITY IS THE RESPONSIBILITY OF THE CITY/COUNTY.


2. METER LOOP: ALL COMPONENTS OF THE SERVICE POINT WITH THE EXCEPTION OF THE WIRE AND WIRING ABOVE THE MAIN BREAKER IS FURNISHED AND INSTALLED BY THE CONTRACTOR. WIRING FROM MAIN BREAKER INCLUDING CONNECTION TO THE UTILITY, IS THE RESPONSIBILITY OF THE CITY/COUNTY. IF METER LOOP IS REQUIRED, METER BASE AND HARDWARE IS PROVIDED BY THE CITY/COUNTY AND INSTALLED BY THE CONTRACTOR.

3. SUPPLEMENTAL GROUND RODS: SUPPLEMENTAL GROUND RODS ARE FUSION WELDED TO 1 C/#8AWG. SOLID COPPER GROUND WIRE. ATTACHMENT TO PRIMARY GROUND MAY BE BY AN APPROVED CLAMP. RODS ARE LOCATED IN A BOX APPROVED BY THE ENGINEER MEETING THE SAME LOADING REQUIREMENTS AS SECTION 711 CONCRETE PULL BOX OF THE STANDARD SPECIFICATION, WITH THE EXCEPTION TO DIMENSIONS. BOX MAY BE EITHER ROUND OR SQUARE APPROXIMATELY SIX (6") INCHES MINIMUM INSIDE DIMENSIONS AND SIX (6") INCHES DEPTH. (STRONGWELL PC0608BA06 WITH PC0608CA00 LID OR EQUAL)

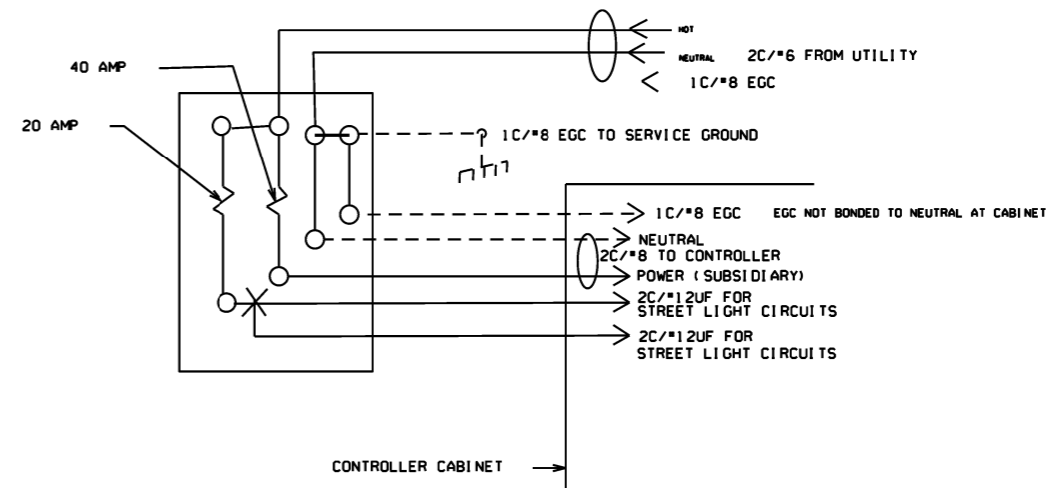







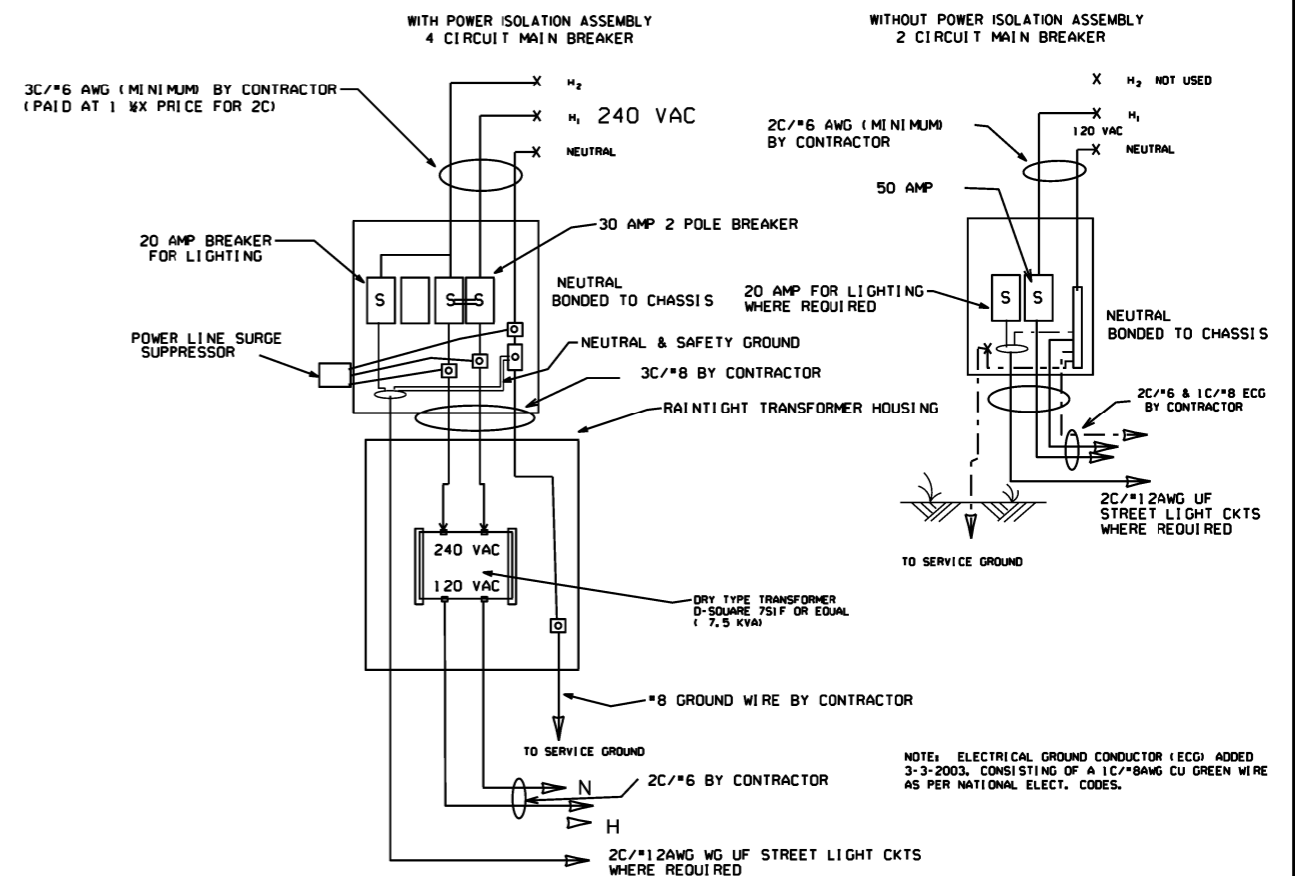






































### MAIN BREAKER WIRING (TYPICAL)

SERVICE GROUND IS TYPICALLY TIED TO NEUTRAL AT THE MAIN BREAKER. AS SUCH, CONTROLLER GROUND IS NOT TIED TO NEUTRAL AT SECONDARY BREAKER OR IN CONTROLLER CABINET.



NOTE: ELECTRICAL GROUND CONDUCTOR (EGC) ADDED 3-3-2003, CONSISTING OF A 1C/#8AWG CU GREEN WIRE AS PER NATIONAL ELECT. CODES.

			ARKANSAS STATE HIGHWAY COMMISSION
			SERVICE POINT INSTALLATION WITH SUPPLEMENTAL GROUNDING ARRAY
9-12-13	ISSUED AS STANDARD DRAWING		
1-17-08	ISSUED		
DATE	REVISION	DATE	FILM
			STANDARD DRAWING SD-12

<p>RI-1</p>  <p>STANDARD 30"x30" EXPRESSWAY 36"x36" SPECIAL 48"x48"</p>	<p>RI-2</p>  <p>STD. 36"x36"x36" EXPWY. 48"x48"x48" FWY. 60"x60"x60"</p>	<p>R2-1</p>  <p>STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"</p>	<p>W3-5</p>  <p>STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"</p>	<p>W3-5a</p>  <p>STD. 36"x36" EXPWY. 48"x48" FWY. 48"x48"</p>	<p>R4-1</p>  <p>STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"</p>	<p>R4-2</p>  <p>STD. 24"x30" EXPWY. 36"x48" FWY. 48"x60"</p>	
<p>R5-1</p>  <p>STD. 30"x30" EXPWY. 36"x36" SPECIAL 48"x48"</p>	<p>R11-2</p>  <p>48"x30"</p>	<p>R11-3A</p>  <p>60"x30"</p>	<p>R11-4</p>  <p>60"x30"</p>	<p>RSP-1</p>  <p>48"x30"</p>	<p>WI-1</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>WI-2</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	
<p>WI-3</p>  <p>STD. 48"x48"</p>	<p>WI-4</p>  <p>STD. 48"x48"</p>	<p>WI-6</p>  <p>STD. 48"x24" SPECIAL 60"x30"</p>	<p>WI-8</p>  <p>STD. 18"x24" SPECIAL 24"x30" EXPWY. 30"x36" FWY. 36"x48"</p>	<p>W3-1</p>  <p>STD. 36"x36" SPECIAL 48"x48"</p>	<p>W3-2</p>  <p>STD. 36"x36" SPECIAL 48"x48"</p>	<p>W4-2</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	
<p>W5-1</p>  <p>STD. 36"x36" SPECIAL 48"x48"</p>	<p>W6-3</p>  <p>EXPWY. 36"x36" SPECIAL 48"x48"</p>	<p>W8-7</p>  <p>EXPWY. 36"x36" FWY. 48"x48"</p>	<p>W9-2</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W13-1</p>  <p>STD. 24"x24"</p>	<p>W20-1</p>  <p>STD. 48"x48"</p>	<p>W20-2</p>  <p>STD. 48"x48"</p>	<p>W20-3</p>  <p>STD. 48"x48"</p>
<p>W20-4</p>  <p>STD. 48"x48"</p>	<p>W20-5</p>  <p>STD. 48"x48"</p>	<p>W20-7a</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W21-2</p>  <p>STD. 30"x30" SPECIAL 36"x36"</p>	<p>W21-5</p>  <p>STD. 30"x30" SPECIAL 36"x36"</p>	<p>W24-1</p>  <p>STD. 36"x36"</p>	<p>WI-4b</p>  <p>STD. 48"x48"</p>	<p>R56-1</p>  <p>STD. 18"x18"</p>
<p>W8-11</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>W8-9</p>  <p>STD. 36"x36" FWY. 48"x48"</p>	<p>G20-1</p>  <p>60"x24"</p>	<p>G20-2</p>  <p>48"x24"</p>	<p>OM-3L OM-3R</p>  <p>12"x36"</p>	<p>M4-9</p>  <p>STD. 30"x24" SPECIAL 48"x36" SPECIAL 60"x48"</p>	<p>M4-10</p>  <p>48"x18"</p>	<p>R55-1</p>  <p>36"x60"</p> <p>• USE 6" C LETTERS •• USE 4" D LETTERS</p>

ADVANCE DISTANCES  
(XXXX)

500 FT	1/2 MILE
1000 FT	3/4 MILE
1500 FT	1 MILE AHEAD

GENERAL NOTES:

- ALL TRAFFIC CONTROL DEVICES USED ON ROAD CONSTRUCTION SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION, AND TO THE STANDARD HIGHWAY SIGNS, LATEST EDITION, OR AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION.
- TRAFFIC CONTROL DEVICES SHALL BE SET UP JUST BEFORE THE START OF CONSTRUCTION OPERATIONS AND SHALL BE PROPERLY MAINTAINED DURING THE TIME SUCH CONDITIONS EXIST. THEY SHALL REMAIN IN PLACE ONLY AS LONG AS NEEDED AND REMOVED THEREAFTER.
- EXISTING SIGNS AND CONSTRUCTION SIGNS SHALL BE KEPT IN PROPER POSITION, AND BE CLEAN AND LEGIBLE AT ALL TIMES. SIGNS THAT DO NOT APPLY TO EXISTING CONDITIONS SHALL BE REMOVED. SIGNS THAT ARE DAMAGED, DEFACED, OR THAT ACCUMULATE DIRT DURING CONSTRUCTION SHALL BE CLEANED, REPAIRED, OR REPLACED.
- SIGNS ARE USUALLY MOUNTED ON A SINGLE POST, ALTHOUGH THOSE WIDER THAN 36" OR LARGER THAN 10 SQ. FT. SHALL BE MOUNTED ON TWO POSTS OR ABOVE A TYPE III BARRICADE.
- SIGN POSTS DIRECT BURIED IN SOIL SHALL BE 2 LB. MINIMUM CHANNEL POST OR 4"x4" WOOD POSTS. CHANNEL POSTS SHALL BE PAINTED GREEN. WOOD POSTS SHALL BE PAINTED WHITE. ALL POSTS SHALL BE NEATLY CONSTRUCTED, AND SHALL BE REPLUMBED, CLEANED, OR REPAIRED AS NEEDED FOR THE DURATION OF THE JOB. THERE SHALL NOT BE MORE THAN 2 POSTS IN A 7' PATH FOR WOOD OR CHANNEL POSTS. ANY CHANNEL POST SPLICE SHALL BE IN ACCORDANCE WITH STANDARD DRAWING TC-3.
- POST MOUNTED SIGNS IN RURAL AREAS SHALL BE CONSTRUCTED WITH THE NEAR EDGE OF THE SIGN FROM 6 TO 12 FEET FROM THE PAVEMENT EDGE. SIGNS IN URBAN AREAS AND BARRICADE MOUNTED SIGNS SHALL BE MOUNTED A MINIMUM OF 2 FEET FROM THE PAVEMENT EDGE.
- ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN URBAN AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE. ALL POST AND BARRICADE MOUNTED SIGNS MOUNTED IN RURAL AREAS SHALL BE MOUNTED A MINIMUM DISTANCE OF 7' FROM THE BOTTOM OF THE SIGN TO THE ROADWAY SURFACE, EXCEPT A MINIMUM OF 6' SHALL BE USED WHEN MOUNTING AN ADVISORY SIGN BELOW A WARNING SIGN. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR INTERMEDIATE TERM STATIONARY WORK CONDITIONS. THE SIGNS MINIMUM MOUNTING HEIGHT SHALL BE 5'. RETROREFLECTIVE DEVICES SHALL BE USED. TEMPORARY SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS FOR SHORT-TERM, SHORT DURATION, AND MOBILE CONDITIONS. THEY SHALL BE NO LESS THAN ONE (1) FOOT ABOVE THE TRAVELED WAY. LONG-TERM STATIONARY SIGNS SHALL BE DIRECT BURIED IN SOIL, UNLESS CONDITIONS NECESSITATE THE USE OF PORTABLE SIGNS, OR AS APPROVED BY THE ENGINEER. CONCRETE PADS, CONCRETE OR ROCK BALLAST, OR OTHER SOLID MATERIALS SHALL NOT BE UTILIZED WITH PORTABLE SIGN SUPPORTS.
- FLAGGERS SHALL USE REFLECTORIZED STOP-SLOW PADDLES. FLAGS MAY BE USED ONLY FOR EMERGENCY SITUATIONS.
- MOST OF THE SIGNS SHOWN ARE ORIENTED TO THE RIGHT. HOWEVER, THIS DOES NOT PRECLUDE THE USE OF MIRROR IMAGES OF THESE SIGNS WHERE THE REVERSE ORIENTATION MIGHT BETTER CONVEY TO MOTORISTS THE PROPER DIRECTION OF MOVEMENT.
- R55-1 SIGNS SHALL BE PLACED AT LEAST 150' BUT NOT MORE THAN 1 MILE IN ADVANCE OF THE WORK ZONE. IF A SPEED LIMIT REDUCTION IS IN EFFECT, THE SIGN SHALL BE PLACED A MINIMUM OF 500' IN ADVANCE OF THE "REDUCED SPEED AHEAD" SIGN.


• NOTE: SUPPORTS FOR SIGNS, BARRICADES, AND VERTICAL PANELS THAT ARE DIFFERENT FROM THE REQUIREMENTS SHOWN IN NOTES 4 & 5, BUT MEET THE REQUIREMENTS OF NCHRP-350 OR MANUAL FOR ASSESSING SAFETY HARDWARE (MASH), WILL BE ACCEPTED. COMPLIANCE WITH THE REQUIREMENTS OF NCHRP-350 OR MANUAL FOR ASSESSING SAFETY HARDWARE (MASH) IS REQUIRED FOR ALL PROJECTS.

DATE	REVISION	FILMED
9-2-15	REVISED REDUCED SPEED LIMIT AHEAD SIGNS	
	REVISED ROAD WORK NEXT XX MILES	
12-15-11	REVISED W24-1	
11-17-10	DELETED W8-9a & ADDED W8-9	
10-15-09	ADDED REFERENCE TO MASH & ADDED SIGN W24-1	
4-17-08	REVISED SIGN DESIGNATIONS	
11-18-04	REVISED NOTES	
10-9-03	REVISED NOTE 1	
11-16-01	REVISED NOTE 7	
9-28-00	REVISED NOTE	
11-18-98	ADDED NOTE	
6-26-97	REVISED NOTE 5	
4-03-97	REVISED NOTE 5	
10-18-96	ADDED CONTROLLED ACCESS HWY. SIGN & TO NOTE 7	
10-12-95	ADDED R55-1	
6-8-95	REVISED TO CORRECT SIGN ILLUSTRATIONS	6-8-95
2-2-95	REVISED PER PART VI, MUTCD SEPT. 3, 1993	
8-15-91	DRAWN AND PLACED IN USE	


ARKANSAS STATE HIGHWAY COMMISSION  
STANDARD TRAFFIC CONTROLS  
FOR HIGHWAY CONSTRUCTION  
STANDARD DRAWING TC-1

**GENERAL NOTES**


INSTALL A MINIMUM OF 2 UPSLOPE STAKES AND 4 DOWNSLOPE STAKES AT AN ANGLE TO WEDGE WATTLE TO BOTTOM OF DITCH.

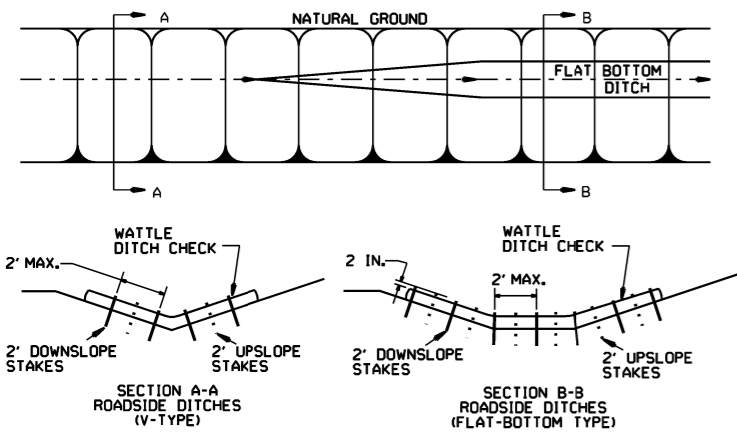

**WATTLE DITCH CHECK (E-1)**

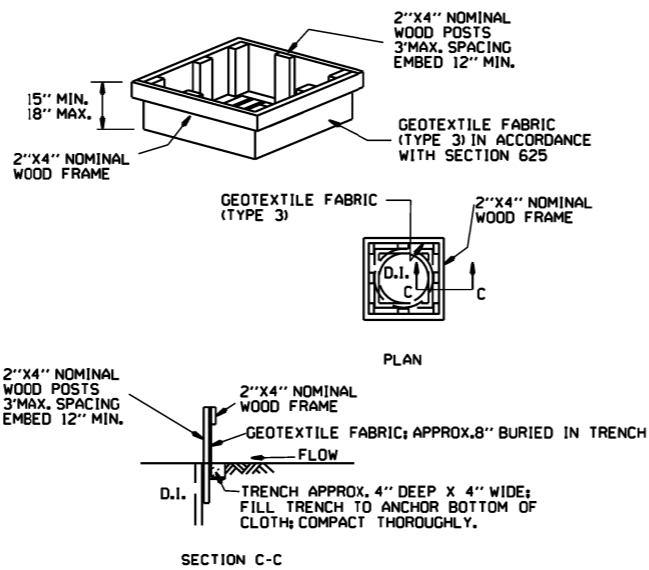

**DROP INLET SILT FENCE (E-7)**

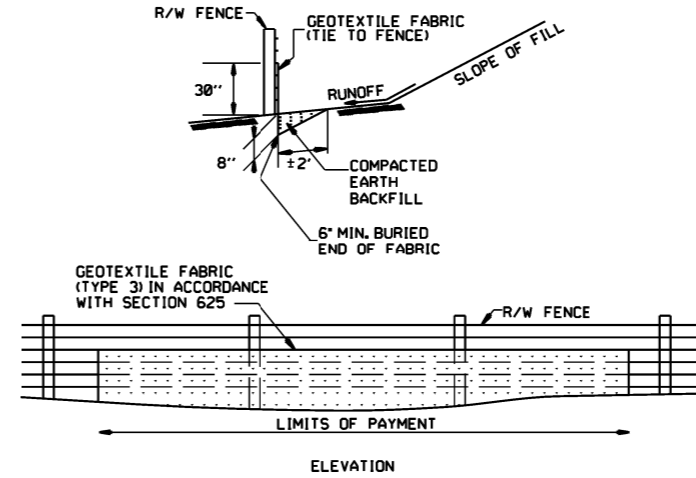


**SILT FENCE ON R/W FENCE (E-4)**

**GENERAL NOTES**  
 GEOTEXTILE FABRIC SHALL BE SPLICED TOGETHER WITH A SEWN SEAM ONLY AT A SUPPORT POST, OR TWO SECTIONS OF FENCE MAY BE OVERLAPPED INSTEAD. PAYMENT OF ADDITIONAL MATERIAL FOR OVERLAP WILL NOT BE MADE.


**GENERAL NOTES**

1. STRAW BALES SHALL BE INSTALLED SO THAT THE BINDINGS ARE ORIENTED AROUND THE SIDES RATHER THAN ALONG THE TOPS AND BOTTOMS OF THE BALES. THE BALES SHALL BE A MINIMUM OF 30 INCHES IN LENGTH.
2. NO GAPS SHALL BE LEFT BETWEEN BALES.
3. BALED STRAW FILTER BARRIERS COMPLETED AND ACCEPTED WILL BE MEASURED BY THE BALE IN PLACE AS AUTHORIZED BY THE ENGINEER AND WILL BE PAID FOR AT THE CONTRACT UNIT PRICE BID PER BALE FOR BALED STRAW DITCH CHECKS.

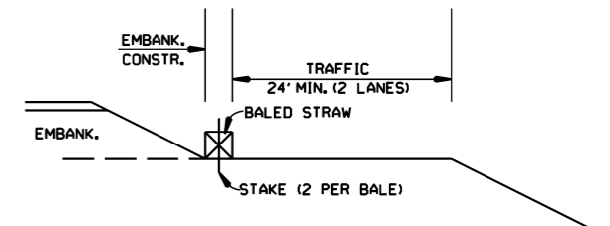


**BALED STRAW FILTER BARRIER (E-2)**

NUMBER OF SAND BAGS AND ARRANGEMENT VARIABLE WITH ON-SITE CONDITIONS. PLACE SAND BAGS AT BASE OF DITCH CHECK IN AREA OF OVERFLOW.

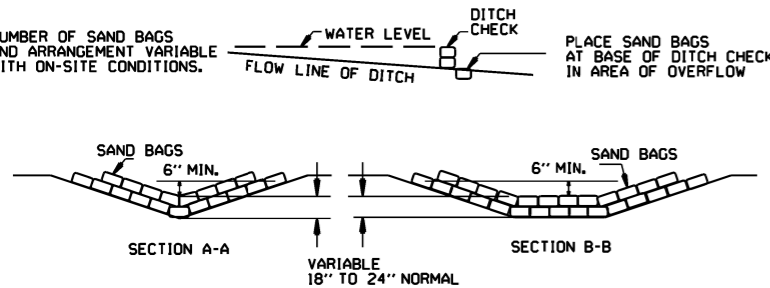


**SAND BAG DITCH CHECK (E-5)**

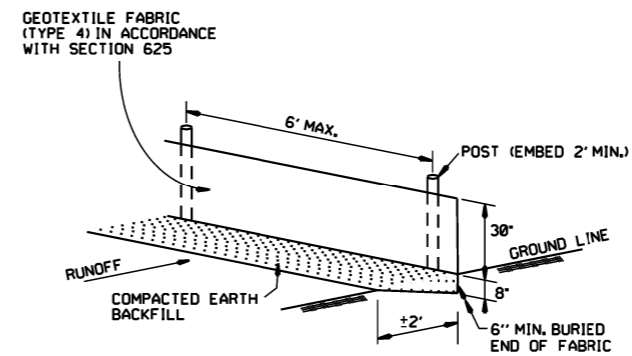

**SILT FENCE (E-11)**

**GENERAL NOTES**  
 GEOTEXTILE FABRIC SHALL BE SPLICED TOGETHER WITH A SEWN SEAM ONLY AT A SUPPORT POST OR TWO SECTIONS OF FENCE MAY BE OVERLAPPED INSTEAD. PAYMENT OF ADDITIONAL MATERIAL FOR OVERLAP WILL NOT BE MADE.

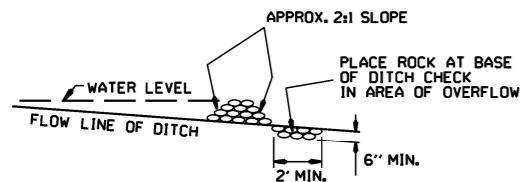





**ROCK DITCH CHECK (E-6)**

12-15-11	DELETED BALED STRAW DITCH CHECK & ADDED WATTLE DITCH CHECK	
11-18-98	ADDED NOTES	
7-02-98	ADDED BALED STRAW FILTER BARRIER (E-2)	
7-20-95	REVISED SILT FENCE E-4 AND E-11	7-20-95
7-15-94	REV. E-4 & E-11 MIN. 13" BURIED END OF FABRIC	
6-2-94	REVISED E-1,4,7 & 11; DELETED E-2 & 3	6-2-94
4-1-93	REDRAWN	
10-1-92	REDRAWN	
8-2-76	ISSUED R.D.M.	298-7-28-76
DATE	REVISION	FILMED

**ARKANSAS STATE HIGHWAY COMMISSION**


**TEMPORARY EROSION CONTROL DEVICES**

**STANDARD DRAWING TEC-1**

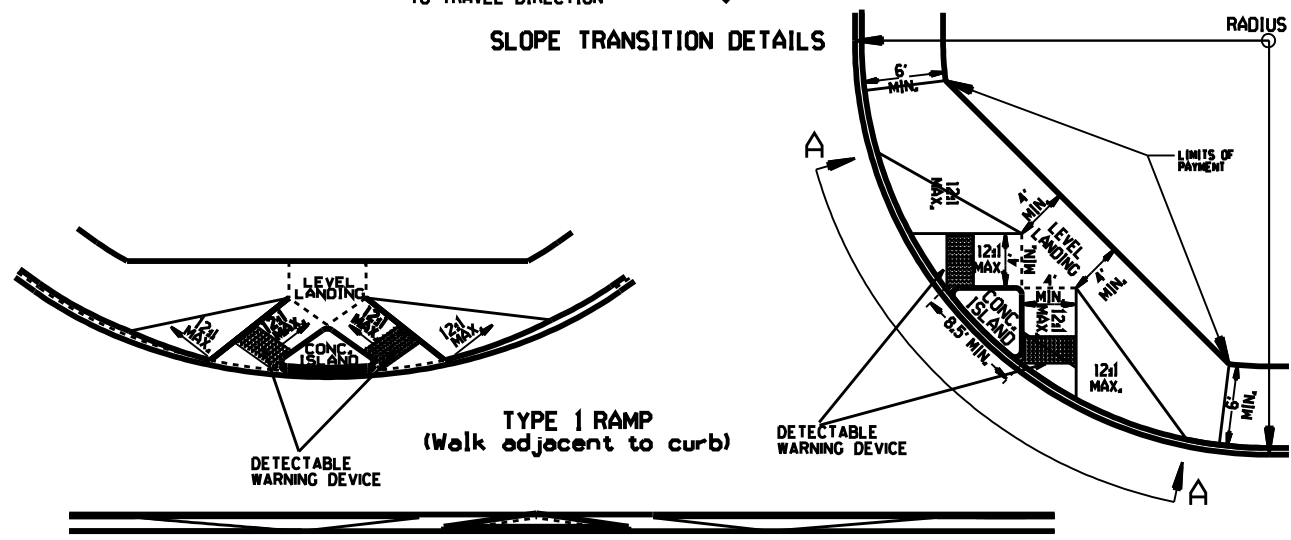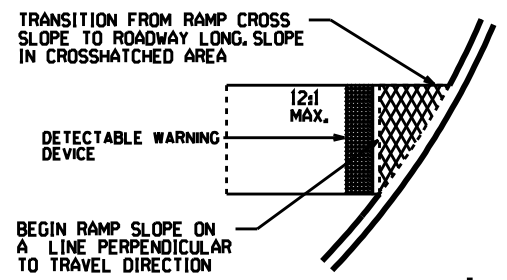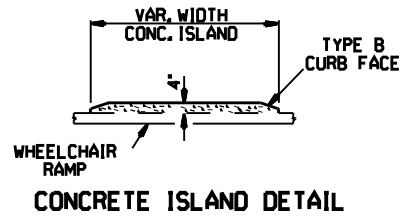


TYPE 1 RAMP DIMENSIONS AND QUANTITIES

RADIUS "R" FEET	DISTANCE "X" FEET	DISTANCE "Y" FEET	LENGTH "L" FEET	RAMP AREA "A" SQ. YD.
15	11.67	18.82	32.18	26.21
20	11.52	22.28	35.46	30.07
25	11.43	26.60	38.77	33.80
30	11.37	30.26	40.93	36.90
35	11.33	33.51	43.11	39.77
40	11.30	36.45	45.26	42.45
45	11.27	39.16	47.34	44.97
50	11.25	41.69	49.36	47.35
55	11.24	44.07	51.31	49.63
60	11.22	46.33	53.21	51.80

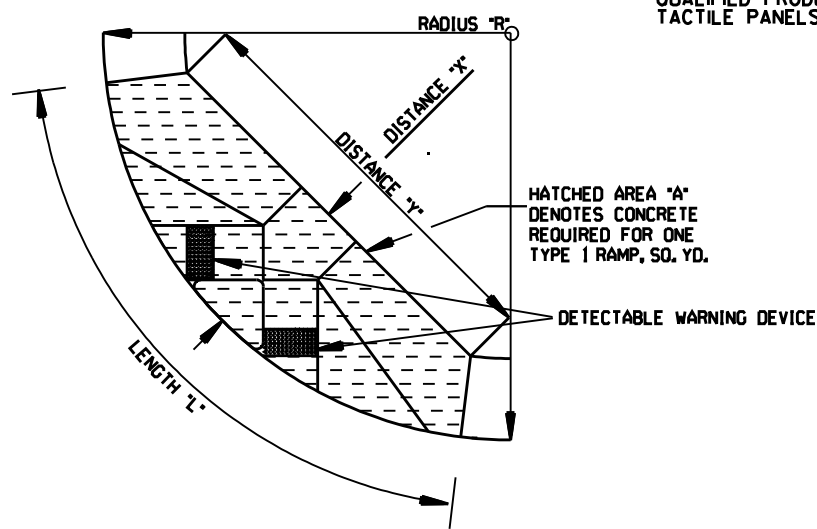





GENERAL NOTES FOR DETECTABLE WARNING DEVICES  
THE DETECTABLE WARNING DEVICE SHALL BE LOCATED SO THAT THE NEAREST EDGE OF THE DEVICE IS 6 TO 8 INCHES FROM THE FACE OF THE CURB. TRUNCATED DOMES IN THE DETECTABLE WARNING SURFACE SHALL MEET THE REQUIREMENTS OF THE GEOMETRIC CONFIGURATION SHOWN. DOMES SHALL BE ALIGNED ON A SQUARE GRID IN THE PREDOMINANT DIRECTION OF TRAVEL TO PERMIT WHEELS TO ROLL BETWEEN DOMES. DETECTABLE WARNING DEVICE SHALL BE 24 INCHES IN THE DIRECTION OF TRAVEL AND EXTEND THE FULL WIDTH OF THE CURB RAMP OR FLUSH SURFACE. DETECTABLE WARNING DEVICE SHALL BE ON THE AHTD QUALIFIED PRODUCTS LIST FOR CAST-IN-PLACE TACTILE PANELS (ADA DETECTABLE WARNING).

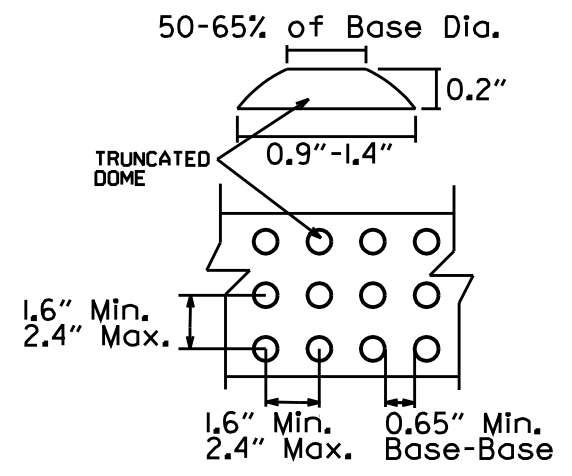

DETECTABLE WARNING DEVICE DETAIL

GENERAL NOTES:  
IN NEW CONSTRUCTION, UNLESS OTHERWISE INDICATED ON THE PLANS, WHEELCHAIR RAMPS ARE TO BE PROVIDED AT ALL CORNERS OF CURBED STREET INTERSECTIONS AND MID-BLOCK CROSSWALK LOCATIONS.  
IN ALTERATIONS WHEELCHAIR RAMPS ARE TO BE PROVIDED AT CURBED STREET INTERSECTIONS WITH PEDESTRIAN TRAFFIC AND MID-BLOCK CROSSWALK LOCATIONS.  
THE LENGTH OF THE RAMP SHALL BE SUCH THAT THE SLOPE DOES NOT EXCEED 12:1. THE SURFACE TEXTURE OF THE RAMP SHALL CONFORM TO A CLASS 6 FINISH ACCORDING TO SECTION 802.19.  
THE NORMAL GUTTER GRADE SHALL BE MAINTAINED THROUGH THE AREA OF THE RAMP.  
ALL PAVEMENT MARKINGS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES PUBLISHED BY THE FEDERAL HIGHWAY ADMINISTRATION.  
THE MINIMUM THICKNESS OF THE RAMP, WALK, & LANDING SHALL BE 4". THE MINIMUM WIDTH OF THE RAMPS SHALL BE THE WALK WIDTH OR 36", WHICHEVER IS GREATER.  
RAMPS SHALL BE MODIFIED AS NECESSARY TO INSURE THAT THEY ARE PARALLEL TO A LINE DRAWN FROM THE CENTER OF ONE RAMP TO THE CENTER OF THE RAMP ON THE OPPOSITE SIDE OF THE INTERSECTION.  
THE DIMENSIONS AND QUANTITIES SHOWN ON THIS DRAWING ARE FOR A 90° INTERSECTION ONLY. DIMENSIONS AND QUANTITIES FOR SKEWED INTERSECTIONS WILL VARY, AND ARE TO BE DETERMINED BY THE ENGINEER.

NOTE:  
THE CROSS SLOPE OF THE RAMPS, LEVEL LANDINGS, AND SIDEWALKS SHALL NOT EXCEED 2.0% UNLESS REQUIRED TO MATCH STREET LONGITUDINAL GRADE.

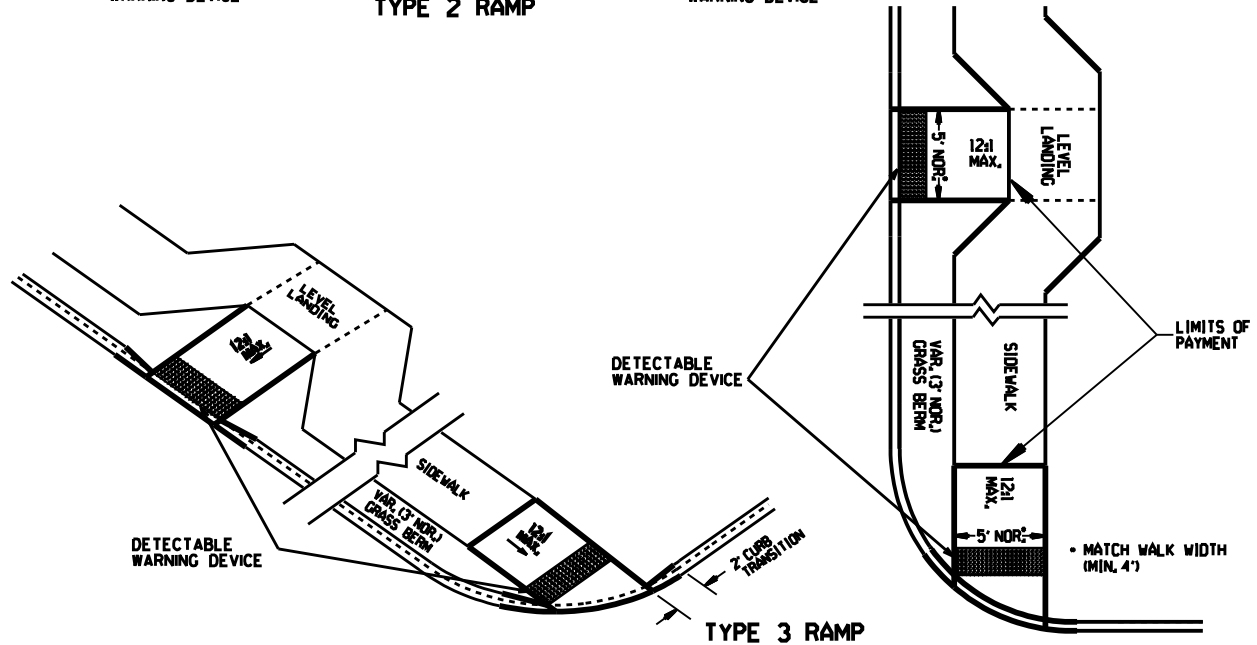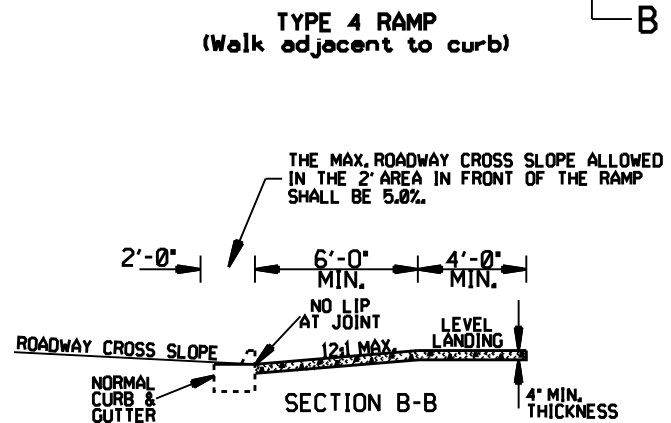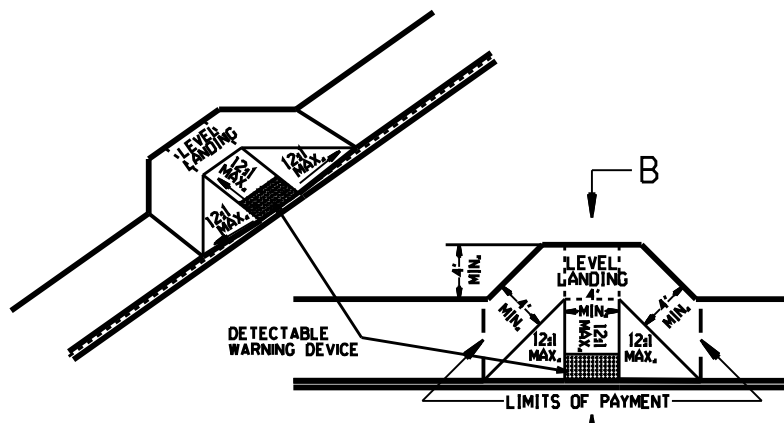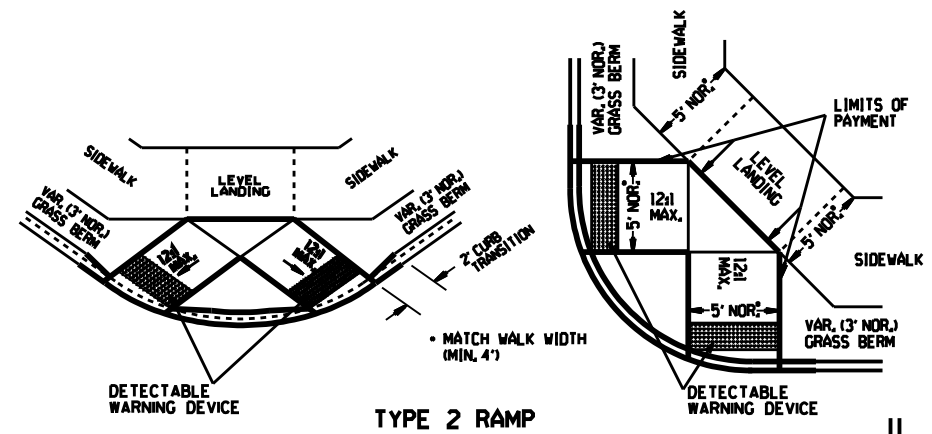

RAMP SELECTION CRITERIA

CHOICE	TYPE	DESCRIPTION
FIRST CHOICE	TYPE 1	CORNER LOCATIONS WITH THE WALK ADJACENT TO THE CURB (BOTH NEW CONSTRUCTION AND ALTERATIONS).
	TYPE 2	CORNER LOCATIONS WITH THE WALK OFFSET FROM THE CURB A DISTANCE INSUFFICIENT TO ALLOW THE REQUIRED RAMP SLOPE (BOTH NEW CONSTRUCTION AND ALTERATIONS).
	TYPE 3	CORNER LOCATIONS WITH THE WALK OFFSET FROM THE CURB A DISTANCE SUFFICIENT TO ALLOW THE REQUIRED RAMP SLOPE (BOTH NEW CONSTRUCTION AND ALTERATIONS).
	TYPE 4	TANGENT LOCATIONS (BOTH NEW CONSTRUCTION AND ALTERATIONS).
SECOND CHOICE	TYPE 5	TANGENT LOCATIONS (ALTERATIONS ONLY).
THIRD CHOICE	TYPE 6	CORNER LOCATIONS (ALTERATIONS ONLY). THIS RAMP MAY BE USED ONLY IF THE TYPE 5 RAMPS CANNOT BE PLACED AT THE ENDS OF THE RADIUS.
FOURTH CHOICE		IF SITE CONSTRAINTS PREVENT THE CONSTRUCTION OF ANY OF THE TYPES LISTED, THEN AND ONLY THEN CAN THE 12:1 MAX. SLOPE ON THE RAMP BE EXCEEDED TO PROVIDE ACCESS TO THE STREET LEVEL (ALTERATIONS ONLY). THE SLOPE CAN BE STEEPENED TO A 10:1 MAX. FOR A MAX. LENGTH OF 5' OR A 8:1 MAX. FOR A MAX. LENGTH OF 2'. SLOPES STEEPER THAN 8:1 ARE NOT ALLOWED UNDER ANY CIRCUMSTANCES.

NOTE: IN ALTERATIONS, THE SELECTION OF THE TYPE OF WHEELCHAIR RAMP TO BE CONSTRUCTED SHALL BE BASED ON THE AMOUNT OF RIGHT-OF-WAY AVAILABLE, AND ON THE PRESENCE OF OTHER SITE CONSTRAINTS (UTILITIES, BUILDINGS, ETC.). THE TABLE ABOVE LISTS THE ORDER IN WHICH THE RAMPS ARE TO BE CONSIDERED. AN ALTERATION IS DEFINED AS A PROJECT THAT CHANGES OR AFFECTS THE USE OF A PEDESTRIAN PATHWAY (OVERLAYS, SIGNALIZATION PROJECTS, ETC.) BUT DOES NOT REQUIRE THE PURCHASE OF ADDITIONAL RIGHT-OF-WAY. ALL PROJECTS THAT REQUIRE THE PURCHASE OF ADDITIONAL RIGHT-OF-WAY WILL USUALLY BE CONSIDERED NEW CONSTRUCTION FOR THE PURPOSES OF THE CHART ABOVE.

DATE	REVISION	DATE FILED
8-10-05	REVISED TO NEW SIDEWALK POLICY	
10-9-03	REVISED GEN. NOTES & ADDED NOTE	
4-10-03	REV. DETECTABLE WARNING DEVICES	
8-22-02	ADD DETECTABLE WARNING DEVICES	
3-30-00	ADD SLOPE TRANS. & REV. ISL. DIMS.	
5-18-98	REVISED NOTES	
8-12-98	REVISED TEXTURE	
7-02-98	REDRAWN & REISSUED	
10-18-96	CORRECTED DIMENSIONS	10-18-96
5-24-90	FROM 8:1 TO 12:1 MAX. SLOPES	5-24-90
7-15-88	ADJUSTED MAX. SLOPE	652-7-15-88
7-14-88	INCL. "CONC. ISL." IN PAY ITEM	
6-02-76	ISSUED P.H.D.	299-7-28-76

ARKANSAS STATE HIGHWAY COMMISSION  
WHEELCHAIR RAMPS  
NEW CONSTRUCTION  
AND ALTERATIONS  
STANDARD DRAWING WR-1